

MOBILE BAR SOLUTION

Up to 4 Lines - Split

2 Refrigerated + 2 Ambient



MBS67-T5

Leased Equipment:


- Pour Control System
- Push to Pour® Control
- One 2-Line Tap Tower
- One 2-line Chilling Dispenser
- Up to four Sestra Touchless Taps™ (Model-C or Model-S)
- Up to two Sestra Smart FOBs™ (beverage dependent)
- All Tubing and Connectors

Purchased Equipment:

- One Mobile Cart (multiple finish options available)
- Perlick DDS36 (refer to Perlick for specs)
- Keg Couplers
- Gas Kit (as needed)

Optional Upgrades:

- Finishes – Multiple side, top, and frame options
- Customization

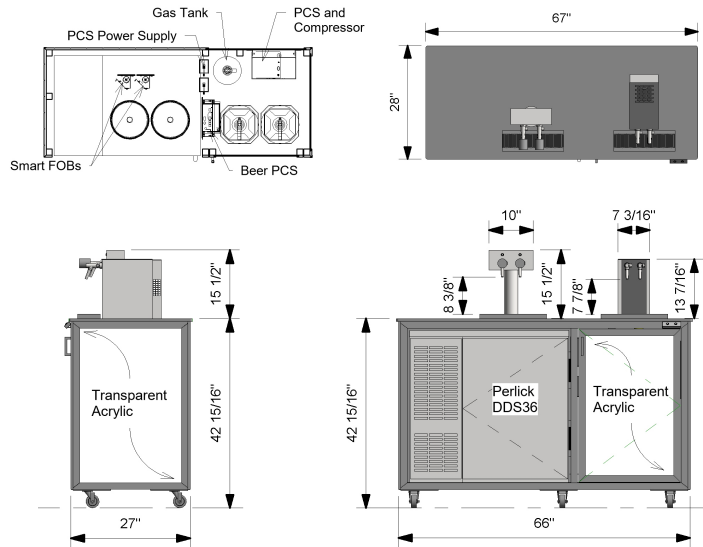

TECHNICAL SPECIFICATIONS

Dimensions	67" W x 28" D x 58.5" H (approximate total)	
Weight	1300 lbs. (approximate with full kegs)	
Power Requirements	Dedicated 120V/60Hz/1ph, 20A circuit for NEMA 5-15P near each station	
Connectivity	Internet access required via standard Ethernet port (RJ45) (preferred) or WiFi	
Drainage & Plumbing	No site draining or plumbing required	
Ventilation	12" clearance in front of the fridge condenser and 12" ventilation clearance above dispenser	
	<i>Refrigerator</i>	<i>Ambient Cabinet</i>
Chilling & Refrigerant	--	Continuous 20 L / hour in-line chilling : R134A
Temperature Range	33 to 37 degrees Fahrenheit	36 to 70 degrees Fahrenheit

BEVERAGE & KEG OPTIONS

	<i>Refrigerator</i>	<i>Ambient Cabinet</i>
Wine	Up to 2 - 20 L (5.28gal) Kegs	Up to 2 - 20 L (5.28 gal) Kegs
Beer	Up to 2 - Sixtel (5.28 gal) Kegs	--
Cocktails	Up to 2 - 20 L (5.28 gal) Kegs	--
Kombucha	Up to 2 - 20 L (5.28 gal) Kegs	--
Cold Brew	Up to 2 - 20 L (5.28 gal) Kegs	--
Gas Tank	Max Size 20 lbs. - will replace ambient keg space	



NSF 51 & NSF 61 Certified – Pour Control System and Chilling Dispenser. All contact materials are NSF certified and/or meet FDA requirements for contact application.

Property of Sestra Systems, Inc.
©2020 All Rights Reserved.
www.sestrasystems.com 120619-O-7.1