

# SIGNAL VISORS

Aluminum  
Polycarbonate

Cap  
Full Circle  
Scoop  
Tunnel  
45° Angle



- CABINETS
- CONTROLLERS
- DETECTION
- PARKING
- SIGNALS**
- SIGNS
- SOFTWARE
- SPECIALTY

## Overview

McCain's Signal Visors increase signal visibility in sunlight while still allowing an unobstructed view for multiple lanes of approaching drivers, cyclists, and pedestrians. McCain produces a range of standard and angled visors including tunnel, full circle, scoop, and cap that offer a variety of signal viewing angles. Whether you are looking for aluminum or polycarbonate, federal yellow, signal green, black, or custom colors, McCain has the visors to meet your needs.

## Benefits

- Increases signal visibility in sunlight
- Available in a variety of materials, sizes, styles, and angles to meet your specific requirements
- Twist-on tabs facilitate ease of installation
- One-piece construction (except Scoop Visor)

## Product Description

McCain's Signal Visors, molded polycarbonate or stamped and formed aluminum, are available in eight inch and 11 inch signal configurations. Integrally formed, twist-on mounting tabs make installation and maintenance a snap, and a standard three degree downward tilt facilitates signal visibility.





Specialty visors include the 45° Angle Visor and the Scoop Visor. The 45° Angle Visor comes in two standard lengths, 18" and 27" and in right and left versions. It is designed to narrow visibility for locations such as an angled intersection.

The Scoop Visor is designed to resist snow build-up on signal lenses in colder climates. A louvered vent on top and an open bottom contribute to the increased vertical movement of air across the face of the signal lens thereby increasing resistance to the deposit of snow.

# Signal Visors

## Standard Features

- One-piece construction (except Scoop)
- Twist-on mounting tabs
- 3° downward tilt

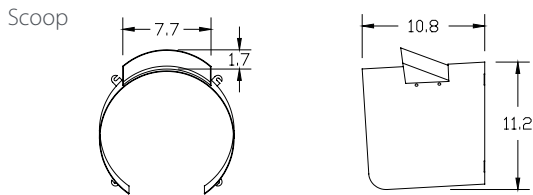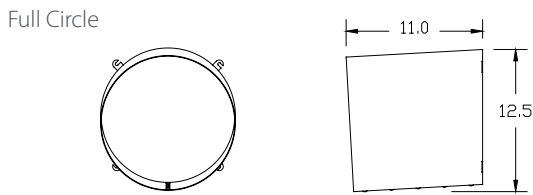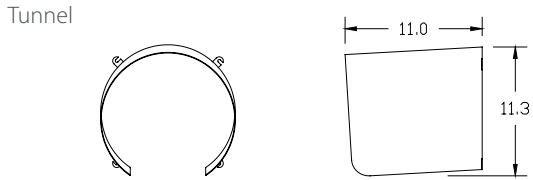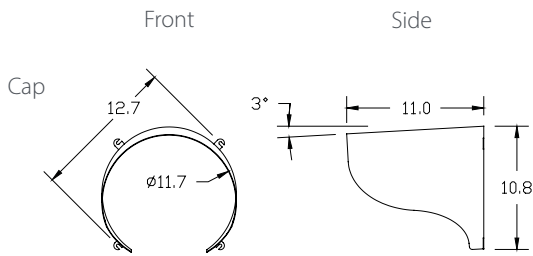


## General Specifications

| Dimensions:       |  | Diameter | Depth |
|-------------------|--|----------|-------|
| Standard Visors:  | 8"   | 8"       | 8"    |
|                   | 11"  | 11"      | 11"   |
|                   | 11"  | 11"      | 11"   |
| 45° Angle Visors: | 8"   | 8"       | 18"   |
|                   | 11"  | 11"      | 18"   |
|                   | 11"  | 11"      | 27"   |
| Degree of Tilt:   | 3° (down)  |          |       |
| Material:         | Aluminum: Type 3003, very good corrosion resistance, 0.050" thick  |          |       |
|                   | Polycarbonate (standard visors only): Ultraviolet and heat stabilized, flame retardant, permanently colored, 0.10" nominal thickness |          |       |
| Finish(es):       | Aluminum: Powder coated  |          |       |
|                   | Polycarbonate (standard visors only): Colored resins integral to visor   |          |       |
| Color(s):         | Exterior: Federal yellow, signal green, black, or custom   |          |       |
|                   | Interior: Flat black   |          |       |
| Mounting:         | Twist-on tabs  |          |       |
| Shipping Weight:  | 1 - 4 lbs., varies based on material, size, and style  |          |       |


## Options

- Other lengths available
- Degree of tilt

45° (18" right angle version)

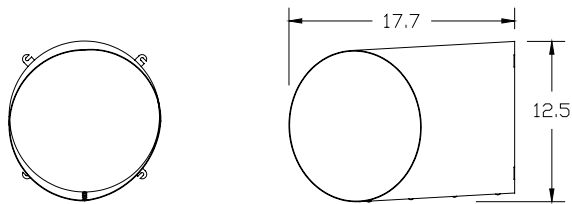

Top



Dimensions rounded to the nearest 0.1"  
 All visors shown are 11" signal versions  
 Dimensions shown in Cap front view and degree of tilt shown in side view are typical of all 11" visors (except 45°)