

COLLABORATION SOFTWARE


With

Windows collaboration display by



T1V ThinkHub with Avocor

The Windows collaboration display by Avocor paired with T1V ThinkHub software consolidates all the moving pieces of teamwork – devices, applications, people, ideas, and content critical to achieving great work, all at your fingertips. T1V collaboration solutions have been tested and optimized for all Avocor displays and the bundled solution is available through T1V.

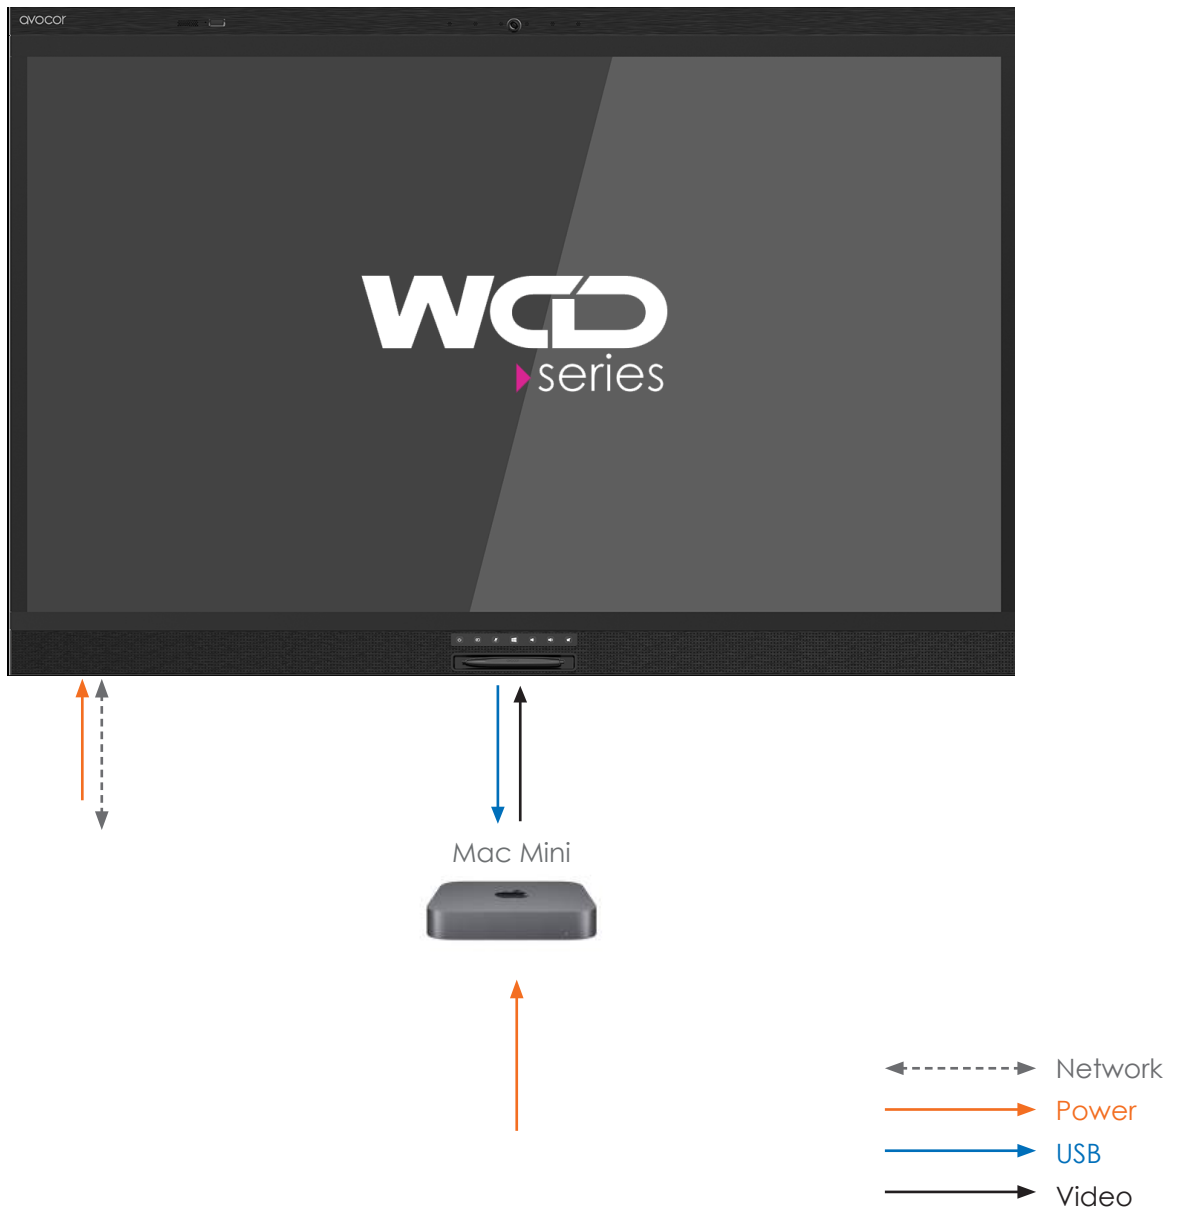

DISPLAY

Diagonal Size (Inch)	65
Backlight	Direct LED
Aspect Ratio	16:9
Resolution	4K, 3840 x 2160 @ 60Hz
Brightness	370 (cd/m2)
Viewing Angle	178/178
Supported Colors	30-bit deep color
Display Orientation	Landscape

TOUCH SYSTEM

Interface	1 x USB Type C, 3 x USB-B 3.0
Touch	Up to 20-point InGlass™ Intelligent Touch Support up to 4 fine-tip stylus with eraser Simultaneous pen and touch*
Glass	2mm optically bonded, anti-glare, anti-fingerprint glass
Supported Operating System	Windows 7/8/10 Mac OSX Linux

AUDIO

Built-in Speakers	Stereo - 2 x 30W
Microphone Array	4 beam-forming, linear array, far-field, SSP, AEC, ANS, DRC, EQ

CAMERA

Integrated Conference	6 element aspherical glass lens, 60fps Full HD CMOS, AE/AWB,AF,AGC,WDR, super-wide 120° FoV
-----------------------	---

CONNECTIVITY

Standard I/O	Type C (DisplayPort Alt mode, 4K 60Hz, USB HID, PD power, ethernet), 1 x DisplayPort, 2 x HDMI, 3 x USB-B 3.0, 1 x USB-A 3.0 HID
Audio	1 x 3.5mm audio out, 1 x optical (SPDIF)
Control	1 x RS-232, 1 x IR input
Ethernet	2 x RJ-45

PHYSICAL SPECIFICATIONS

Product Dimensions	1586(W) x 1039(H) x 111.5(D) mm 62.5(W) x 40.9(H) x 4.4(D) inch
Shipping Dimensions	1695(W) x 1237(H) x 520(D) mm 66.7(W) x 48.7(H) x 20.5(D) inch
Weight	55kg 121lbs
VESA wall mounting points	600 mm x 400 mm 23.6 inch x 15.7 inch
IPC Mount	75 x 75 mm 2.9 x 2.9 inch (included 100 x 100mm adapter plate)
Handles	Yes

AZURE SMART SPACES DATA

Ambient Room Temperature	°F or °C
Room brightness	Lux
Proximity	Yes

WCD FUNCTIONS

Auto-power detection	Yes, based on Proximity Sensor
Auto-source detection	Yes + Smart Switching
IOT data reporting	Yes + adjustable data telemetry interval

POWER

Power Supply	AC100-240V (Worldwide), 50/60Hz
Maximum Power Consumption	<220W
Standby	≤0.5W

ENVIRONMENTAL

Operating Temperature	0°C ~ 40°C
Storage Temperature	-20°C ~ 60°C
Humidity	30% ~ 85%

WHAT COMES IN THE BOX

1 x remote control & batteries, 2 x 2mm pen with eraser tip, Power cables (1 x US, 1 x UK, 1 x EU, 1 x Australia/NZ), 1 x USB-B 3.0 cable, 1 x HDMI cable, 1 x Type C cable, 5 x cable clips, 1 x VESA 75 x 75 / 100 x 100 adapter plate, 1 x quick start guide

WARRANTY

3 year warranty - for regional details and upgrade options, please visit www.avocor.com/faq/avocor-global-warranty