


S-5-U

M8-1.25 Threaded Hole

Top

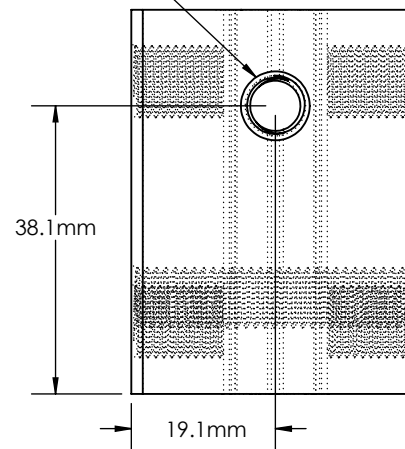

S-5!


22.9mm

10.2mm


13.7mm

Scale 1:1


Back

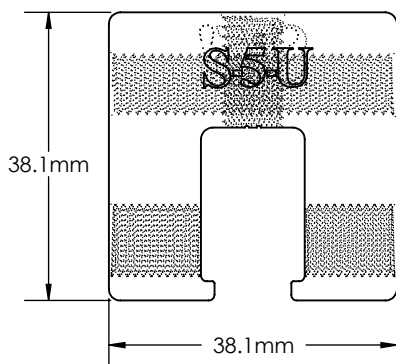


Left

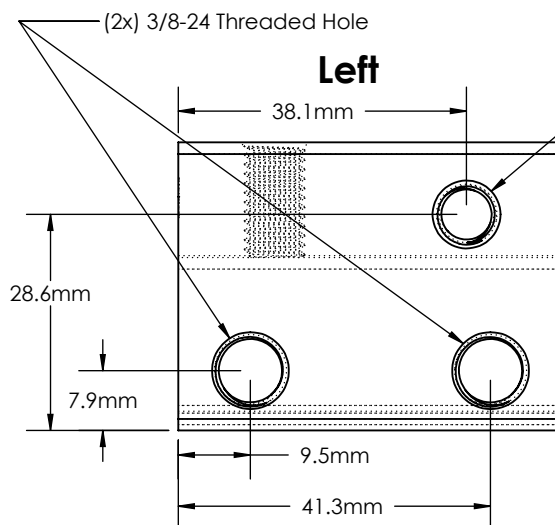

Front

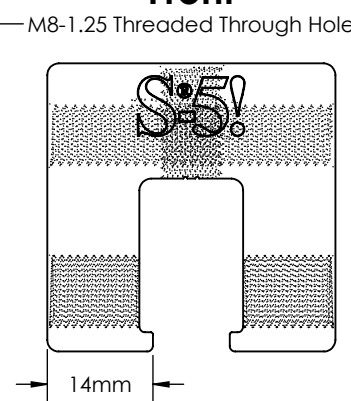


Right

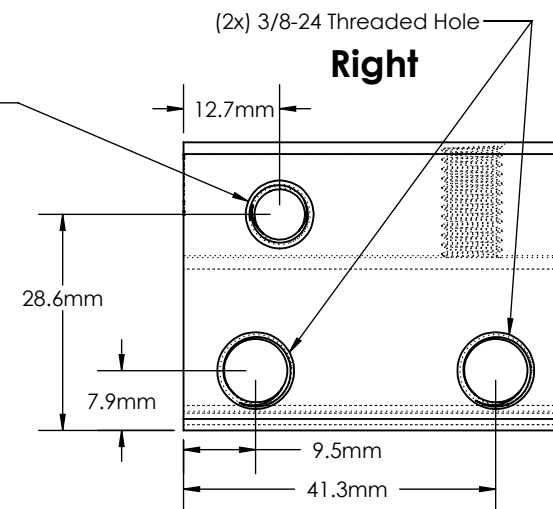


General Notes:

1. S-5-U Clamp
2. M8-1.25 SS Hex Flange Bolt (13mm Socket)
3. 3/8-24 SS Round Point Setscrew (3/16 Hex Drive)
4. Example roof

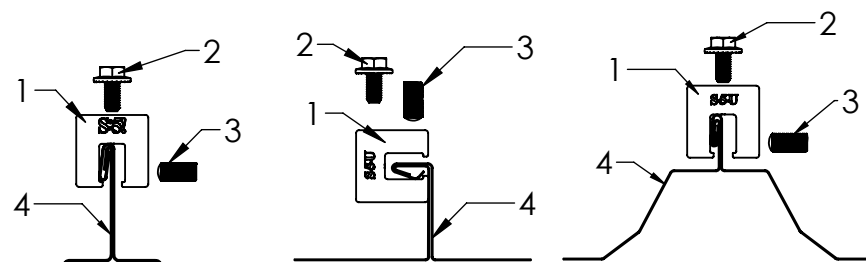

FOR STANDING SEAM SPECIFIC MECHANICAL LOAD TEST INFORMATION AND CLAMP INSTALLATION INFORMATION PLEASE VISIT: WWW.S-5.COM

MATERIAL: 6061 T6 Al	 <p>METAL ROOF INNOVATIONS, LTD. 8655 TABLE BUTTE RD COLORADO SPRINGS, CO 80908 719-495-0518 719-495-0045(FAX)</p>		
EST ASSEMBLY WEIGHT: 168.96 g	<p>TITLE S-5-U</p>		
SUPPLIED HARDWARE: M8-1.25 x 16 mm HEX Bolt (2x) 3/8-24 x .800" Setscrews	SCALE: 1:1	DRAWING NO. U11-B-16-D	DRAWN BY Kati Kadakas
EST. WEIGHT: Clamp: 137.89 g Setscrew: 7.71 g Bolt: 15.65 g	<p>DATE 4/11/2016</p> <p>S-5!® PRODUCTS ARE PROTECTED BY MULTIPLE U.S. AND FOREIGN PATENTS. VISIT OUR WEBSITE AT WWW.S-5.COM FOR COMPLETE INFORMATION ON PATENTS AND TRADEMARKS.</p>		