



Solenoid Valves



ElectroFlo and ElectroSteam

- Solenoid Valves:
- 2 Way Normally Closed
- Pilot Operated
- Piston Type
- UL Listed
- Bronze Construction
- Available in 24, 120, 208 & 240 AC Volts
- Available in 12 & 24 DC Volts
- Pressure Range 5-150 psi water
- Maximum Temperature (2110) 195° F
- Maximum Temperature (2192) 365° F
- Horizontal Installation with Solenoid in Vertical Position
- Average Closing Time: 3/8"-3/4", 1-3 Seconds
- Average Closing Time: 1"-2", 2-5 Seconds
- Reliable Operation-Millions of Cycles
- Internals Easily Accessed for Maintenance
- Valve Should Be Sized to Flow Requirement, Not Pipe Size




Typical Applications

- Commercial Laundry Equipment & Facilities
- Commercial Dishwashers, Bottle Washers, Pot/Pan Washers
- Car & Truck Wash Facilities
- Irrigation Systems
- Humidification
- Water Treatment
- Poultry Incubators/Watering Equipment
- Industrial Maintenance, Repair, and Operation
- Boiler Blow Down (2192 Only)




Solenoid Valves


3/8", 1/2" & 3/4"

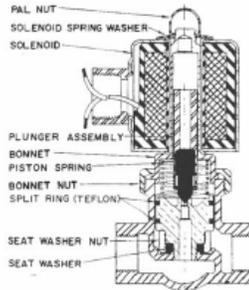

1" & 1-1/4"

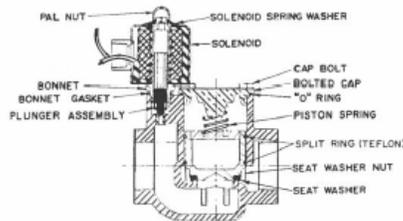

1-1/2" & 2"

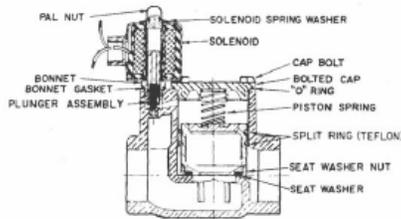

Solenoid Electrical Data:

Coil with 1/2" NPT Conduit outlet and 30" lead wires. Coils carry a NEMA 4 Rating.

Model	Volts	Max.Watts Holding	Amps Inrush	Amps Holding	Duty
2110	12VDC	24		2.00	Continuous
	24VDC	24		1.00	Continuous
	24VAC	14	1.85	1.07	Continuous
	120VAC	19	0.55	0.32	Continuous
	208VAC	18	0.31	0.18	Continuous
	240VAC	20	0.30	0.17	Continuous
2192	12VDC	24		2	Continuous
	24VDC	24		1	Continuous
	24VAC	12	1.68	0.97	Continuous
	120VAC	14	0.68	0.22	Continuous
	208VAC	12	0.19	0.11	Continuous
	240VAC	12	0.17	0.1	Continuous