






**PRODUCT SPECIFICATIONS**

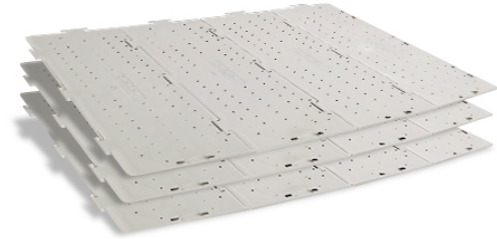

<b>MODULE SIZE</b>	12 in L x 4 in W x .75 in H (30.48 cm x 10.16 cm x 1.91 cm)
<b>WEIGHT</b>	0.27 lbs (0.12 kg) 0.81 lbs/ft <sup>2</sup> (3.95 kg/m <sup>2</sup> )
<b>WEIGHT BEARING</b>	56 psi / 8,000 psf static load with a solid subsurface
<b>MATERIAL</b>	High-impact Polypropylene Copolymer with added UV Inhibitors
<b>EXPANSION JOINT SIZE</b>	 <p><b>USABLE SURFACE AREA</b> Closed 12 in L x 4 in W x <sup>3</sup>/<sub>4</sub> in H (30.48 cm L x 10.16 cm W x 1.9 cm H) Opened (maximum) 12 in L x 5 in W x <sup>3</sup>/<sub>4</sub> in H (30.48 cm L x 12.7 cm W x 1.9 cm H)</p> <p><b>WEIGHT</b> .27 lbs (.12 kg)</p> <p><b>EXPANSION</b> 1 in (2.5 cm)</p>
<b>EDGING SIZE</b>	 <p>12 in L x 3 in W x <sup>3</sup>/<sub>4</sub> in H – tapered (30.48 cm L x 7.62 cm W x 1.9 cm H)</p>
<b>FIRE RATING</b>	UL 94HB

3EED 200707 ©2020 Signature Systems



US +1 972-332-4346 | UK +44 1642 744950  
signature-systems.com