



FiberTite-XT with DensDeck® StormX™ Prime Roof Board


WILL YOUR ROOF WITHSTAND VERY SEVERE HAIL?

Protect your building with the best.

Commercial roofing's toughest hail rating is **no match for FiberTite... again.** Passing **Very Severe Hail (VSH)** for a second time - now with **DensDeck StormX Prime Roof Board** - architects, specifiers, and owners can now select a roof system that provides **operational security and peace of mind** in the hail-belt.

- Time-tested technology
- Superior UV, puncture and chemical resistance
- Outperforms in the harshest environments

For unmatched protection proven years beyond the competition, trust FiberTite!

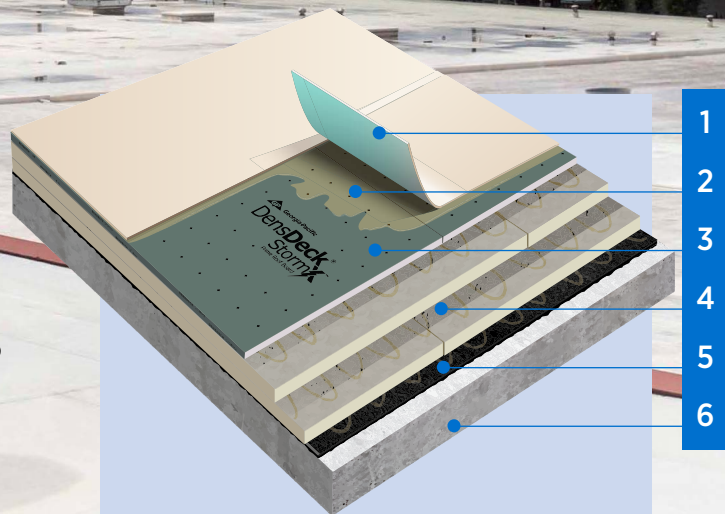

1. Membrane - FiberTite-XT
2. Adhesive - FTR-190e
3. Coverboard - DensDeck® StormX™ Prime
4. Approved FTR-Value Insulation, Mechanically Attached or Adhered
5. Optional - Approved FTR Vapor Barrier
6. Deck - Steel or Structural Concrete




**FiberTite is the Only
KEE manufacturer with
FM Global® VSH accreditation**

WHAT DOES FM GLOBAL APPROVAL & 40+ YEARS OF PERFORMANCE MEAN?

UNMATCHED PROTECTION. Protecting a building's ability to remain fully operational despite severe weather events, environmental contamination and man-made wear and tear is all about resiliency. When it comes to peace of mind that your investment is protected, **FiberTite's** history of performance combined with **DensDeck® StormX™ Prime Roof Board** provides the operational security that you have come to expect with **FiberTite** - while also meeting the new and most strict hail classification of VSH.

This **Very Severe Hail (VSH) approval by FM Global** is in conjunction with our adhered **FiberTite-XT** smooth back membrane. This solution is ideal for building owners of critical facilities solution seeking peace of mind from extreme hail impact, chemical resistance or anything the harshest roof-top environments can experience.

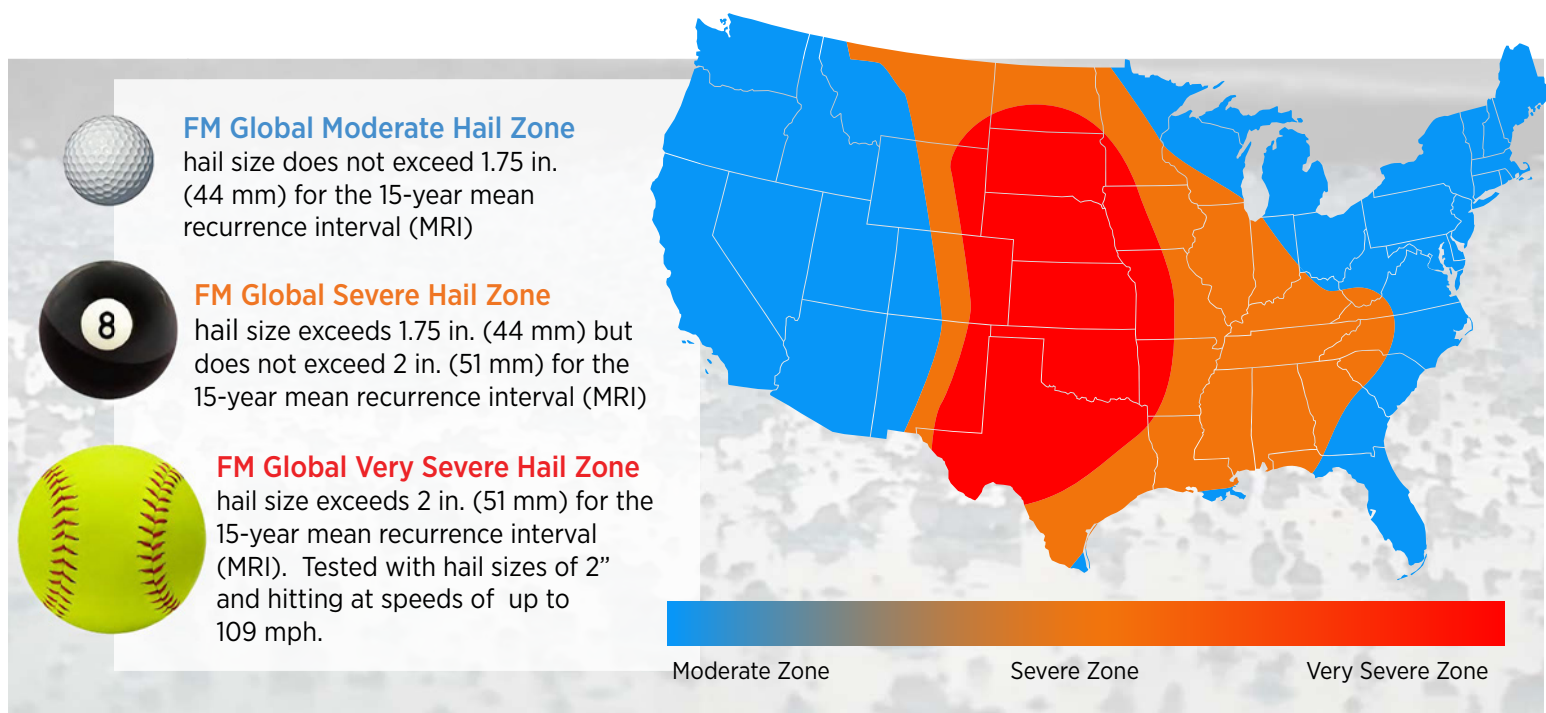

172 total FM RoofNav® listings




31 over steel deck, max uplift FM I-210
118 over concrete, max uplift FM I-840
23 over existing roof, max uplift FM I-465

FiberTite.com / VSH

A formula you can trust and a difference you can see

FiberTite boasts the roofing industry's **toughest base fabric** and the highest ELVALOY™ Ketone Ethylene Ester (KEE) content, allowing our roofing membranes to maintain excellent flexibility, as well as chemical and UV resistance.

Learn more at [FiberTite.com/KEEmembranes](https://www.FiberTite.com/KEEmembranes)

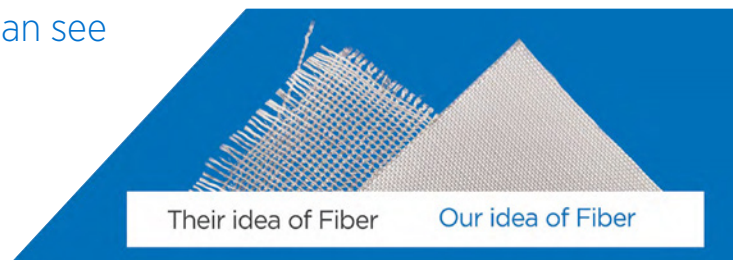

Seaman Corporation

1000 Venture Blvd. • Wooster, OH 44691 | 330.262.1111 | www.SeamanCorp.com | www.FiberTite.com

Copyright © 2020 Seaman Corporation

FiberTite® is a product and registered trade name of Seaman Corporation
StormX™ is a trademark, and DensDeck® is a registered trademark of Georgia-Pacific Gypsum LLC. DensDeck® is manufactured by Georgia-Pacific Gypsum LLC
FM Global® and RoofNav® are registered trademarks of FM Approvals LLC
ELVALOY™ is a trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow