

FROMMM

PACKAGING
SYSTEMS
CANADA



D53-PLT2 & D53-HE2

PALLET STRAPPING MACHINE

PALLET STRAPPING MACHINE

D-53 PLT2

■ Versatile Tension Capability

Manual Tension or Automatic Tension are available by means of a simple selector switch.

< Manual Tension Mode >

The strap tension can be controlled manually via the Operation Bar, allowing edge protection to be secured to the pallet prior to strap completion.

< Auto Tension Mode >

Strap tension is applied automatically at a preselected level.

■ Simple Operation


Operator friendly! Only the use of the Operation Bar (Manual Tension) and the Start Switch are needed for complete strap operation.

■ 4-Way Pallet Entry

The bayonet height can be adjusted (35 mm, 22.5 mm, 10 mm/ 1.4 in. 0.9 in. 0.4 in.) by a simple lever. Allows cross strapping through various sized pallet openings.

■ Lower Sealing for Small Pallet

Sealing Point is only 340 mm (14 in.) from the floor. Small height pallets can now be strapped easily.

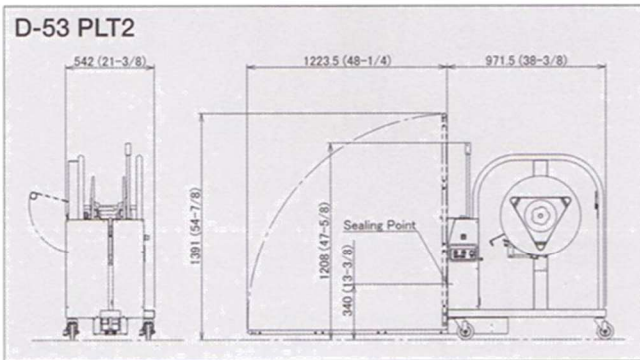

D-53 HE2

■ Easy Height Adjustment


Strapping height is quickly adjusted through the easily operated counterbalance that moves smoothly and effortlessly to the desired strap location.

■ Simple Operation

The innovative pendant switch allows operation of the machine from either side of the load while enabling the operator to control the feeding, tensioning, and sealing of the strap with one hand.

Operator control makes positioning of the strap and/or the placement of corner protection an easy task.

Battery operated type is also available for both models.

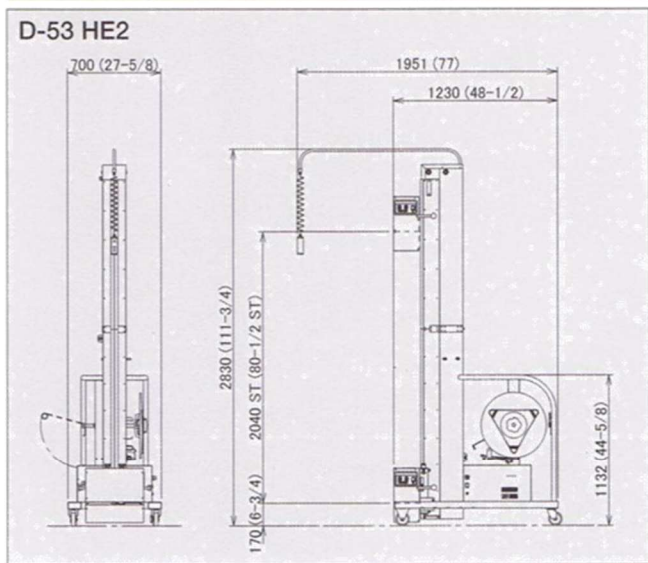

■ Standard Specifications

| | D-53 PLT2 | | D-53 HE2 | |
|-----------------------|---|-------------------------------|------------------------------|---------------|
| Dimensions | width | 1000 – 2195 (39-1/2 – 86-1/2) | width | 1230 (48-1/2) |
| | height | 1208 – 1391 (47-3/8 – 54-7/8) | height | 2380 (94) |
| | depth | 542 (21-3/8) | depth | 700 (27-5/8) |
| Machine Weight | approx 90 kg (198 lbs) | | approx 170 kg (374 lbs) | |
| Arch Height | 10, 22.5, 35 (3/8, 7/8, 13/8) | | — | |
| Package Size (Height) | 380 (15) – free | | 450 – 1800 (17-3/4 – 70-3/4) | |
| Strap Width | 12 (1/2) | | | |
| Strap tension | 90 – 690N (9 – 70 kgf) (20 – 156 lbs) | | | |
| Sealing Method | heat seal | | | |
| Power Supply | 100, 110, 120, 200, 220, 230, 240V single phase 50 / 60Hz 0.4kw | | | |

DISTRIBUTED BY:

FROMM PACKAGING SYSTEMS CANADA

676 Monarch Ave. Unit 6 Ajax, ON L1S 4S2

Email: sales@frommpackaging.ca

Tel: 905-428-3444

www.frommpackaging.ca



SCAN ME