



EXCEL FLUID GROUP, LLC

Aluminum NoVault™ Pump Station: EX-ALNV3

Revision #004 / Sept. 2021

Factory Assembled Submersible Pump Station

Technical Specifications:

6 ft. x 5 ft. Enclosure

Internal Structure is Fabricated of 6061-T6 Aluminum Tubing and the Exterior Sheet is Fabricated to a Mill Finish ASTM 3003 with 6061-T6 Aluminum, Minimum Sheet Thickness of 0.80. Station Baseplate is ASTM 6061-T6 Aluminum Plate and includes reinforced pipe header support plate.

Enclosure Access Doors

Aluminum Lockable Gull Wing Access Doors with Locking Gas Shocks and Stainless-Steel Hinges; includes Bug-Free Ventilation Covers.

Enclosure Hardware

Two (2) Heavy Duty 300 Series Stainless Steel Keyed Handle that operates 2 FMV#SS206 Approved Latches.

Enclosure Lighting

EX6 Six (6) High Power LED Waterproof Light Fixtures, Rigid Aluminum Housing, 12VDC Power Supply.

Enclosure Insulation

Dow Super Tuff-R Poly Coated Closed Cell Foam, Sidewall has a Minimum Rating of R6.5 and the Roof has a Minimum Rating of R12.5.

Enclosure Liner

Black "Rhino-Tuff" Spray Coating, Two-Component, 100% Solids Elastomeric Polyurethane/Polyurea Hybrid Lining.

Enclosure Ventilation

Wall Mount Electric Cooling Fan, 120 VAC, 230 CFM, Aluminum Frame, Thermostatically Controlled.

Enclosure Heating

Wall Mount Electric Radiant Heater, 120VAC, 1000 Watts, Thermostatically Controlled for Frost Protection.

Discharge Piping

4 in., 6 in., 8 in., or 10 in. Flanged Pipe and Fittings, Available in Ductile Iron, HDPE, Stainless-Steel or PVC.

Valves

- Two (2) Fig. 340-W Lever and Weight Swing Check Valves, Flanged, AWWA C508, Ductile Iron ASTM A536 Body, NSF-61 Epoxy Coated.
- Three (3) Fig. 601 Eccentric Plug Valves, Flanged, AWWA C504, Cast Iron A126 Class B Body, Rubber Coated Ductile Iron Plug, Manufacturer Standard Coating.

Emergency Bypass Connection

Aluminum Quick Disconnect Fitting with Aluminum Dust Cap includes Plug Valve and Pipe Fittings.

Electrical Plugs/Receptacles

Electrical Pin and Sleeve Quick Disconnect Power Connections, Type 4X, Water and Gas Tight Design.

Duplex NoVault Pump Station



Aluminum Enclosure




Cable/Wire Trough



ArcSentry™ Control Panel



Electrical Plugs and Receptacles

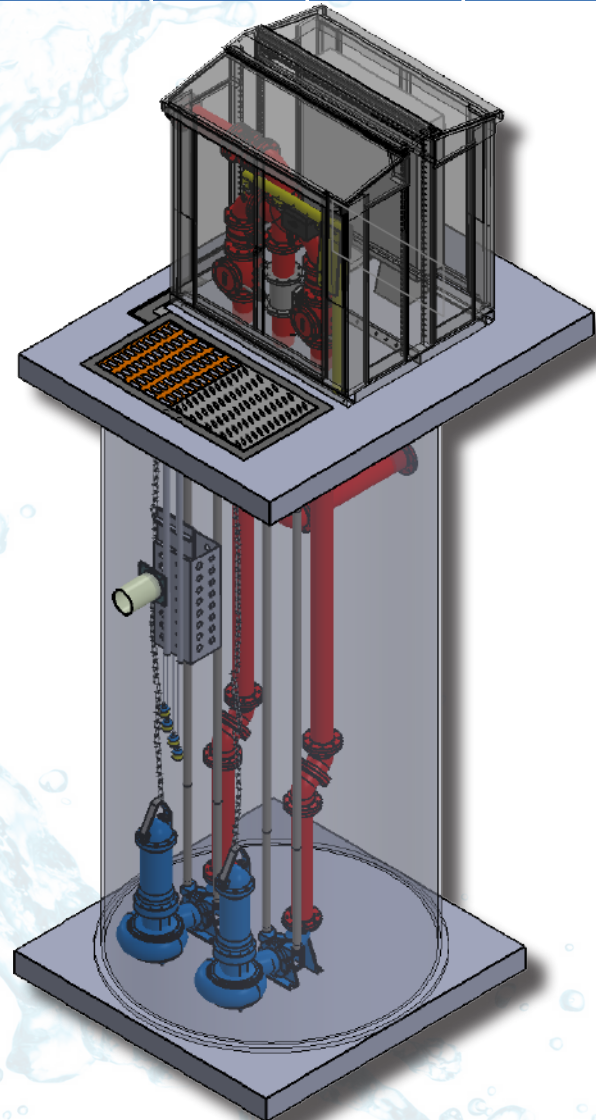

Excel Fluid Group, LLC • 5350 West 137th St. Brook Park, OH 44142 • sales@excelfluidgroup.com

www.excelfluidgroup.com • Phone: (800) 892-2009 • Fax: (216) 941-9916

Aluminum NoVault™ Pump Station: EX-ALNV3

Electrical Controls

"Arc-Sentry" Duplex Control Panel, NEMA 12, UL Listed Enclosure, Contains High Voltage Compartment with Electrically Interlocked Door and a Low Voltage Compartment with all Operator 120VAC Controls. Multiple Control Options Available Including VFDs, NEMA Starters, PUMP Vision PLC Control with HMI Screen, Standard Lights, Pushbuttons and Switches. Controls Primarily Designed to Reduce Arc-Flash Hazards for Operators.

Submersible Pumps

- **Non-Clog Pumps:** 4", 6", 8" or 10" Discharge, Range from 15 HP – 150 HP, 208-230/460 V, 3 Phase.
- **Chopper Pumps:** 4", 6", 8" or 10" Discharge, Range from 15 HP – 150 HP, 208-230/460 V, 3 Phase.

Wet Well Structure Options

- **Pre-Cast Concrete:** Wet Well and Flat Top, 96" Minimum Diameter, Depth Sized per Application.
- **Polymer Concrete:** Wet Well and Flat Top, 96" Minimum Diameter, Depth Sized per Application.
- **High Density Polyethylene (HDPE):** Wet Well, 96" Minimum Diameter, Depth Sized per Application.
- **Fiberglass Reinforced:** Wet Well, 96" Minimum Diameter, Depth Sized per Application.

Polymer Concrete Flattop with Access Hatch and Safety Gate

- Castinite Polymer Concrete Flattop, 18,000 PSI Compressive Strength, 90%-94% High Purity Quartz Aggregate with High Strength Resin Epoxy, Minimum 96"x96" Square.
- Aluminum Channel Frame Access Cover with Lockable Dual Hatch Doors, Stainless Steel Hinges and Hardware. Includes Safety Gate, Aluminum "I" Bar Construction, Safety Orange Powder-Coated Finish, 316SS Hardware, Tamper Proof SS Hinge Bolts, 300# PSF Load Rated, With Locking Capability.
- Cable Tray 6"x36", Aluminum Slip-Resistant Removable Cover, Designed to House All Power Cables, Level Control Cables and Serve as The Wet Well Vent.


Guide Rail Assembly

- Two (2) or Three (3) Cast Iron Base Elbow Stationary Fittings, Bolted to Wet Well Floor with Stainless Steel Studs. Size Range From 4" (In.) – 10" (In.) Flanged Base Elbow Fittings.
- Two (2) or Three (3) Cast Iron Upper Guide Rail Brackets, Mounted on Wet Well Access Cover Frame.
- 2" or 3" 304 Stainless Steel Guide Rails.
- Two (2) or Three (3) Cast Iron Moveable Fittings, Mounted on Pump Discharges, Allow Pumps to be Removed Without Entering Wet Well.
- Includes Intermediate Guide Rail Brackets if Wet Well Depth is Greater Than 20' (Ft.) Deep.

Level Controls


Standard Float Switch Level Controls or Primary Level Transducer with Back-Up Float Switch Level Controls.

Pipe Tree View

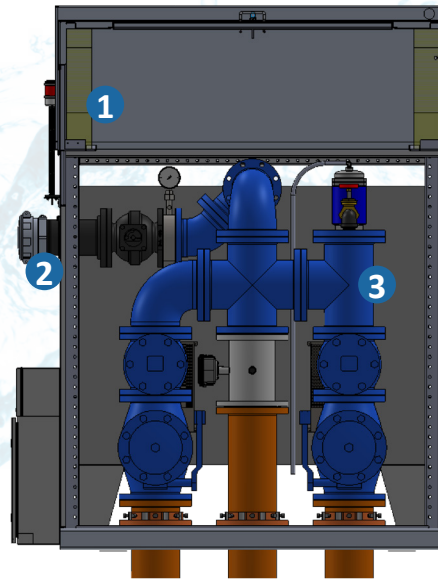

- 1) Gull-Wing Doors
- 2) Bypass Coupling
- 3) Pipe Tree with Check Valves

Controls View

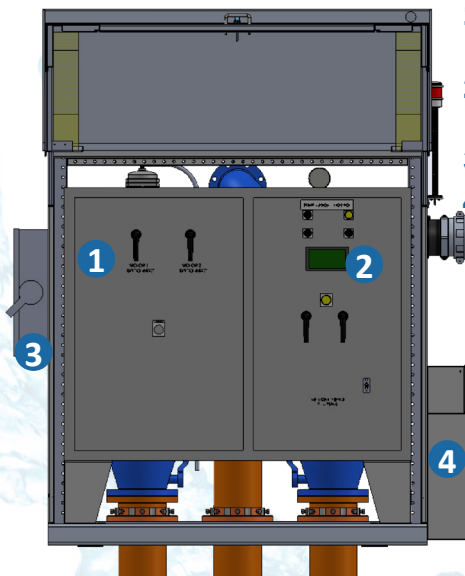

- 1) High Voltage Control Panel
- 2) Low Voltage Control Panel + SCADA
- 3) Power Service Entry
- 4) Cord Cabinet



EXCEL FLUID GROUP, LLC

Aluminum NoVault™

Pump Station: EX-ALNV3

Revision #004 / Sept. 2021

Warranty

Two (2) Years from Date of Shipment; Designed to Resist UV Damage, Covers Corrosion from Moisture, Soil, Septic Fluid and Gas, or Structural Failures Occurring in Normal Service, When Station is Installed in Accordance with Manufacturer's Recommendations.

Options:

Stowaway Crane

Steel Construction, 30 ft. of 1/4" Stainless Steel Cable with Galvanized Safety Hook, Adjustable Boom, 120VAC Electric Winch with Remote Hand-Held Pendulum and Manual Hand Crank, Rated for 800 Lbs

Flow Meter

Electromagnetic Flow Sensor, Carbon Steel Flanges, Ebonite Hard Rubber Liner, Hastelloy Electrode, Remote Transmitter with Display.

Inlet Drop Bowl

Reliner Inside Drop System, Polyester Resin Drop Bowl with SCH80 PVC Drop Pipe, Includes Flexible External Sleeve.

Trash Basket

Aluminum Construction, Perforated Screening Style, With Aluminum Guide Rail System and Stainless-Steel Chain.

Service Power Pedestal

Weather Resistant Electrical Enclosure that includes a Utility Pull Section with Optional Meter Socket and End User Section for Disconnect and Transfer Switch. NEMA 3R Steel Construction, with Lockable Access Doors and Compact Footprint.

Meter Base

Single Position Sockets: 100/200 Amp, Ringless, 4 Terminals.

Automatic or Manual Transfer Switch

Interlocked Main Double Circuit Breaker, Outdoor General Purpose, NEMA 4X, Stainless Steel Enclosure, UL98 Listed.

Generator Receptacle

Outdoor General Purpose, Load Rated.

Stand-By Power Systems

Natural Gas or Diesel Generators Available, Sized Per Application.

SCADA Compatibility

Ethernet Module for Control and Status to External System.

Aesthetics

Vinyl Exterior Finish with Red Brick Look, Tan Brick Look, Tan Rustic Stone Look or Green Pine Tree Look; Resistant to Mild Alkalis, Mild Acids and Temperatures from -65° to 225° F.

FOG/Odor Control System


Wet Well Wizard Aeration System with 1.5HP Regenerative Blower, HDPE 3" Tube with HDPE Cleaving Disks, 10lb. Stainless-Steel Support Base, PVC Air Hose with Connection Hardware.

Service Power Pedestal



- Electric Meter
- Utility connection side separate from customer connection side
- Main Service Disconnect
- Space to house ATS or MTS

Triplex Pump Configuration

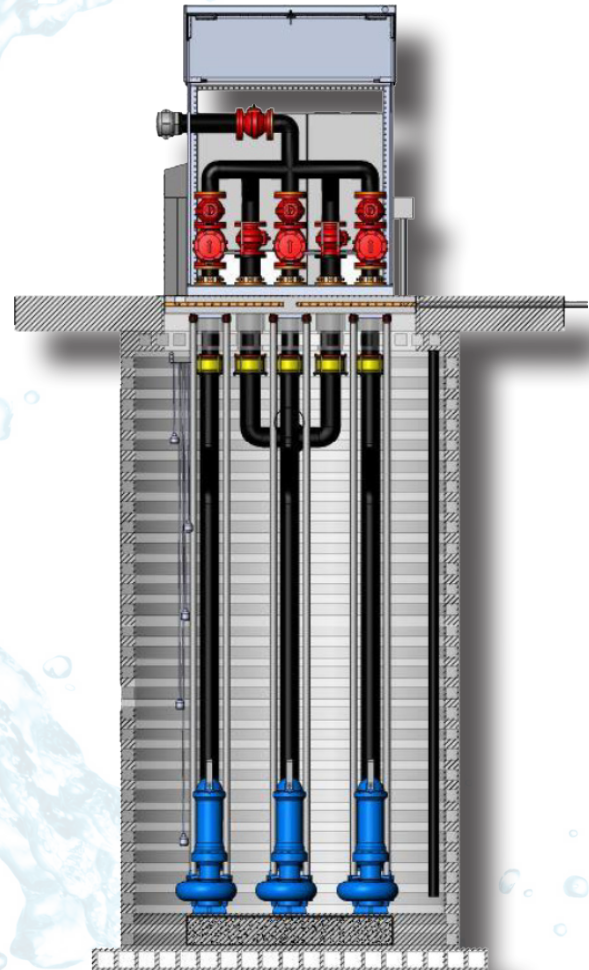

Excel Fluid Group, LLC • 5350 West 137th St. Brook Park, OH 44142 • sales@excelfluidgroup.com

www.excelfluidgroup.com • Phone: (800) 892-2009 • Fax: (216) 941-9916