


## 3nethra NBO

Digital Wide-field Imaging System



# SnethraHigh-resolution ImagingNCOwith Greater Field of View

The 3nethra neo is a compact, portable, and easy-to-use mydriatic wide-field digital imaging system used for the photo documentation of ocular diseases that manifest in infant eyes. The ergonomically designed, lightweight handpiece allows for single-handed operation, and captures 120-degree high-resolution images of the posterior and anterior segments of the eye. The device acquires only digital photographs of the eye and does not provide any analysis or diagnosis. The contact device is easily operated by qualified clinicians and can be deployed in versatile clinical environments such as hospitals, operating rooms, and Neonatal Intensive Care Units (NICU).

## Salient Features



Integrated provision for historical data



Intuitive controls and workflow



Compact and ergonomic design

Lightweight and easy to use

### Digital Health Platform

Cloud-based platform for secure electronic uploading of high-resolution digital images by operators and remote review by qualified clinicians.

Digital Health Platform availability is subject to local regulatory requirements/infrastructure and therefore varies from country to country.

## **Innovation in Design**



Unique built-in compact warm white LED-based illumination system



Complex and compact optomechanics to make the probe lightweight




Innovative focusing system that enables noiseless operation



Wide-field imaging at 120 degrees *Lightweight, pen-holder grasp handpiece for single-handed operation* 

## **Delivers Objective Evidence**

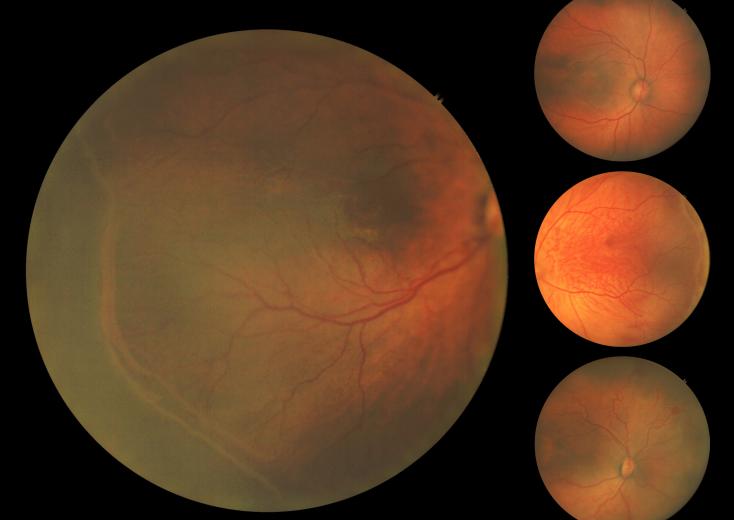

#### 120-degree FOV

Photo-documentation of visual health for medico-legal purposes

Enhances consultation, improving communication with patients


Deoro

Photographs captured by 3nethra neo do not provide any pathological analysis or diagnosis for treatment. The device assists clinicians in the evaluation, diagnosis, and documentation of visual health.

## **Review Software**




This convenient and full-screen view of the fundus images allows for easier comparison between images taken during different visits. This enables clinicians to evaluate the ocular condition's progression or regression faster.

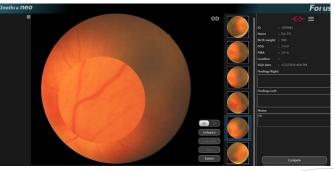

The magnifier option aids in better analysis of the formation and tortuosity of blood vessels.

## **Report Generation**

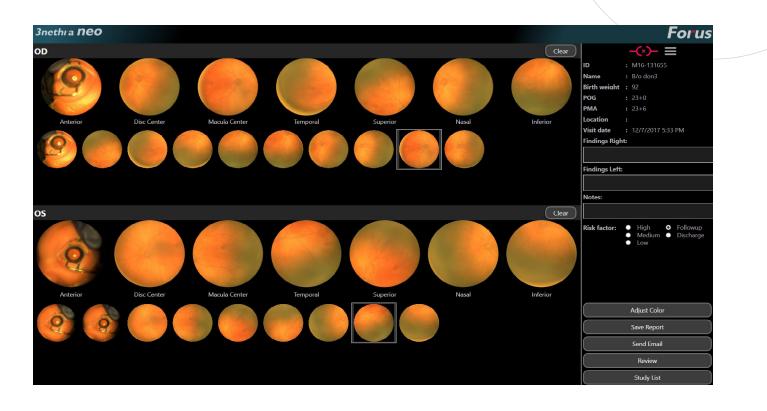

The report provides the photo-documentation of ocular conditions along with the findings for each eye to indicate a further course of action. The automatic segmentation of the images to the specific image fields in the report allows the variability of the images to be characterized separately for each eye. The review software enables sharing of the report through email.

## The Global Need for Pediatric Imaging

During the course of their intensive neonatal care, 37–54% of preterm babies contract a potentially blinding eye disorder known as Retinopathy of Prematurity (ROP). Unless early intervention is carried out, **7–15%** of these babies are at risk of going blind.

> 130 m\* babies are born each year

\*UNICEF

Approx 15 m are born preterm Of these, **>3.5 m preterm births** are recorded in India alone

Further, retinoblastoma is the most frequent neoplasm of the eye, accounting for 3% of all childhood malignancies. Globally, nearly 1 in 15,000 children develop retinoblastoma and 8,600–9,000 children are newly affected each year.\*\*

The need of the hour is an affordable, wide-field imaging solution to screen, evaluate, and photo-document pediatric ocular diseases.

\*\*wehope.org

## **Product Specifications**

Parameters	Values
Image Resolution	2048 X 2048, 24-bit colors
Minimum Pupil Diameter	4 mm
FOV	120 degrees, when measured from the center of the eye
Adjustments	Intensity, Gain, Balance, Brightness, Contrast, Gamma, and Focus
Imaging	Still images and burst mode images
Compatability	DICOM Export, Telemedicine, USB 3.0
Weight of Handheld Unit	340g (720g with cable)
Dimensions of Handheld Unit	210 (L) X 70 (W) X 60 (H) mm
Operating Environment	Temperature: 22-26°C Humidity: 30-70% Atmospheric pressure: 70-106 kPa Altitude: 0-2000 meters AC 100-240 V, 50/60 Hz (for DC power adapter 5V/4A)
Minimum System Requirements	Intel i5 or better, OS Windows 10 (64-bit) and Windows 10 (64-bit) Pro, with 8 GB RAM, at least 500 GB HD, dedicated graphics card with 2 GB or more memory, at least two USB 3.0 ports, display capable of 1920 X 1080 resolution, 1.2 Mbps or faster internet connectivity. The computer must conform to IEC60950 Ed 2.0 or equivalent standard

This product is available for sale in Europe and Canada. This product is not available for sale in the US.



**Forus Health Pvt Ltd** #2234, 23<sup>rd</sup> Cross Banashankari, 2<sup>nd</sup> Stage Bangalore – 560 070, India India: +91 80 4162 4041 | 4162 4042 US: +1 510 488-6805 Email: askus@forushealth.com Web: www.forushealth.com **Forus Health Inc** 2950, Merced Street Suite 114, San Leandro CA – 94577-5635