


1-3/4" Round Corner Square Bar Torque Anchors™

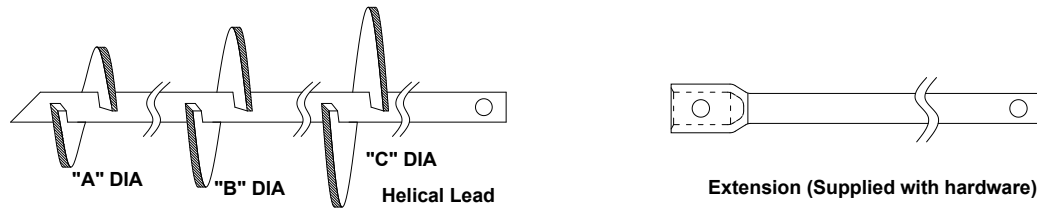

Standard ECP Torque Anchor™ Lead Configurations – 10,000 ft-lb*

Product Designation	Plate Diameter - inches			Plate Area sq. ft.	Length
	"A"	"B"	"C"		
HTAH-175-60 08	8	--	--	0.33	60"
TAF-175-60 10-12	10	12	--	1.29	60"
TAF-175-84 10-12-14	10	12	14	2.34	84"


Standard ECP Torque Anchor™ Extensions

Part Number			
36"	60"	84"	120"
TAE-175-36	TAE-175-60	TAE-175-84	TAE-175-120

Note: Products Listed Above Are Standard Items And Are Usually Available From Stock
 See page 11 – “How to Specify Special Order Torque Anchors™” for Specialized Configurations – Allow Extra Time For Processing.
 All Helical Plates Are Spaced At Three Times The Diameter Of The Preceding Plate
 Effective Length Of Extension Is 3" Less Than Overall Dimension Due to Coupling Overlap
 All Product Hot Dip Galvanized Per ASTM A123 Grade 100
 Shaft Weight per Foot – 10.4 lb/ft.
 “H” before part designation indicates helical plate thickness of 1/2 inch instead of standard 3/8”

2-1/4" Round Corner Square Bar Torque Anchors™

2-1/4" Square Bar Torque Anchor™ Leads – 23,000 ft-lb*

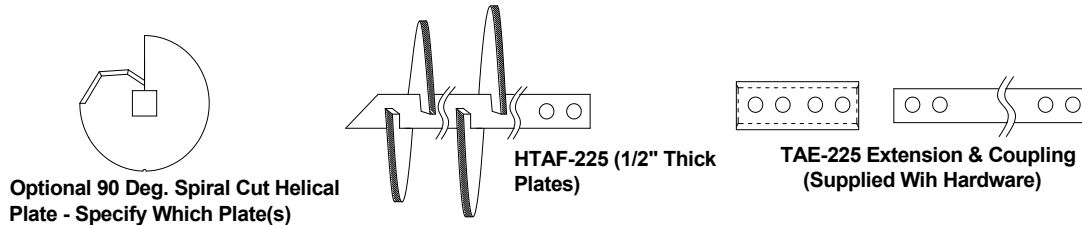

2-1/4" Square Bar Torque Anchor™ Extensions

Shaft Length	36"	60"	84"	120"
Part Number	TAE-225-36	TAE-225-60	TAE-225-84	TAE-225-120

Note: All 2-1/4" square bar products available as special order – Inquire for pricing and delivery
 See page 11 – “How to Specify Special Order Torque Anchors™” for information
 Helical plates are 1/2" thick and spaced at three times the diameter of the preceding plate.
 Extensions supplied with coupling and SAE J429 grade 8 bolts and nuts.
 Product hot dip galvanized per ASTM A123 grade 100.
 Shaft weight per foot – 17.2 lb.



* Please see “IMPORTANT NOTES” on Table 2