

## SPECIFICATIONS

Capacity Max	42 l/s
Head Max	50m
Nominal Duty	30 l/s @ 25 mtrs
Self priming lift	5 mtrs
Pump Speed	2400 rpm
Inlet/outlet (mm)	4" x 4" (100mm)

## RECOMMENDED ENGINES

Make	Model
Yanmar	3TNV82
Caterpillar	C1.1
Deutz	F2L 2011

## STANDARD MEASUREMENTS

Length (mm)	2050
Width (mm)	830
Height (mm)	1740
Dry Weight (kg) approx	540
Fuel Tank Capacity (L)	100

## STANDARD PACKAGE


- Camlock connections (STD)
- Lifting frame with lifting point
- Forklift accessible
- Fuel tank and bracket (options available)
- Large battery + battery tray
- STD SAE flywheel + coupling guard
- Lockable fuel cap
- Remko K21 controller
- Weather protection roof
- Engine protection STD

## OPTIONAL EXTRAS

- Remote start - stop
- Float or level control
- Battery isolator
- Lockable battery box
- Emergency stop
- Solar panel
- Flashing lights
- Fire extinguisher
- Skid base
- Trailer mounted




\*RS150 model pictured

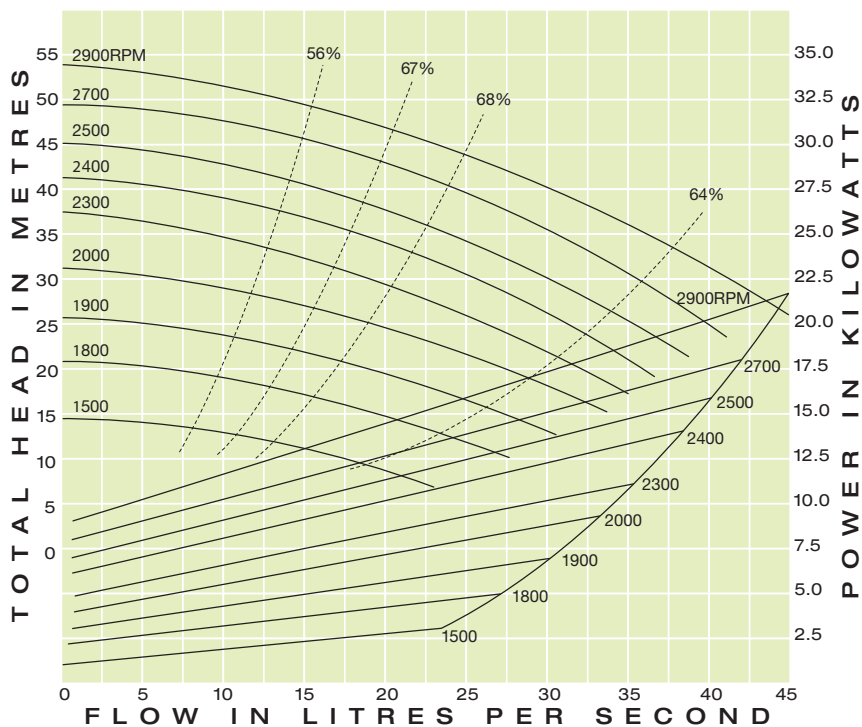**BUILT TO BE TOUGH**

**DESIGN:** Robust and heavy duty to meet the demands of the construction, agriculture, mining and rental industries.

**EFFICIENCIES:** Pump and motor efficiencies up to 80% which provides faster and more efficient pumping, resulting in savings to the user

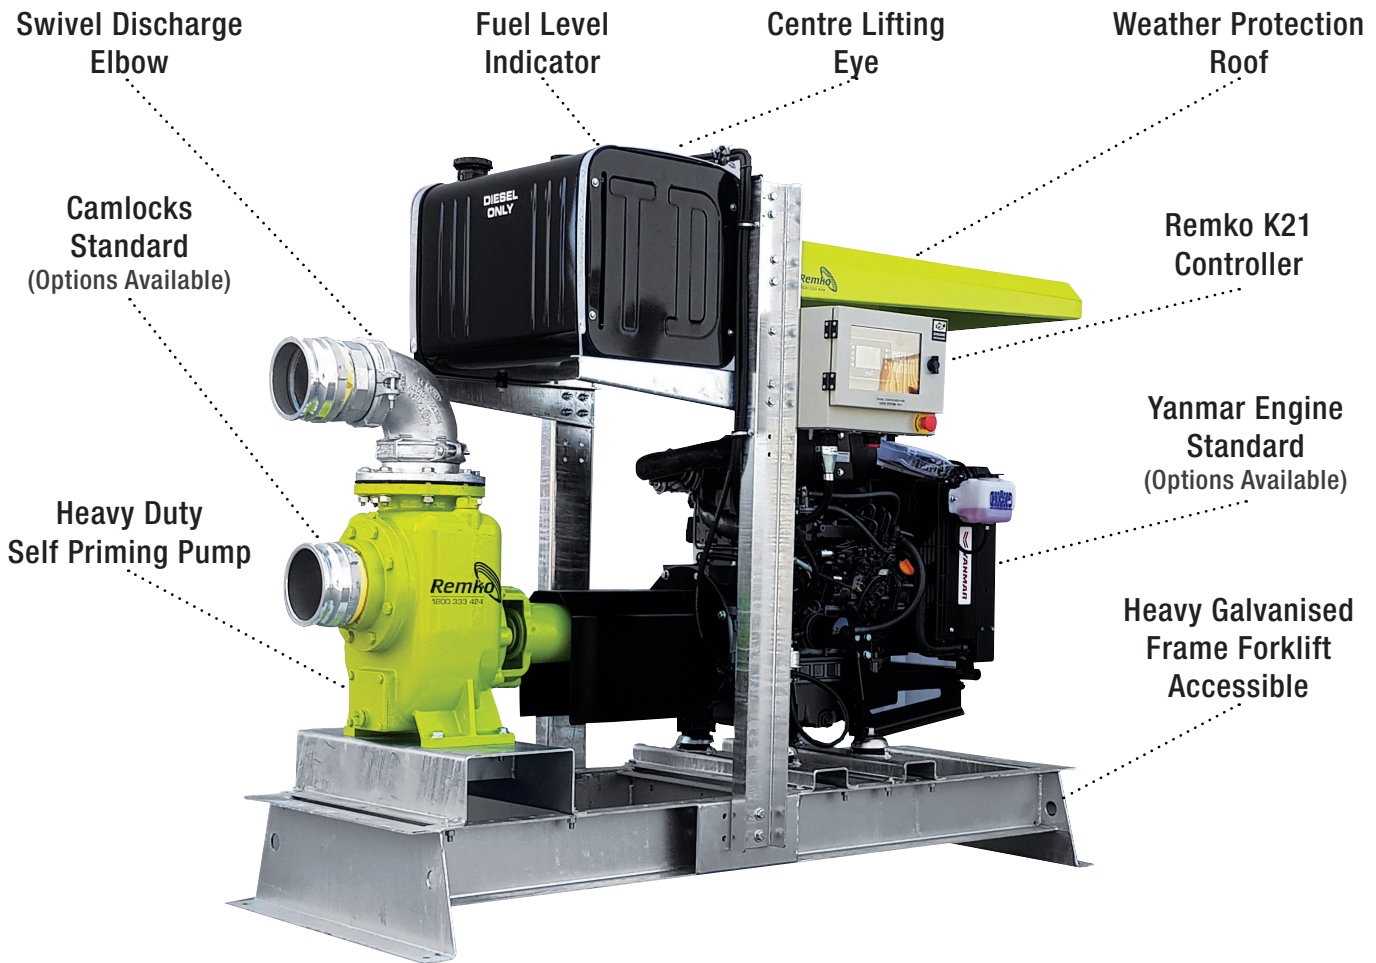

## FEATURES & BENEFITS

- Complete Turn Key Package
- Galvanised Finish
- Centre Point Lift
- Forklift Accessible
- Built Tough
- Custom Build Available
- Various Pump/Motor Options



Remko irrigation pump packages are built to a high quality standard with affordability in mind

With the irrigation and civil market, there are multiple applications - We will help select the best pump, motor, and package combination to suit your specific applications

## REMKO K21 CONTROLLER



- Low Oil Pressure Shutdown
- High Coolant Temp Shutdown
- RPM Display (Overspeed Shutdown)
- 100 Hour Run Timer
- Engine Hour Meter
- Battery Voltage Monitor/Display
- Low Radiator Level Shutdown
- 4-20mA Pump Pressure