SPECIFICATIONS	
Capacity Max	130 l/s
Head Max	44m
Nominal Duty	115 l/s @ 15 mtrs
Self priming lift	5 mtrs
Pump Speed	2200 rpm
Inlet/outlet (mm)	8" x 8" (200mm)


RECOMMENDED ENGINES	
Make	Model
Yanmar	4TNV84T
Caterpillar	C2.2T
Deutz	F4L 2011

STANDARD MEASUREMENTS		
Length (mm)	2050	
Width (mm)	830	
Height (mm)	1740	
Dry Weight (kg) approx	720	
Fuel Tank Capacity (L)	100	

STAN	NDARD PACKAGE
•	Camlock connections (STD)
•	Lifting frame with lifting point
•	Forklift accessible
•	Fuel tank and bracket (options available)
•	Large battery + battery tray
•	STD SAE flywheel + coupling guard
•	Lockable fuel cap
•	Remko K21 controller
•	Weather protection roof
•	Engine protection STD

OPT	IONAL EXTRAS
•	Remote start - stop
•	Float or level control
•	Battery isolator
•	Lockable battery box
•	Emergency stop
•	Solar panel
•	Flashing lights
•	Fire extinguisher
•	Skid base
•	Trailer mounted



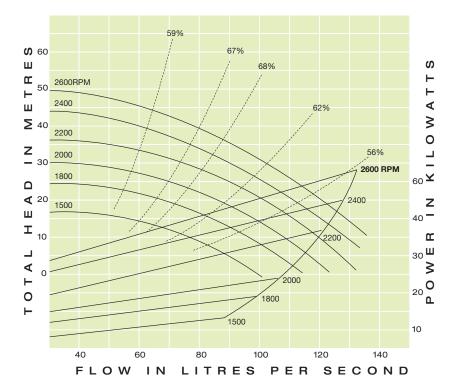


DESIGN: Robust and heavy duty to meet the demands of the construction, agriculture, mining and rental industries.

EFFICIENCIES: Pump and motor efficiencies up to 80% which provides faster and more efficient pumping, resulting in savings to the user

11/08/2020 9:24:06 AM

www.remko.com.au sales@allflo.com.au 1800 333 424

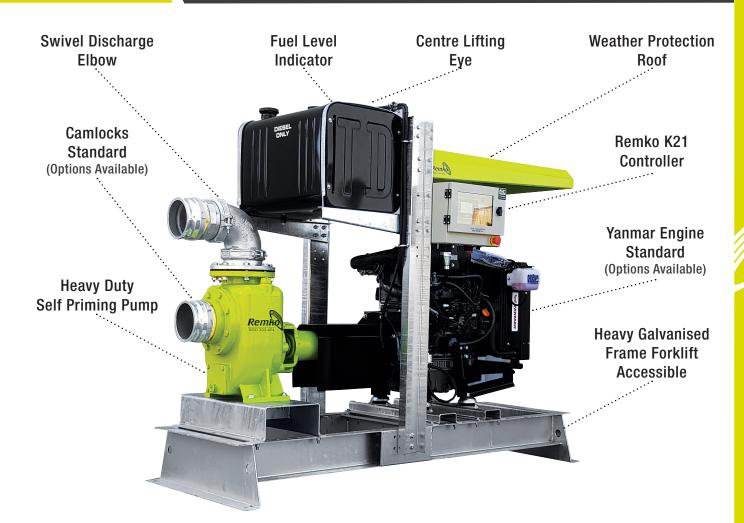

FEATURES & BENEFITS

- Complete Turn Key Package
- Galvanised Finish
- Centre Point Lift
- Forklift Accessible
- Built Tough
- Custom Build Available
- Various Pump/Motor Options

Remko irrigation pump packages are built to a high quality standard with affordability in mind

 \mathcal{M}_{ADE}

With the irrigation and civil market, there are multiple applications - We will help select the best pump, motor, and package combination to suit your specific applications

REMKO K21 CONTROLLER



- Low Oil Pressure Shutdown
- High Coolant Temp Shutdown
- RPM Display (Overspeed Shutdown)
- 100 Hour Run Timer
- Engine Hour Meter
- Battery Voltage Monitor/Display
- Low Radiator Level Shutdown
- 4-20mA Pump Pressure

www.remko.com.au remkosales@allflo.com.au 1800 333 424