

**REMKO RT050**  
**Heavy Duty Trash Pump**

**Remko** 

# REMKO RT050

Self priming with dependable performance makes RT Series Pumps a sensible solution for industry and municipalities requiring little maintenance, resulting in significant savings of time and money.

RT Series Pumps are ideally suited for industrial applications including: steel and paper mills, abattoirs, mines, food and chemical processing plants, construction industry, dewatering, trade waste and sewage handling.



The Remko RT050 Trash Pump

## PUMP SPECIFICATIONS

### SPECIFICATIONS

**Maximum outside dimensions.** 547mm x 309mm x 523mm (length x width x height)

**Weight.** 98 kilograms

**Impeller diameter.** 158.75 millimetres

**RPM.** From 1150 to 2900 RPM

**Solids.** 44 millimetres maximum

### SELF PRIMING SPECIFICATIONS

1150 RPM - 7.3 metres.


1450 RPM to 2900 RPM - 7.6 metres.

Confirm NPSH before using Curve.

Note: Specifications may change without notice

## PERFORMANCE CURVE

The Performance Curve indicates Total Metres Head vs Flow Rate

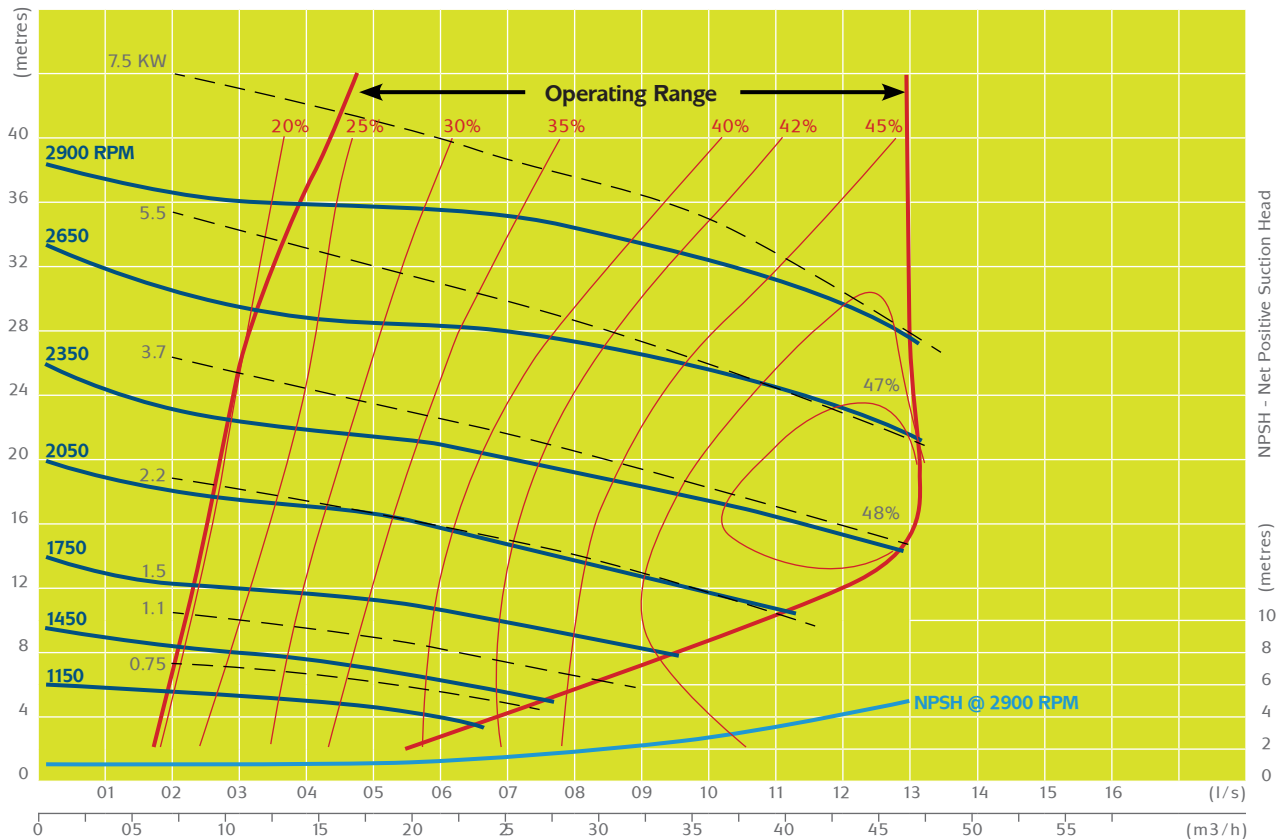

# OUTSIDE DIMENSIONS RT050

50mm ANSI 150

70.0

Pump dimensions may change  
without notice  
All dimensions in millimetres

50mm ANSI 150

Ø 14.0mm

523.0mm

281.0mm

308.3mm

235.0mm

Maintain distance of 420mm to  
remove the Rotating Assembly

318.0mm

101.6

Ø 38.1


151.5mm

54.0

163.2mm

275.0mm

547.0mm

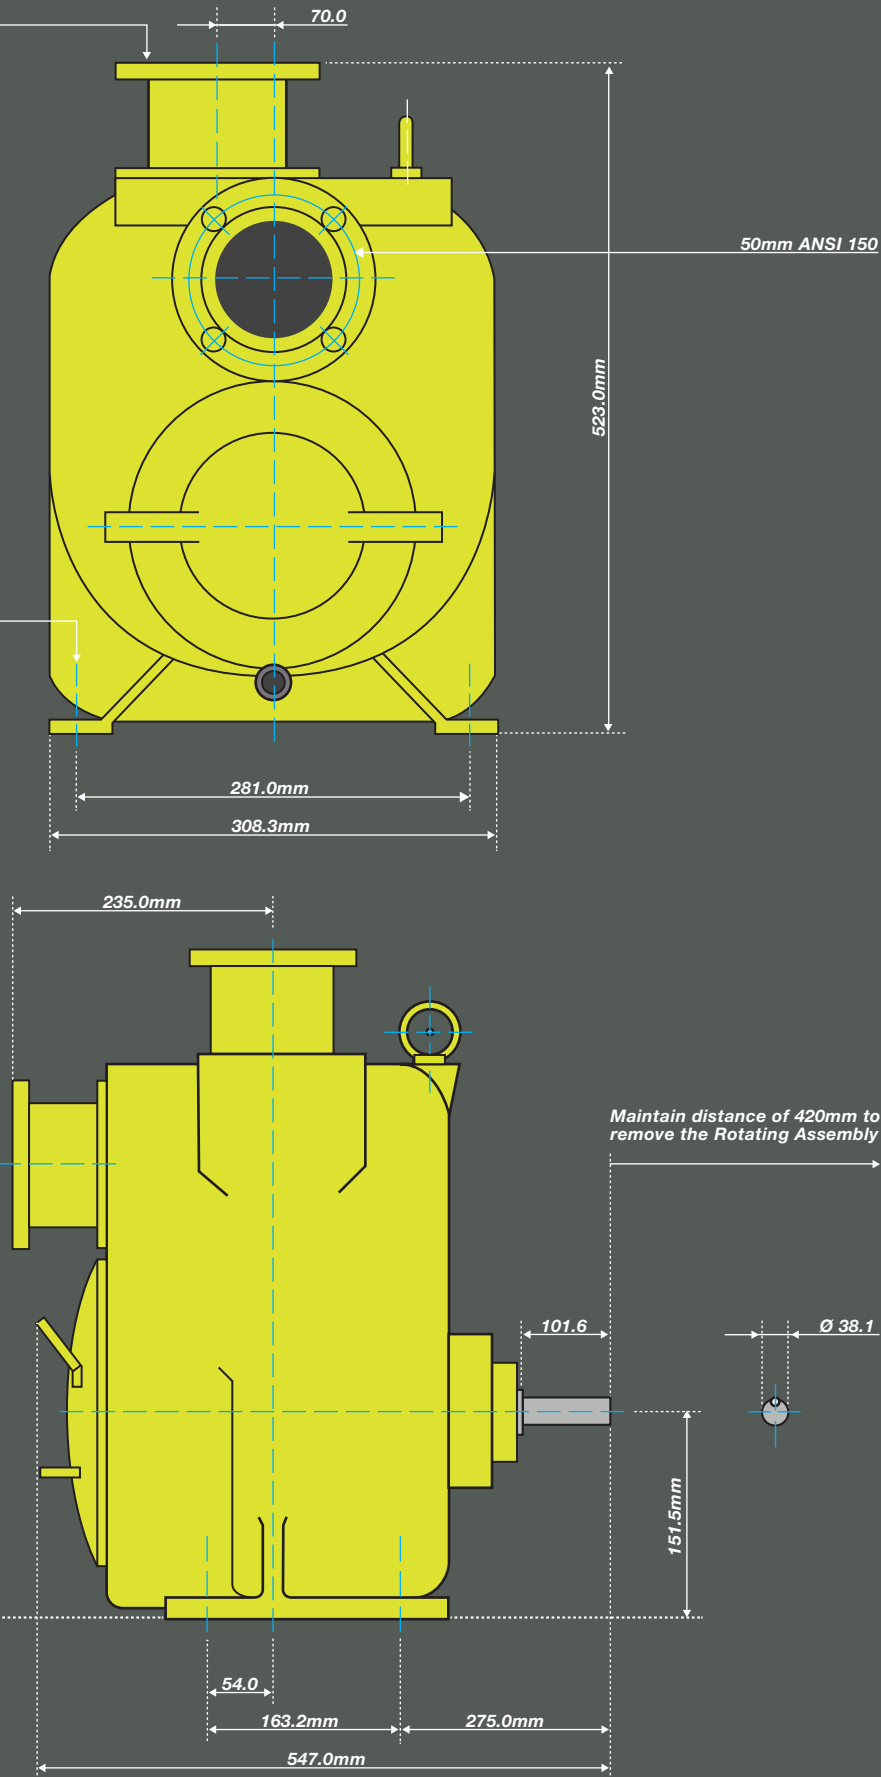



*Contact your local Remko Distributor*

*Remko 1800 333 424*