

REMKO RT080
Heavy Duty Trash Pump



REMKO RT080

Self priming with dependable performance makes RT Series Pumps a sensible solution for industry and municipalities requiring little maintenance, resulting in significant savings of time and money.

RT Series Pumps are ideally suited for industrial applications including: steel and paper mills, abattoirs, mines, food and chemical processing plants, construction industry, dewatering, trade waste and sewage handling.



The Remko RT080 Trash Pump

PUMP SPECIFICATIONS

SPECIFICATIONS

Maximum outside dimensions. 669mm x 432mm x 688mm (length x width x height)

Weight. 190 kilograms

Impeller diameter. 222.25 millimetres

RPM. From 650 to 2150 RPM

Solids. 63 millimetres maximum


SELF PRIMING SPECIFICATIONS

650 RPM - 1.5m. 750 RPM - 1.8m. 850 RPM - 2.4m. 950 RPM - 3.0m. 1050 RPM - 4.0m. 1150 RPM - 4.5m. 1250 RPM - 5.5m. 1350 RPM - 5.8m. 1450 to 1550 RPM - 6.4m. 1650 to 1750 RPM - 6.7m. 1850 to 2150 RPM - 7.6m. Confirm NPSH before using Curve.

Note: Specifications may change without notice

PERFORMANCE CURVE

The Performance Curve indicates Total Metres Head vs Flow Rate

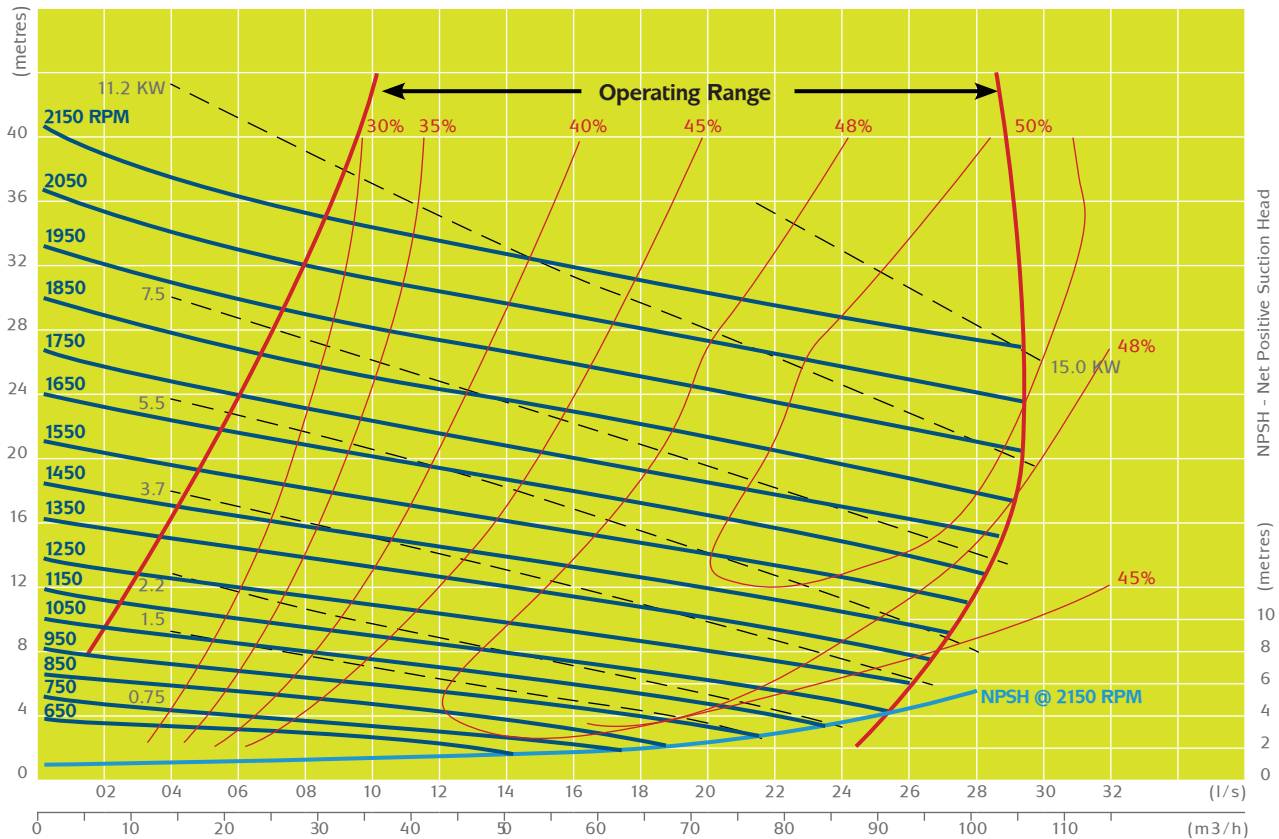

OUTSIDE DIMENSIONS RT080

80mm ANSI 150

70.0

Pump dimensions may change without notice
All dimensions in millimetres

80mm ANSI 150

687.4mm

Ø 17.5mm

393.7mm

431.8mm

293.7mm

Maintain distance of 420mm to remove the Rotating Assembly

431.8mm

101.6

Ø 38.1


190.5mm

76.2

228.6mm

284.2mm

668.3mm

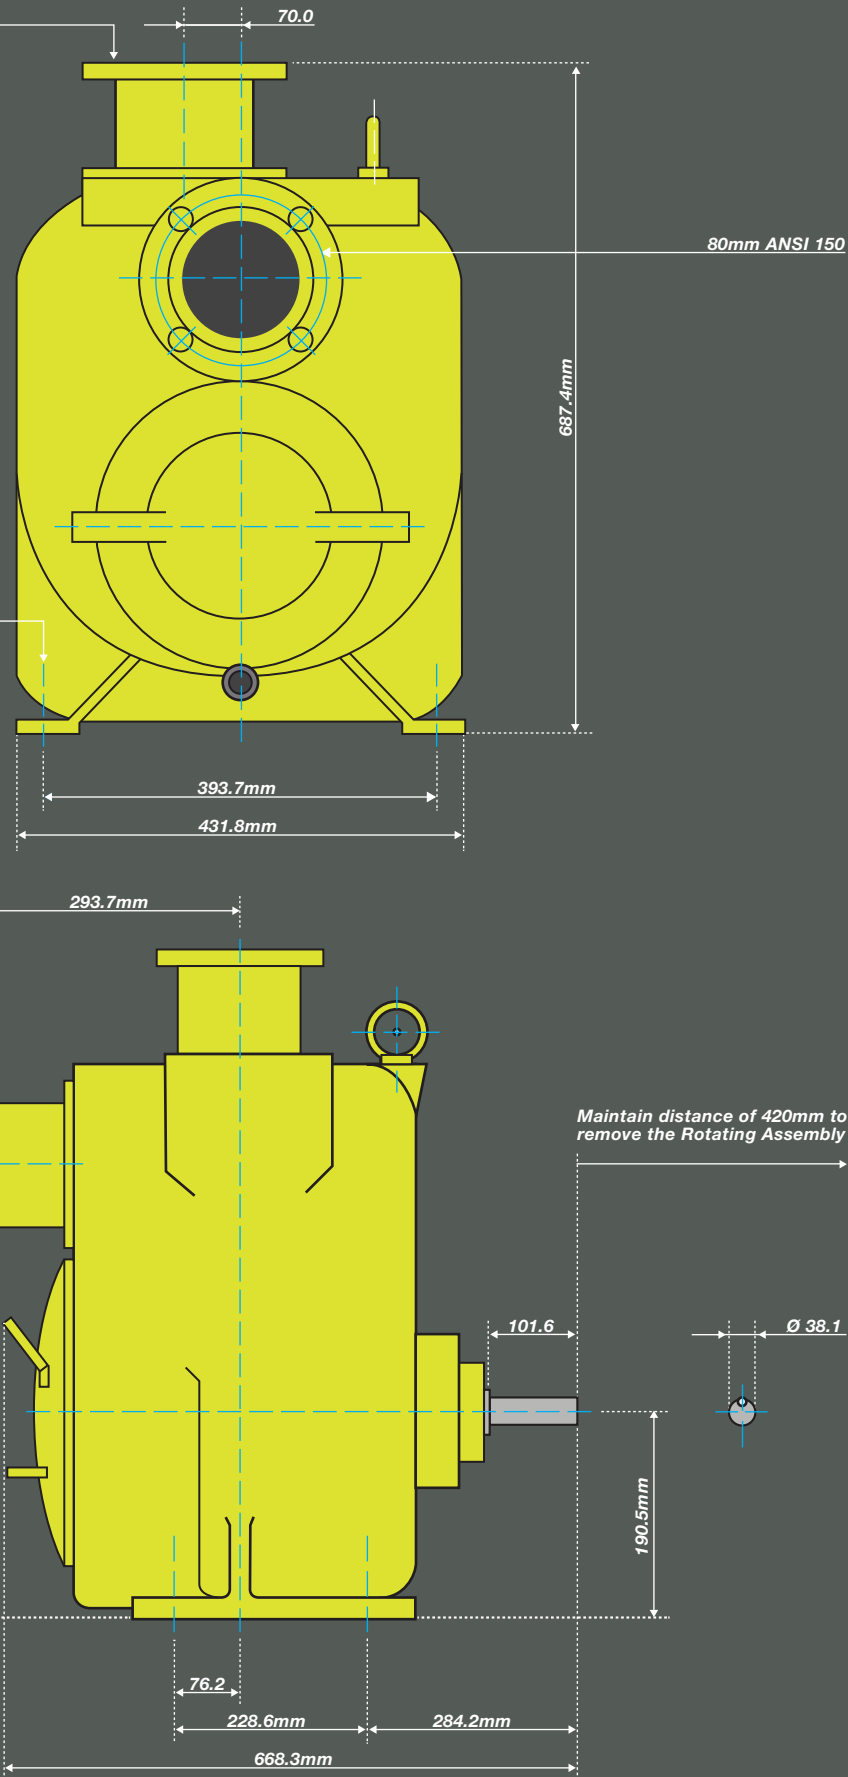



Contact your local Remko Distributor

Remko 1800 333 424