

REMKO RT150
Heavy Duty Trash Pump

Remko



REMKO RT150

Self priming with dependable performance makes RT Series Pumps a sensible solution for industry and municipalities requiring little maintenance, resulting in significant savings of time and money.

RT Series Pumps are ideally suited for industrial applications including: steel and paper mills, abattoirs, mines, food and chemical processing plants, construction industry, dewatering, trade waste and sewage handling.



The Remko RT150 Trash Pump

PUMP SPECIFICATIONS

SPECIFICATIONS

Maximum outside dimensions. 908mm x 585mm x 904mm (length x width x height)

Weight. 373 kilograms

Impeller diameter. 314.32 millimetres

RPM. From 650 to 1550 RPM

Solids. 76 millimetres maximum


SELF PRIMING SPECIFICATIONS

650 RPM - 2.4 metres. 750 RPM - 2.7 metres. 850 RPM - 3.6 metres. 950 RPM - 4.2 metres. 1050 RPM - 5.5 metres. 1150 RPM - 6.4 metres. 1250 RPM - 6.4 metres. 1350 RPM - 6.7 metres. 1450 RPM - 7.0 metres. 1550 RPM - 7.6 metres. Confirm NPSH before using Curve.

Note: Specifications may change without notice

PERFORMANCE CURVE

The Performance Curve indicates Total Metres Head vs Flow Rate

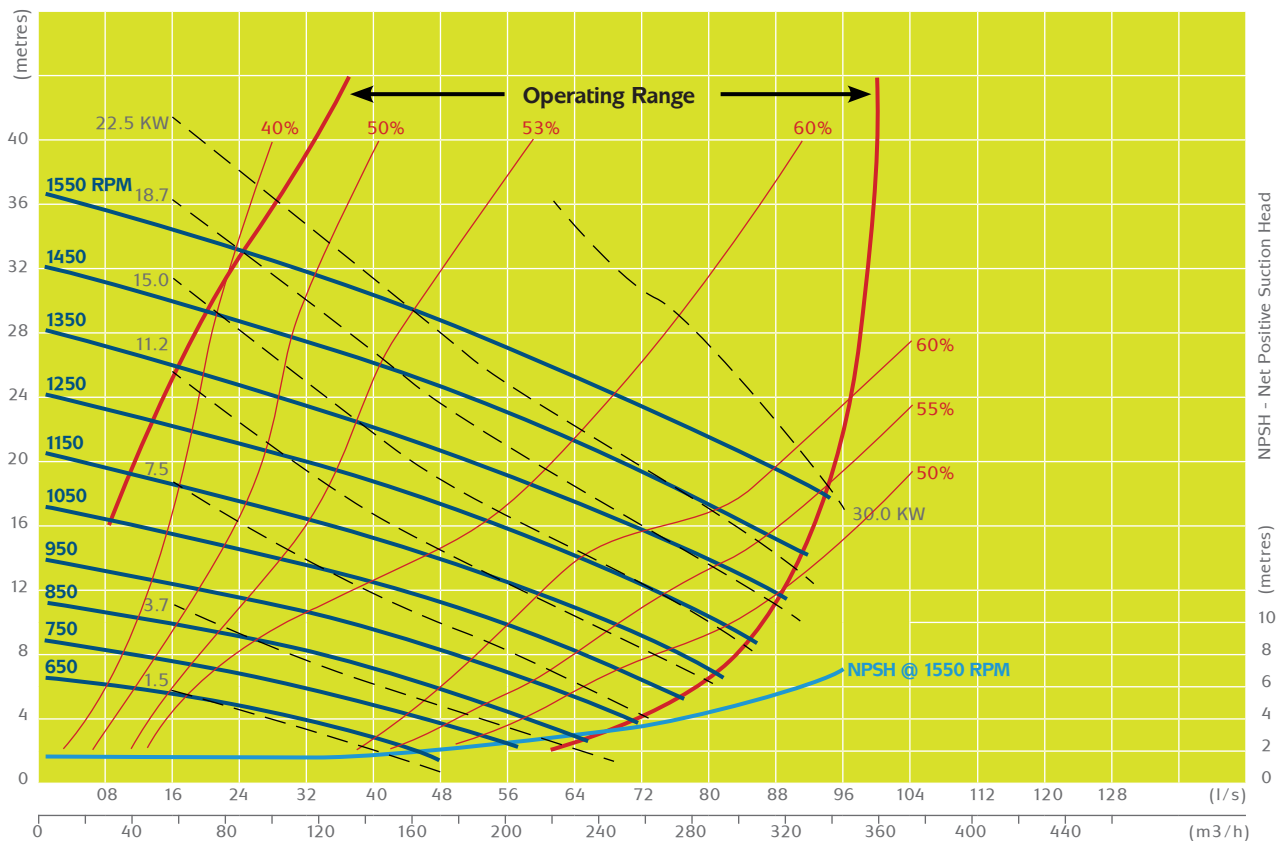

OUTSIDE DIMENSIONS RT150

150mm ANSI 150

70.0

Pump dimensions may change without notice
All dimensions in millimetres

150mm ANSI 150

904.0mm

Ø 17.5mm

527.0mm

584.2mm

411.0mm

Maintain distance of 480mm to remove the Rotating Assembly

572.0mm

127.0

Ø 38.1

257.2mm


77.8

279.4mm

300.0mm

844.6mm

908.0mm

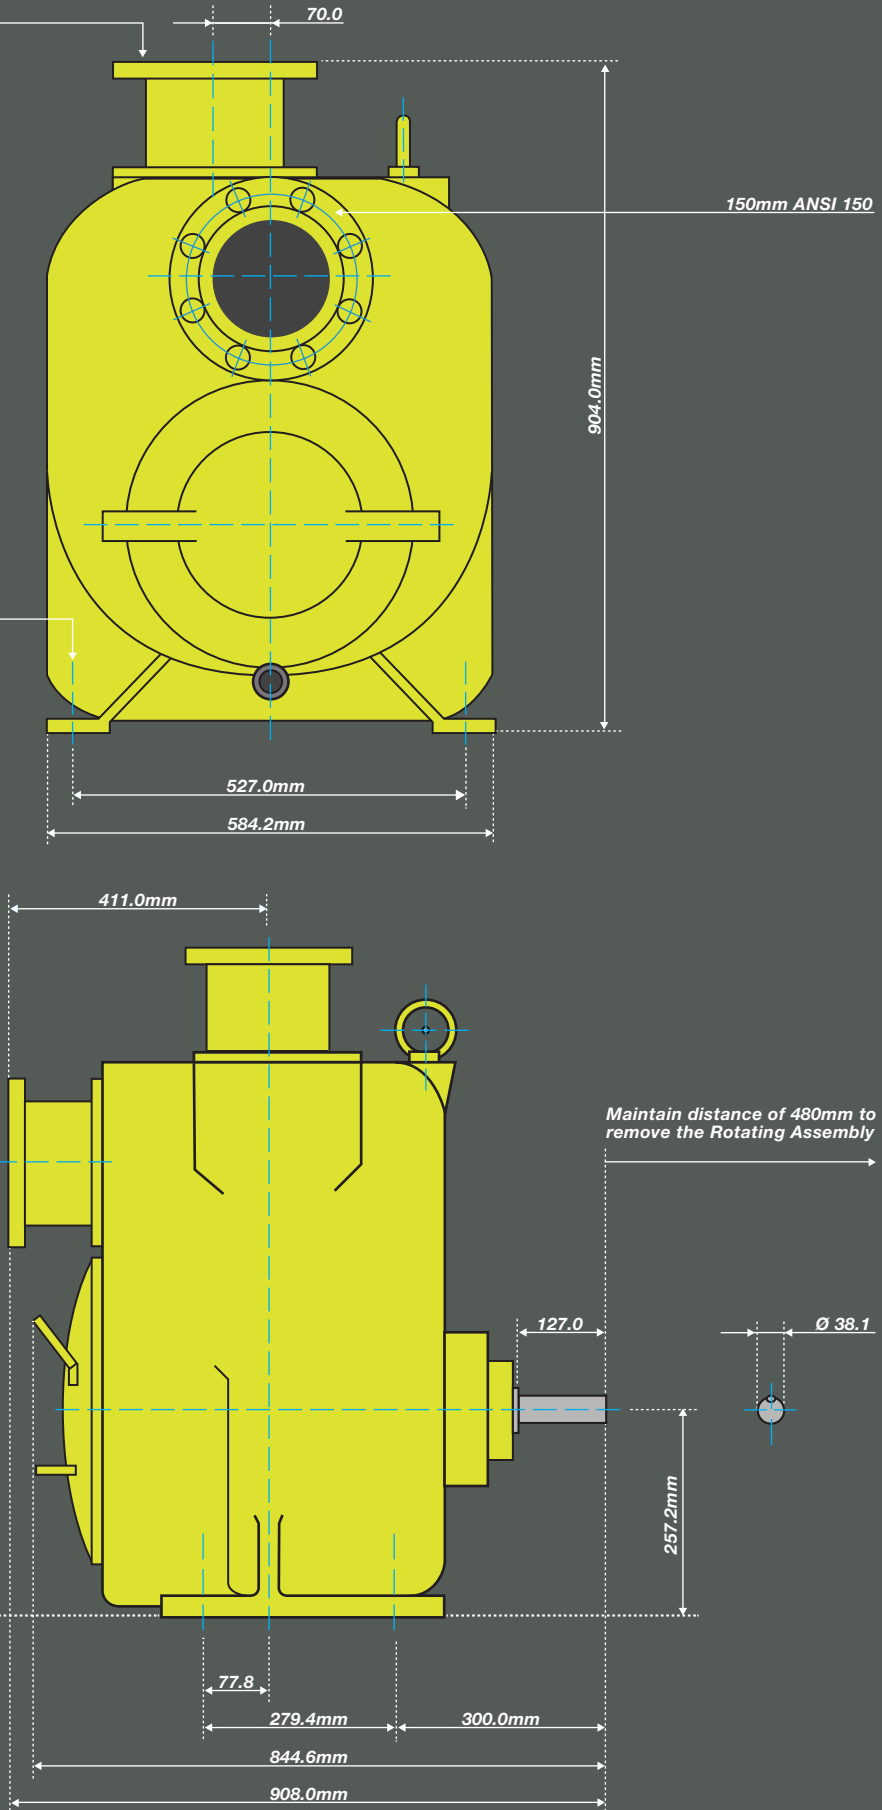



Contact your local Remko Distributor

Remko 1800 333 424