




## Product Data Sheet



### Advantage<sup>®</sup> for Gutters

A single component solvent free Gutter coating system using a moisture cured hybrid coating with added fibres, that is damp tolerant during application and is easily recoated. It provides excellent UV and mechanical protection while working with the thermal movement required from temperature changes that are experienced throughout the year.

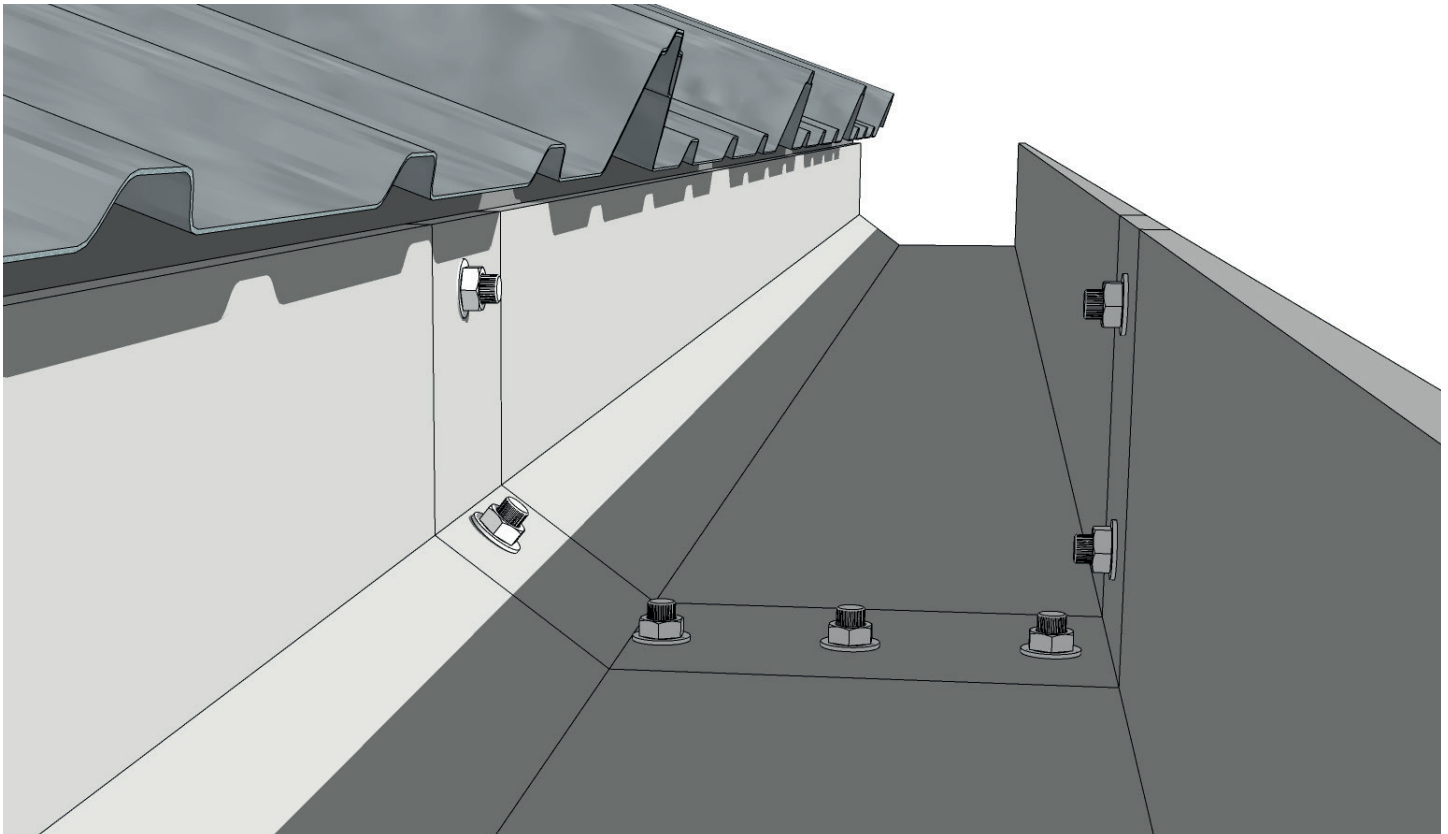

#### Benefits

- ✓ Damp tolerant during application
- ✓ Solvent and VOC Free
- ✓ Easy re-coating
- ✓ Isocyanate Free
- ✓ Applied in a single coat
- ✓ No shrinkage on curing
- ✓ Contains Fibres for enhanced tear strength
- ✓ Can be applied at temperatures between 3°C and 60°C
- ✓ Handles normal thermal movement with a high elasticity
- ✓ Minimum weight gain after application
- ✓ High weather and UV resistance for this one coat system
- ✓ Years of corrosion and waterproof protection that can increase gutter life
- ✓ Long term reliability due to excellent adhesion and UV resistance
- ✓ Latent Defect Insurance from Lloyds



## Product Data Sheet



## Advantage® for Gutters

### Preparation and Cleaning

All gutters should be cleaned and debris removed before application.

#### Metal Gutters

Clean and dry surface thoroughly to ST2 standard, you will find this easier with a rotary cleaning head. All oil, grease and dirt must be removed prior to application. Then using a wire brush remove rust and foreign matter. Brush or roller apply one coat of Advantage® Metal Primer to any corroded surface.

#### Asbestos Gutters

Asbestos gutters should be cleaned in line with HSE Guidelines on working with asbestos. Note that Alltimes Coatings are not able to provide advice or guidance on handling asbestos.

#### Bitumen Repairs & Membrane Lined Gutters


On sound previously applied bitumen gutters, apply one coat of Advantage® OptiSeal at a coverage of approx 10m<sup>2</sup> per litre to avoid bleed. Some previous coatings will need to be removed, contact our technical department for more details. For other substrates such as EPDM, single-ply, aluminium, GRP or concrete, adhesion tests may be required.

#### Joints

Apply Alltimes Advantage® Sealant to all joints and tool immediately wet on wet by brushing with Advantage® for Gutters to avoid creating a ridge, ensure all joint bolts are encapsulated.

### Application

Apply one coat of Advantage® for Gutters by brush or roller at a coverage of 2m<sup>2</sup> per Litre. Pay particular attention to fixings to ensure they are fully encapsulated.

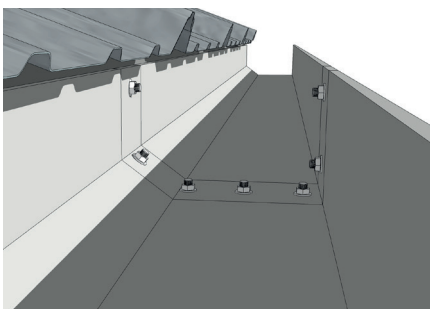

*No responsibility can be taken by the manufacturers where conditions of use are beyond our control. All products should be used in accordance with the manufacturer's instructions. For further information please refer to the application guide and Material Safety Data Sheet. This information and guidance is given in good faith and without prejudice and liability, Technical and Safety Data must be observed. All coverages are given as a guide only, as volumes will vary with profile, porosity and method of application. Loss factors should also be taken into account.*

### Technical Data

Form:	Viscous grey coloured liquid
Coverage:	2m <sup>2</sup> per 1L
Pack Size:	5 & 15 Litres
Shelf Life:	12 months
Temp. Limits:	3°C - 60°C

### Components

- **Advantage® Metal Primer:**  
1L & 2.5L Tins
- **Advantage® Sealant:**  
310ml Tube
- **Advantage® OptiSeal:**  
5L Kit Part A & Part B
- **Advantage® for Gutter:**  
5L Tins



#### Alltimes Coatings

Units C & D, Station Road Ind.  
Estate, South Woodchester,  
Stroud, Gloucestershire.  
GL5 5EQ. UK

T: 01453 872 850

E: [info@alltimescoatings.co.uk](mailto:info@alltimescoatings.co.uk)

W: [www.alltimescoatings.co.uk](http://www.alltimescoatings.co.uk)