


**Guide to:** Remove/ install new hot/Cold faucet

**Compiled by:** Aki Ainetdin

**Date:** 16.4.2019

Part number : 2204 Hot- and Coldwater manual faucet

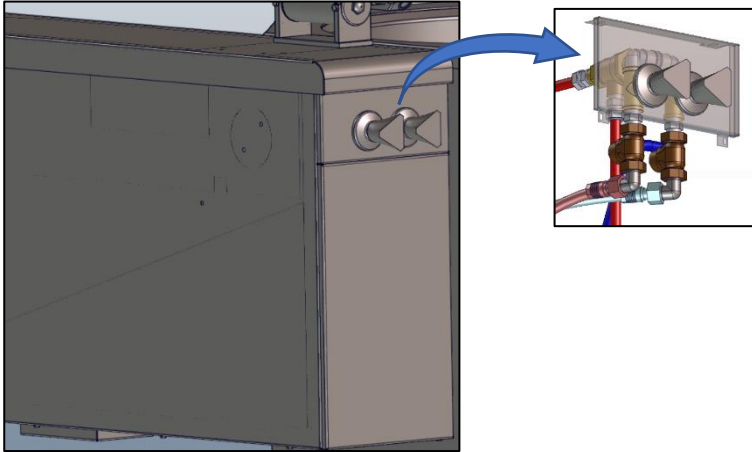

**Repreparation:** Disconnect hot-and cold water from the unit. Remove top cover and front cover. Also side cover if necessary.

**Tools:** Normal hand tools.

**Quick guide:**

1. Disconnect hose connections and Watts one-way valve pipe connection (image 1, Blue arrows)
2. Remove front panel completely by unscrewing four bolts shown on the image (Image 2)
3. Remove plastic cover on the top of the faucet knob (Image 3)
4. Unscrew knob holder screw that's locates under the plastic cover (part shown on image 4)
5. Remove knob by pulling it away from the unit
6. Remove the faucet front cover by turning it counterclockwise (part shown on image 4)
7. Use spanner tool to open fastener nut from (part shown on image 3)
8. Do steps 1 to 7 for both hot- and cold faucets
9. Remove valves from the front plate
10. Remove old valve and install new valve in opposite work order
11. Remember to check the correct position of the one-way valve!



**NOTICE**

Parts and work order might be different depending on model and options of the kettle.

