



Hosted VoIP Phone System

Blue Platform

Hosted Call Center Supervisor User Guide



Contents

1	About This Document.....	6
1.1	Audience.....	6
1.2	How This Guide is Organized.....	6
1.3	Software Requirements	7
2	Introduction to Call Center.....	8
2.1	Call Center – Supervisor.....	8
3	Getting Started.....	10
3.1	Launch Call Center from Web Portal	10
3.2	Sign in from Web Browser.....	11
3.3	Hot Desk Sign-in	12
3.4	Sign-in Restrictions	13
3.5	Get Help.....	13
3.6	Sign Out.....	13
3.7	Set Up Call Center	14
3.8	Change Your Password.....	15
3.9	Change Your ACD State	15
3.10	Enable or Disable Services	16
4	Explore Workspace.....	17
4.1	Logo Pane	18
4.1.1	Global Message Area	19
4.1.2	Links to Other Interface Elements and Functions	19
4.1.3	Logged User Information	19
4.2	Call Console	20
4.2.1	Header Bar	21
4.2.2	Dialer.....	21
4.2.3	Current Calls.....	22
4.2.4	Conference Call.....	22
4.2.5	Call States and Actions.....	23
4.3	Contacts Pane.....	23
4.3.1	Search Panel.....	25
4.3.2	Enterprise/Group Panel	26
4.3.3	Common Panel	26
4.3.4	Personal Panel.....	26
4.3.5	Agents Panel	26
4.3.6	Speed Dial Panel	27
4.3.7	Queues Panel.....	27
4.3.8	Custom Directories Panels	27
4.3.9	Outlook Panel.....	28
4.3.10	Directories Panel	29
4.4	Call History	30
4.5	Controls	31

- 4.5.1 Call Action Buttons32
- 5 Manage Calls35**
- 5.1 Call Management Operations Quick Reference36
- 5.2 Drag and Drop Call onto Contact38
- 5.3 View Calls38
 - 5.3.1 View Current Calls38
 - 5.3.2 View Incoming Call Details39
- 5.4 Assign Disposition Codes (Premium Call Center).....40
 - 5.4.1 Assign Disposition Codes to Current Call40
 - 5.4.2 Assign Disposition Codes in Wrap-Up40
- 5.5 Receive, Answer, and End Calls40
 - 5.5.1 Answer Call40
 - 5.5.2 Auto Answer Calls41
 - 5.5.3 Open URL.....41
 - 5.5.4 Save vCard41
 - 5.5.5 End Call42
- 5.6 Make Outbound Calls42
 - 5.6.1 Set Your Outgoing Calling Line Identity (Premium Call Center).....42
 - 5.6.2 Dial Ad Hoc Number42
 - 5.6.3 Redial Number43
 - 5.6.4 Dial Contact43
 - 5.6.5 Dial from Search.....44
 - 5.6.6 Dial from History44
- 5.7 Place Calls on Hold, Resume, and Camp Calls45
 - 5.7.1 Place Call on Hold.....45
 - 5.7.2 Resume Held Call45
 - 5.7.3 Conduct Busy Camp On.....45
- 5.8 Transfer Calls45
 - 5.8.1 Blind Transfer45
 - 5.8.2 Transfer with Consultation46
 - 5.8.3 Transfer to Queue46
- 5.9 Manage Conference Calls47
 - 5.9.1 Start Three-Way Conference47
 - 5.9.2 Add Participant to Conference.....48
 - 5.9.3 Hold Conference48
 - 5.9.4 Resume Conference48
 - 5.9.5 Hold Participant48
 - 5.9.6 Take Participant Off Hold.....48
 - 5.9.7 Leave Conference.....49
 - 5.9.8 End Participant49
 - 5.9.9 End Conference49
- 6 Manage Call History50**
- 6.1 View Call History50

6.2	Delete Call History	50
7	E-mail Contacts	51
7.1	Send E-mail Message to Contact	51
8	Manage Contacts.....	52
8.1	View Contacts	54
8.1.1	Show or Hide Directories	54
8.1.2	Display Directory Below Call Console.....	55
8.1.3	Show or Hide Directory Content.....	56
8.1.4	Show Contact Details.....	56
8.1.5	Select Display Order	57
8.2	Organize Contacts	57
8.2.1	Sort Contacts.....	57
8.3	Search for Contacts	58
8.3.1	Perform Contact Search	58
8.4	Manage Personal Contacts	59
8.4.1	Add Personal Contact	60
8.4.2	Delete Personal Contact.....	61
8.5	Manage Speed Dial Numbers.....	61
8.5.1	Add Speed Dial Entry.....	62
8.5.2	Modify Speed Dial Entry	62
8.5.3	Delete Speed Dial Entry.....	63
9	Manage Agents	64
9.1	Select Agents to Monitor.....	64
9.2	Agent Phone and ACD States.....	65
9.3	View Agent's Details	67
9.4	Change Agent ACD State	67
9.5	Silently Monitor Agent's Call	68
9.6	Barge in on Agent's Call	69
9.7	Pick Up Agent's Ringing Call.....	69
10	Manage Queued Calls.....	70
10.1	Queued Calls Pane.....	70
10.2	Select Call Centers to Monitor.....	72
10.3	Modify Number of Calls to Display (Premium Call Center).....	73
10.4	Show or Hide Call Center Panels.....	74
10.5	View Queued Calls	74
10.6	Group Queued Calls	74
10.7	Order Queued Calls.....	75
10.8	Monitor Next Call.....	75
10.9	Enable Night Service Override or Forced Forwarding (Premium Call Center).....	75
10.10	Retrieve Call from Queue	76
10.11	Promote Call in Queue (Premium Call Center).....	76
10.12	Transfer Call to Another Queue	77

10.13	Transfer Call from Queue to Agent	77
10.14	Transfer Call to Ad Hoc Number	77
10.15	Change Position of Call in Queue	77
10.16	Transfer Call to Top of Queue (Premium Call Center).....	78
11	View Real-Time Statistics	79
11.1	Display Dashboard.....	79
11.2	Queue Information	79
11.3	Agent Information.....	81
11.4	Select Information to Display.....	81
12	Generate Reports	83
12.1	Run Report	83
12.1.1	Report Results (Example).....	88
12.2	Schedule Report	89
12.3	Manage Scheduled Reports.....	94
13	Configure Call Center	95
13.1	Settings – General.....	96
13.1.1	Account.....	96
13.1.2	Hotel Guest.....	97
13.1.3	Language.....	97
13.1.4	Screen Pop.....	97
13.1.5	Date Format.....	98
13.1.6	Time Format	98
13.1.7	Workspace.....	98
13.2	Settings – Application.....	100
13.2.1	Barge-In & Monitor	100
13.3	Settings – Services.....	101
13.4	Settings – Plug-ins	102
13.4.1	Notification	102
13.4.2	Microsoft Outlook	103
13.4.3	LDAP v3.....	103
13.4.4	Program Shortcuts	104
13.4.5	Call Event Log	105
13.5	Settings – Messaging.....	106
13.5.1	E-mail Messaging.....	106
13.6	Settings – Report.....	107
13.6.1	Default Thresholds	107
13.6.2	Default Start Day of the Week	107
13.6.3	Default Service-level Calculations	108
13.7	Settings – About	108
14	Appendix A: Glossary and Definitions	109
14.1	ACD States.....	109
14.2	Agent Skill Levels (Premium Call Center).....	110

14.3	Phone States.....	110
14.4	Call States	111
14.5	Call Types.....	111
15	Appendix B: Keyboard Shortcuts	113

1 About This Document

This user guide provides step-by-step procedures and reference information for using the Hosted Call Center Release 19.0 client application.

1.1 Audience

This document is intended for Call Center supervisors who use the Hosted Call Center client.

1.2 How This Guide is Organized

The following table identifies the sections to refer to for information about the functionality provided by the Hosted Call Center.

Section	Overview
Introduction to Call Center	This section provides an overview of Call Center and the functionality available to supervisors.
Getting Started	This section describes how to sign in and out of Call Center, perform the initial setup, change a password, and obtain help.
Explore Workspace	This section provides an overview of the user interface.
Manage Calls	This section provides information on how to make and manage calls. This includes using your contacts to make calls or perform actions on existing calls.
Manage Call History	This section provides information on managing call logs.
E-mail Contacts	This section includes information on how to send e-mail messages to contacts.
Manage Contacts	This section provides information on managing contact directories and searching for contacts.
Manage Agents	This section describes how supervisors can use Call Center to manage agents under their supervision.
Manage Queued Calls	This section provides information on managing queued calls.
View Real-Time Statistics	This section describes the Dashboard that supervisors can use to monitor the state of selected call centers and agents.
Generate Reports	This section describes how to generate and schedule reports.
Configure Call Center	This section describes the settings you can configure to set up and customize Call Center for improved usability.
Appendix A: Glossary and Definitions	This appendix contains definitions of terms used in Call Center.
Appendix B: Keyboard Shortcuts	This appendix describes the keyboard shortcuts available in Call Center.

1.3 Software Requirements

The software requirements include:

- Operating Systems currently supported by Microsoft or Apple, or Citrix XenApp 4 or 5
- Sun Microsystems 32-bit Java 6 Update 19 to Update 45, Runtime edition only
- Sun Microsystems 32-bit Java 7 Update 11 or later, Runtime edition only
- Outlook 2003, 2007, 2010, or 2013 (32-bit or 64-bit edition) – Required for Outlook contact directory
- Microsoft Exchange 2007 SP3 or Microsoft Exchange 2010 SP1 – Required for Calendar Presence Integration
- Microsoft Excel (Optional)
- Flash Player 9 or 10.X Runtime (ActiveX Control)
- Internet Explorer 8.0, 9.0, or 10.0 (**Compatibility View enabled**); Firefox 3.6 through 25; Google Chrome 17.0.963.64 or later, or Safari 5

Browser Javascript Requirements:

Javascript must be enabled on Internet Explorer.

- 1) Open Internet Explorer
- 2) Click the **Tools** button.
- 3) From the drop-down list, select *Internet Options*.
- 4) Select the *Security* tab.
- 5) Select the **Internet Zone**.
- 6) Click the **Custom level...** button.
- 7) In the *Scripting* category, click the **Enable** button for the *Active Scripting* subcategory.
- 8) In the *Scripting* category, click the **Enable** button for the *Allow status bar updates via script* subcategory.
- 9) Click the **Yes** button when prompted with a message box asking, *Are you sure you want to change the settings for this zone?*
- 10) Click **OK** in the *Internet Options* dialog *Security* tab.
- 11) Close and restart Internet Explorer.

NOTE: Best practice recommends always using the latest available service pack/update for Windows, Max OS X, Internet Explorer, Firefox, Safari, and Outlook.

Internet Explorer 9.0 or higher (with Compatibility View enabled) is the recommended browser for best results with the Hosted Call Center client.

2 Introduction to Call Center

Hosted Call Center is a carrier-class, communications management product for Call Center agents and supervisors on which call centers are hosted.

Hosted Call Center delivers the following real benefits to users:

- Efficient call handling and automatic call distribution (ACD) state management by Call Center agents
- Integration of online directories with Click-To-Dial capability
- Real-time monitoring of agent and queue activity by Call Center supervisors
- Historical reporting on agent and queue activity by Call Center supervisors

Along with this focus on design, Call Center employs the latest technology platforms and communications facilities.

The Hosted Call Center is a Software as a Service (SaaS) Rich Internet Application (RIA) that allows you to manage call center activity from a web browser.

The Hosted Call Center client application herein is referred to as Call Center, Call Center client, Call Center application, or client.

The Call Center functionality available to you depends on the types of queues you are staffing or monitoring (Standard or Premium), and your own services and settings. For more information about the capabilities and services assigned to you, ask your group or enterprise administrator.

2.1 Call Center – Supervisor

The Call Center – Supervisor client is designed to support the needs of call center supervisors in any environment. It supports agent monitoring, queue management, real-time and historical reporting, and other features required in large call centers.

Figure 1 shows the main interface of the Call Center – Supervisor.

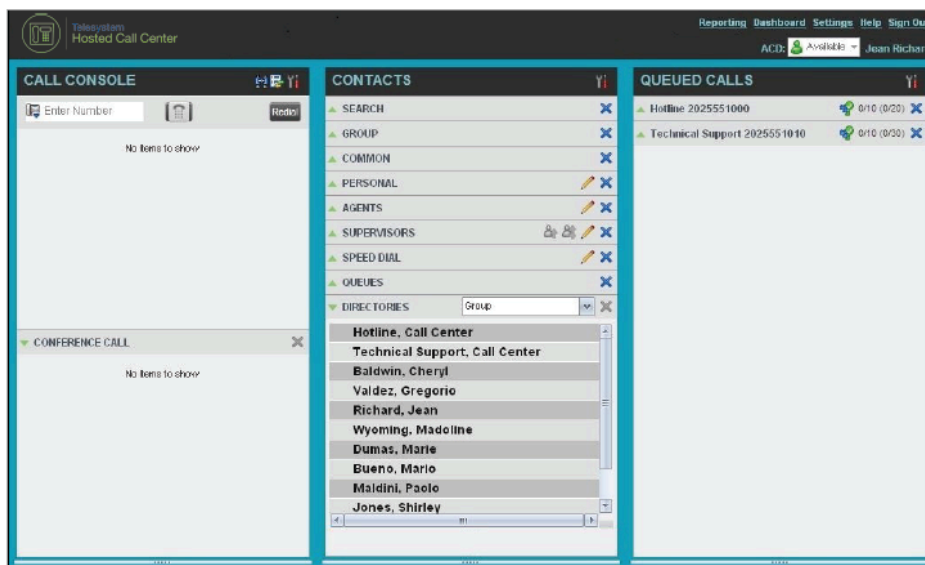


Figure 1 Call Center – Supervisor Main Interface

The Call Center interface contains the following work areas:

- **Logo pane** – The *Logo* pane displays information about you and contains links to other pages and functions.
- **Call Console** – You use the *Call Console* to view and manage your current calls.
- **Contacts pane** – The *Contacts* pane contains your contact directories and provides you with real-time call and ACD state of the agents you are monitoring.
- **Queued Calls pane** – You use the *Queued Calls* pane to manage queued calls.
- **Call History dialog box** – You use the *Call History* dialog box to view your past calls and make calls from history.
- **Dashboard** – The *Dashboard* provides real-time summary information for up to 50 queues and allows you to monitor key performance indicators for monitored call centers and supervised agents.
- **Report window** – You use the *Report* window, accessed via the Reporting link, to generate reports about the activity and performance of call centers and agents you manage.
- **Settings pages** – You use the *Settings* pages, accessed via the Settings link, to configure various aspects of Call Center.

For more information, see section [4 Explore Workspace](#).

For information on Call Center functions performed by supervisors, see the following sections:

- [Manage Agents](#)
- [Manage Queued Calls](#)
- [View Real-Time Statistics](#)
- [Generate Reports](#)

In addition, for information about other functions available to you, see the following sections:

- [Getting Started](#)
- [Manage Calls](#)
- [Manage Call History](#)
- [E-mail Contacts](#)
- [Manage Contacts](#)
- [Configure Call Center](#)

3 Getting Started

Call Center allows users to access it over the network either from your web portal or from a web browser. The sign-in procedure is the same for agents and supervisors.

NOTE 1: The minimum screen resolution required for the Call Center is 1024 x 768 pixels.

NOTE 2: Call Center does not support logging in as different users from the same machine at the same time.

NOTE 3: When using the Outlook Integration feature with Microsoft Outlook 2010 (32- or 64-bit edition), make sure Outlook is running before Call Center is launched; otherwise, the Outlook Integration functionality does not work.

NOTE 4: Java (minimum Version 7 Update 51) is required for some features to work. For best results it is recommended to access Call Center from Internet Explorer.

3.1 Launch Call Center from Web Portal

The Hosted VoIP Phone System has a Single Sign-On feature. When you access the Call Center client from the web portal, you do not need to provide your credentials since you are already logged in to the web portal.

To launch Call Center:

- 1) Log in to your Hosted VoIP Phone System web portal (<https://admin.euserportal.com>).
- 2) From the *Launch* drop-down list at the top right-hand side of the Telesystem logo pane, select the *Call Center* service. Call Center starts and you are automatically signed in.

3.2 Sign in from Web Browser

To sign in to the Call Center client, use the same credentials that you use to connect to the web portal.

To sign in to Call Center:

- 1) In your web browser, enter the Uniform Resource Locator (URL) of the Call Center client (<https://app.euserportal.com/callcenter/>). The *Call Center Sign-in* page appears.



Figure 2 Call Center Sign-in Page

- 2) Enter your Hosted VoIP Phone System user ID (10-digit phone number) and enter your password.
If you are unsure of your user ID or password, contact your administrator.
The system appends the default domain before authenticating you. However, if your domain is different from the default domain, you have to enter your user ID with the domain name.
Optionally, if your system has been configured to allow it, you can configure your domain name.
- 3) Check *Stay signed in* to instruct the client to automatically reconnect and sign in to the server when it detects a network connection.
This should generally be enabled to help mitigate intermittent internet connections. When disabled, the client signs out the user when the connection is lost.
- 4) To configure your domain name or the Call Center language, click **Show options**. The area expands, displaying advanced options.



Figure 3 Call Center Sign-in Dialog Box – Advanced Options

- 5) To configure your domain, in the *Append Domain* text box, enter your domain name. When you enter your user ID without a domain, the system appends the configured domain instead of the system-wide default domain.
- 6) To change the language, from the *Language* drop-down list, select a new language.
- 7) To add a bookmark to this page in your browser, click **Bookmark this page** and follow the instructions of your browser.
- 8) Click **Sign In**.
Call Center starts and you are signed in.

NOTE: In some browser/operating system combinations, when you press ENTER instead of the **Sign In** button, a blank page appears instead of the Call Center main interface.

3.3 Hot Desk Sign-in

If you are a Call Center agent, you can automatically associate yourself with a Hoteling Host phone device when you sign in to the Call Center client. This is commonly used in a shared workspace environment where users working different shifts share a single computer and phone.

To use hot desk functionality, you must have your Hoteling Guest service turned on. You turn on your Hoteling Guest service using the Hosted VoIP Phone System web portal or voice portal.

To sign in to Call Center as a hot desk user:

- 1) At the assigned workstation, start a web browser and enter the URL of the Call Center client. The *Call Center Sign-in* page appears.
- 2) Enter your Hosted VoIP Phone System user ID and password.
- 3) Click **Show options**. The area expands, displaying advanced options.
- 4) In the *Hotel Host* text box, enter the user ID of the Hoteling Host that corresponds to the desk/device you are using, for example, "station_224@acme.com".
- 5) To change the language of the user interface, from the *Language* drop-down list, select a new language.
- 6) Click **Sign In**.

You are signed in and Call Center associates that desk's phone with your user account for the duration of the session.

NOTE 1: When you sign out from the Call Center client, the guest session with the host device at the desk is terminated. After sign-out, the host user ID you entered is saved and can be reused on the next sign-in.

NOTE 2: The host/guest association can be configured with a time limit. If the association/session expires while you are signed in to the client, you are automatically signed out from client. The association time limit is specified in either the Hoteling Host or Hoteling Guest service setup on the Hosted VoIP Phone System web portal.

3.4 Sign-in Restrictions

You can only have one active Call Center session at a time. When you sign in from a second location, you are automatically signed out from the original location with the following message: “You have been signed out as you have signed in from another location.”

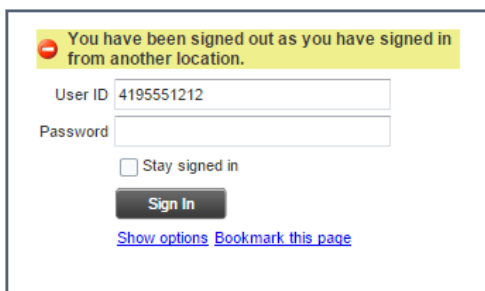


Figure 4 Sign-in Dialog Box with Error Message

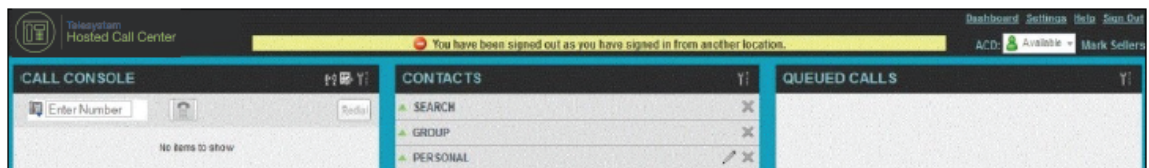


Figure 5 Main Interface (Top of Page) with Error Message

3.5 Get Help

Call Center provides you with online access to a portable document format (PDF) version of the Call Center User’s Guide.



Figure 6 Logo Pane with Help Link

To access the document, click the **Help** link in the top right-hand side of the main interface.

3.6 Sign Out

- 1) To sign out of Call Center, click **Sign Out** at the top right-hand side of the main interface.

If you are the last agent to sign out of a call center, a message appears, providing the details of queues in which you are the last agent to sign out and asking you to confirm that you want to sign out.

NOTE: This functionality is not available when you close the application using the browser's Close button or when you refresh (F5) the browser.



Figure 7 Dialog Box – Signing Out Last

- 2) To stay signed in, click **No**. You are returned to the application.
 - To continue signing out, click **Yes**.

A message appears asking whether you would like to save your current workspace.

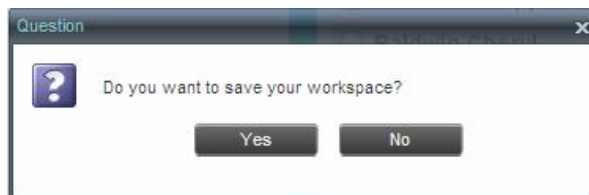


Figure 8 Dialog Box – Saving Workspace on Sign Out

- To save your current workspace, click **Yes**. This allows you to retain the same interface setup at your next session. For information about the elements of the Call Center workspace that can be customized and retained between sessions, see section [13.1.7 Workspace](#).

If you are signing out from a hot desk, your account is dissociated from the hot desk where you were signed in.

3.7 Set Up Call Center

When you sign in to Call Center for the first time, it is recommended that you configure the following settings:

- Configure agents you want to monitor. For more information, see section [9.1 Select Agents to Monitor](#).
- Configure queues you want to monitor. For more information, see section [10.2 Select Call Centers to Monitor](#).

For more information about the settings you can configure in Call Center, see section [13 Configure Call Center](#).

3.8 Change Your Password

You can change your password when you are signed in to Call Center.

- 1) To change your password, click the **Settings** link at the top right-hand side of the main page.
- 2) Click the **General** tab and then click **Change Password**.



Figure 9 Changing Password

- 3) Enter your old and new password in the provided text boxes and click **Change Password**.
Note that the Reset button does not reset your password. It only clears the input boxes.

NOTE: This password is shared with your web portal and other client applications that share the Hosted VoIP Phone System Single Sign-On feature. It must meet the password requirements set by the administrator.

3.9 Change Your ACD State

When you sign in to Call Center, your ACD state is set to the post sign-in ACD state set on the *Settings* page.

To change your ACD state:

- 1) At the top right-hand side of the main window, select your ACD state from the *ACD* drop-down list.



Figure 10 Logo Pane – ACD State Control

- 2) If you selected *Unavailable* and your company requires you to provide a reason for your unavailability, select an *Unavailable Code* from the drop-down list.

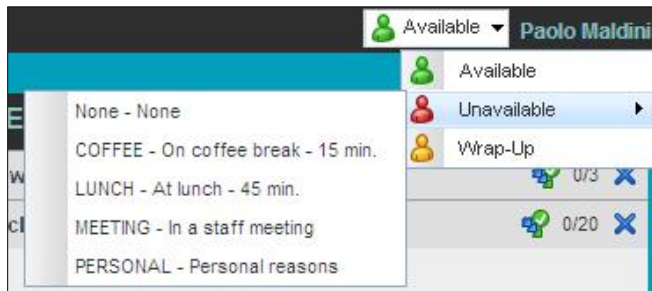




Figure 11 Logo Pane – Unavailable Codes

3.10 Enable or Disable Services

You can use the following services in Call Center: Call Waiting, Call Forwarding Always, and Do Not Disturb, provided that your administrator has assigned the services to you.

To enable or disable Call Waiting:

- 1) In the *Call Console*, click **Call Waiting** . The button changes to this  to indicate that the service is enabled.
- 2) To disable it, click the button again.

To enable or disable Do Not Disturb or Call Forwarding Always:

- 1) At the top right-hand corner of the main page, click **Settings**. The *Settings* page appears.
- 2) Click the **Services** tab.
- 3) On the *Services* page that appears, select the service you want to enable or disable, and check or uncheck the *is Active* box.
- 4) If you checked the *is Active* box for the Call Forwarding Always service, in the *Forward To* text box, enter the phone number to forward your call to.
- 5) Click **Save**.

For more information, see section [13 Configure Call Center](#).

4 Explore Workspace

When you sign in to Call Center, the main page appears where you perform most of your call management or monitoring tasks. In addition, the main page provides links to other pages and windows of Call Center, where you perform functions such as configuration and report generation.

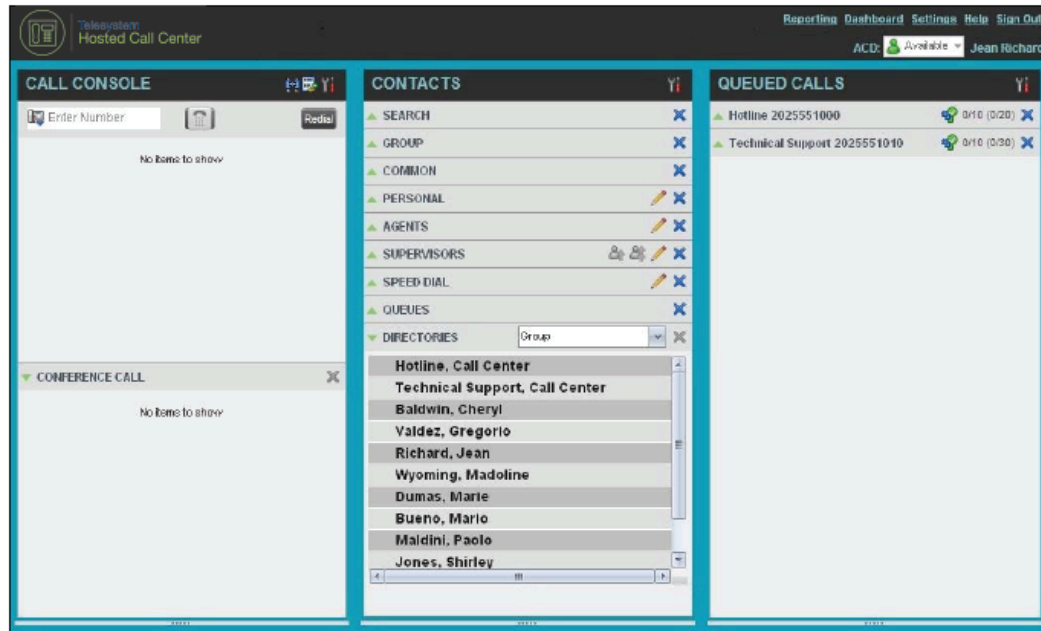


Figure 12 Call Center – Supervisor Main Interface

Many visual aspects of the Call Center workspace are configurable. For example, you can change the size and placement of windows on the screen. You can then save your workspace and retrieve it the next time you sign in. For more information on saving your workspace settings, see section [13.1.7 Workspace](#).

NOTE 1: To work in full screen mode, make sure that the main window is in focus and then click **F11**.

NOTE 2: The Back, Forward, and Refresh operations of the web browser are not supported by Call Center, and if performed, the results are inconsistent.

NOTE 3: When a window is vertically resized, the panes do not always resize to fill the window. To resize a window, drag the window from the bottom right-hand corner or collapse and then expand the panes after resizing to adjust them to the window.

Most call center controls are context-based, which means that they appear only when the action they represent can be taken. Context-based controls that allow you to take actions on calls are called action buttons. For the list of controls available in Call Center, see section [4.5 Controls](#). The action buttons are described in section [4.5.1 Call Action Buttons](#).

The Call Center interface contains the following elements:

Interface Element	Description
Logo Pane	Located at the top of the main interface, the <i>Logo</i> pane displays global messages, information about the logged user, and links to other Call Center interface elements and functions.
Call Console	The <i>Call Console</i> is where you manage your current calls.
Contacts Pane	The <i>Contacts</i> pane contains your contact directories and allows you to manage your contacts and use contacts to make calls or take actions, such as transfer to contact or queue, on existing calls.
Queued Calls Pane	The <i>Queued Calls</i> pane, available only to supervisors, allows you to manage queued calls for selected call centers that you supervise.
Call History Window	The <i>Call History</i> window, accessible from the <i>Call Console</i> via the Call History button, displays your placed, received, and missed calls, and allows you to make calls from history and delete call logs.
Report Windows	The <i>Report</i> windows, accessible from the main page via the Reporting link, provide access to Enhanced Reporting, allowing you to generate, schedule, and view reports. Agents can only generate reports about themselves.
Dashboard	The <i>Dashboard</i> , accessible from the main page via the Dashboard link, provides you with real-time summary information about the call centers and agents you supervise (up to 50).
Settings Pages	The <i>Settings</i> pages, accessible from the main page via the Settings link, allow you to configure various user-level and application settings.
Controls	You use controls, such as buttons and drop-down lists to execute actions on calls, contacts, queues, and so on.

This section describes the following elements of the Call Center interface:

- [Logo Pane](#)
- [Call Console](#)
- [Contacts Pane](#)
- [Call History](#)
- [Controls](#)

For information about other interface elements, see the following sections:

- *Queued Calls* pane – Section [10.1 Queued Calls Pane](#)
- *Report* windows – Section [12 Generate Reports](#)
- *Dashboard* – Section [11 View Real-Time Statistics](#)
- *Settings* pages – Section [13 Configure Call Center](#)

4.1 Logo Pane

The Call Center main window interface contains a logo pane that displays the Call Center client or company logo, global messages, links to other interface elements or Call Center functions, and information about the logged-in user.




Figure 13 Call Center Logo Pane

4.1.1 Global Message Area

The *Global Message Area*, that is, the center area of the *Logo* pane, is used by Call Center to display various information, warnings, and error messages to the user. A message is displayed for several seconds and then it disappears.

4.1.2 Links to Other Interface Elements and Functions




The *Logo* pane displays links to the *Report* windows, *Settings* pages, the *Dashboard* (Supervisors), and the Help and Sign Out links.

4.1.3 Logged User Information

Information about yourself, that is, your name and your availability to take calls is displayed at the top right-hand side of the main interface.

- ACD state 

In addition, information about the following services and features is provided:

- Do Not Disturb (DND) 
- Call Forwarding Always (CFA) 
- Busy phone state 

4.2 Call Console

You use the *Call Console* to view and manage your current calls. For information on managing your calls, see section [5 Manage Calls](#).

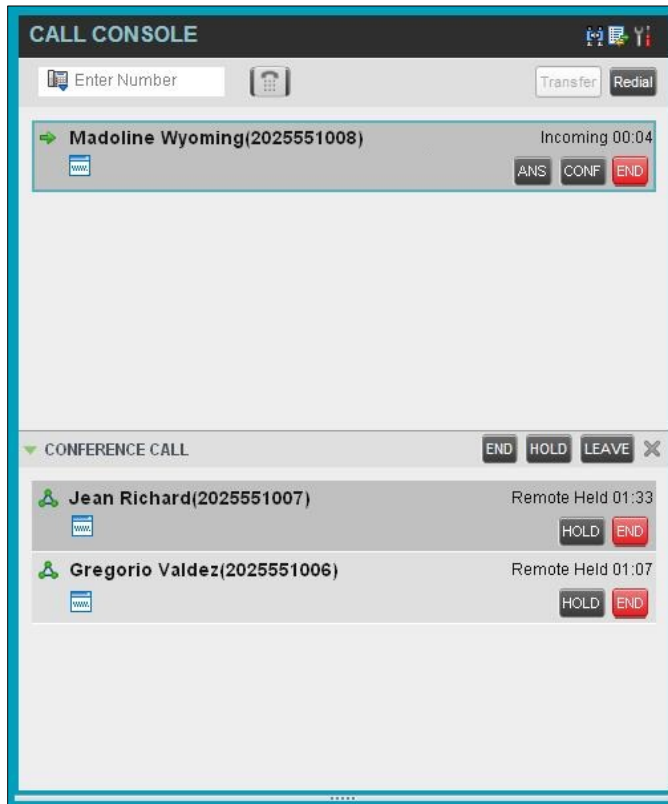


Figure 14 Call Console

The *Call Console* contains the following areas:

- [Header Bar](#)
- [Dialer](#)
- [Current Calls](#)
- [Conference Call](#)

4.2.1 Header Bar

The header bar contains various controls that allow you to configure your services and perform call and service-related actions.








Figure 15 Call Console Header Bar

The header bar can contain the following controls:

- Disposition Code button  – This allows you to assign disposition codes to the last call. The button only appears when you are in *Wrap-Up* state.
- Call History button  – This allows you to access the list of your previous calls.
- Auto Answer button  – This allows you to enable or disable the automatic answering of calls.
- Call Waiting button  – This allows you to enable or disable the Call Waiting service.


4.2.2 Dialer

The *Dialer*, located at the top of the *Call Console*, below the header bar, allows you to make ad hoc calls and set your outgoing calling line identity (CLID) for the next call.



Figure 16 Dialer

It contains the following elements:

- The Outbound CLID button , which allows you to configure the number you want to use for outgoing calls.
- The *Enter Number* text box, in which you enter the number to dial.
- Action buttons, which change depending on the context and allow you to perform operations on calls. For more information, see section [4.5.1 Call Action Buttons](#).

4.2.3 Current Calls

The *Call Console* displays your current calls, both direct and ACD, and allows you to take actions on them. Direct calls are calls placed from or received on your own phone number, whereas ACD calls are calls routed to you from a call center that you are staffing as an agent.

If you are involved in a conference call, its details are displayed in a separate area of the Call Console, called the *Conference Call* panel. The *Conference Call* panel is described in the following section.



Figure 17 Call Console – Current Calls

The following information is displayed for each call:

- Call State icon – This is a visual representation of the current state of the call. For more information, see section [4.2.5 Call States and Actions](#).
- Remote CLID – This is the name of the remote party (if available) and the phone number in parenthesis.
- Call State name – This is the display name of the “call” state the call is currently in.
- Call duration [Held duration] – This is the duration of the call from the time the call was received from the Hosted VoIP Phone System and it reflects how long the call has been present in the system. In addition, for held calls, the time a call has been on hold is displayed.

The call entry also displays action buttons for the operations that you can currently take on that call. The actions you can perform depend on the state of the call.

For the list of Call Center action buttons, see section [4.5.1 Call Action Buttons](#) and for the list of actions that can be taken in each call state, see section [4.2.5 Call States and Actions](#).

4.2.4 Conference Call





The *Conference Call* panel displays your current conference and allows you to manage your conference calls.

NOTE: You can only be involved in one conference call at a time.



Figure 18 Call Console – Conference Call

The header bar contains various controls that allow you to manage the conference:










-  End Conference button – This allows you to end the current conference.
-  Leave Conference button – This allows you to leave the conference.
-  Hold Conference button – This allows you to place the conference on hold.
-  Resume Conference button – This allows you to resume the conference that you previously placed on hold.

The *Conference Call* panel, when expanded, lists the call legs that make up your current conference. Each two-way call is displayed on a separate line. The information displayed for each call leg is the same as the information displayed for two-way calls. For information, see section [4.2.3 Current Calls](#).

For information on managing conferences, see section [5.9 Manage Conference Calls](#).

4.2.5 Call States and Actions

The following table lists the possible call states and actions that can be performed on calls in each state.

Call State	Display Name	Display Icon	Call Personality	Call Actions
Ringing In (Local)	Incoming Local		Click-To-Dial	Answer, End
Ringing In (Remote)	Incoming		Terminator	Answer, Conference, End
Ringing Out, Outgoing	Outgoing		Originator	Conference, End
Active	Active		Any	Transfer, Hold, End, Conference
On Hold	Held		Any	Transfer, Resume, End, Conference
On Hold (Remote)	Remote Held		Any	Transfer, Hold, End, Conference
Active (In Conference)	Active		Conference	Transfer, Hold, End
Held (In Conference)	Held		Conference	Resume, Transfer, End
Ringing In (Recalled Call)	Call Recalled		Terminator	Answer, Conference, End

NOTE: If a Trace option is required please call Telesystem directly. Due to legal regulations a subpoena may be required to obtain these records.

4.3 Contacts Pane

The *Contacts* pane contains your contact directories and allows you to use your contacts to make or manage calls. For information on using contacts to manage calls, see section [5 Manage Calls](#).

For information about organizing and managing your contact directories, see section [8 Manage Contacts](#).

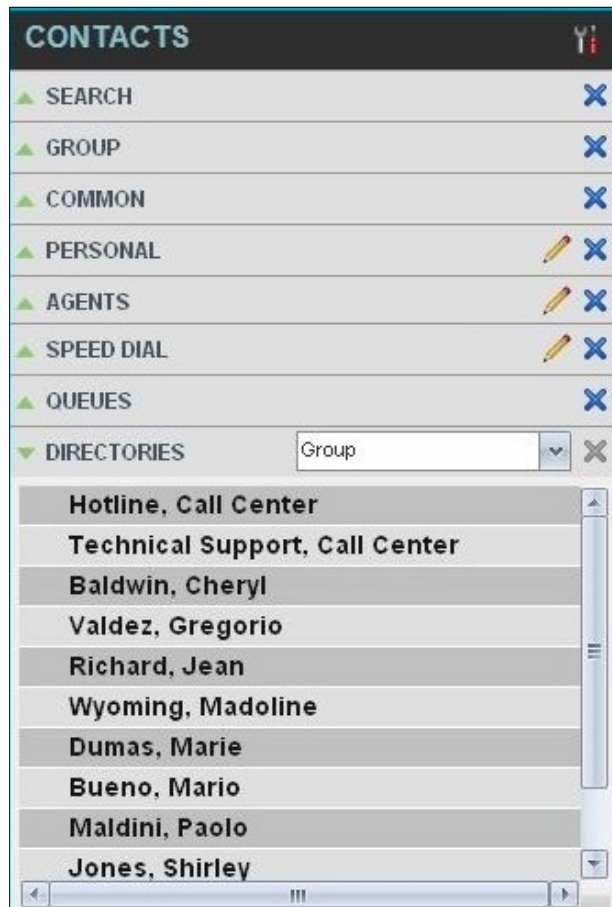


Figure 19 Contacts Pane

The *Contacts* pane contains the following panels:

- [Search Panel](#)
- [Enterprise/Group Panel](#)
- [Common Panel](#)
- [Agents Panel](#)
- [Speed Dial Panel](#)
- [Queues Panel](#)
- [Custom Directories Panels](#)
- [Outlook Panel](#)
- [Directories Panel](#)

The contact directories you have access to depend on your system configuration as well as the services assigned to you. For more information, contact your administrator.

The directories you see in the *Contacts* pane also depend on your setup. For information on selecting the directories to display in the *Contacts* pane, see section [8.1.1 Show or Hide Directories](#).

When you click a contact, the entry expands and the contact's information, such as phone numbers and the action buttons for the operations that you can currently take on that contact appear.

You can only view the details of one contact per directory at a time. When you click another contact in the same directory, the details of the currently expanded contact are automatically hidden.



Figure 20 Group Panel – Contact in Focus with Action Buttons

For the list of Call Center action buttons, see section [4.5.1 Call Action Buttons](#).

4.3.1 Search Panel

You use the *Search* panel to look for specific contacts in your contacts' directories and, if available, in the configured *LDAP* directory. For information about performing contact searches, see section [8.3 Search for Contacts](#).




Figure 21 Contacts Pane – Search Panel

4.3.2 Enterprise/Group Panel

The *Enterprise/Group* panel contains the contacts in your group directory (if your group is part of a service provider) or enterprise directory (if your group is part of an enterprise. However, if your enterprise administrator restricted your access to the enterprise directory, you can only see the contacts from your group.)



Figure 22 Contacts Pane – Group Panel

4.3.3 Common Panel

The *Common* directory contains the contacts in your group's common phone list configured by your administrator on the Hosted VoIP Phone System Admin web portal.

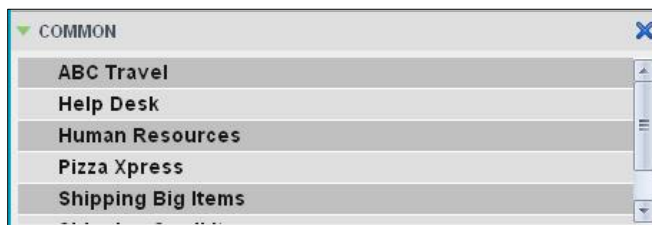


Figure 23 Contacts Pane – Common Panel

4.3.4 Personal Panel

The *Personal* panel contains the contacts from your Hosted VoIP Phone System User Personal Phone List. It displays the name/description and phone number of each contact.

For information about managing your personal contacts, see section [8.4 Manage Personal Contacts](#).

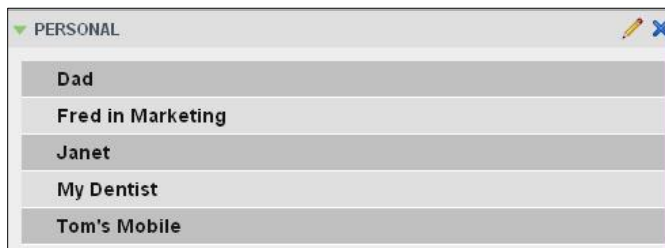


Figure 24 Contacts Pane – Personal Panel

4.3.5 Agents Panel

The *Agents* panel is used by supervisors to monitor and manage agents under their supervision. For more information, see section [9 Manage Agents](#).

AGENTS	
Unavailable	Valdez, Gregorio
Sign-Out	Wyoming, Madoline
Wrap-Up	Dumas, Marie
Sign-Out	Maldini, Paolo
Wrap-Up	Jones, Shirley
Available	Smith, Stan

Figure 25 Contacts Pane – Agents Panel

4.3.6 Speed Dial Panel

The *Speed Dial* panel allows you to manage your Speed Dial 8 and Speed Dial 100 contacts. It is available to users who have been assigned Speed Dial 8 and/or Speed Dial 100 services. If you only have one of these services, you only see the entries for that service in your *Speed Dial* directory.

For each configured speed dial number, Call Center displays the speed dial code and description. The description is what you entered when configuring the number.

For information about managing your *Speed Dial* directory in Call Center, see section [8.5](#)

[Manage Speed Dial Numbers.](#)

SPEED DIAL	
2	Greg
3	Daycare
4	My bank
#11	Pizza Pizza

Figure 26 Contacts Pane – Speed Dial Panel

4.3.7 Queues Panel

The *Queues* panel lists the call centers you are monitoring as a supervisor and the associated Dialed Number Identification Service (DNIS) numbers. The primary purpose of this panel is to provide you with a quick way to transfer calls to queues.

QUEUES	
Hotline	
VIP	
Technical Support	
Internal	
Major Accounts	

Figure 27 Contacts Pane – Queues Panel

4.3.8 Custom Directories Panels

If your administrator has configured custom contact directories for your group, you can access them from Call Center. A custom directory contains a subset of the contacts in your group or enterprise directory.

NOTE: A custom directory has the same properties as the *Group/Enterprise* directory.

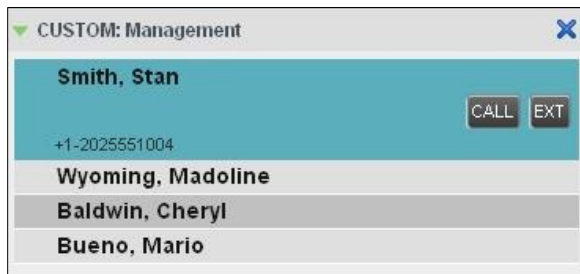


Figure 28 Contacts Pane – Custom Panel

4.3.9 Outlook Panel

The *Outlook* panel contains your Outlook contacts. This panel is available to you if you have the Outlook Integration service assigned.

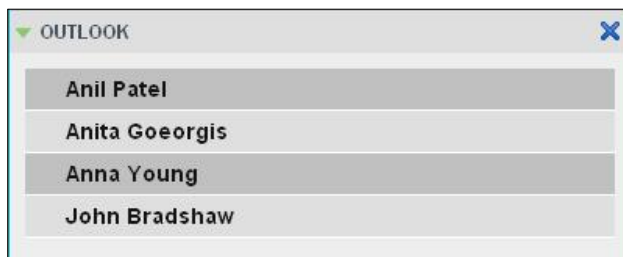


Figure 29 Contacts Pane – Outlook Panel

NOTE: If Outlook contacts are not loading, log out of Call Center and clear your browser's cache. Then log back into Call Center and then refresh the page.

4.3.10 Directories Panel

The *Directories* panel consolidates the contacts from the following directories: *Enterprise/Group*, *Custom*, *Personal*, *Outlook*, and *Speed Dial*. This panel is always visible. You can choose which directories to display in the *Directories* panel and you can collapse the panel, but you cannot close it.

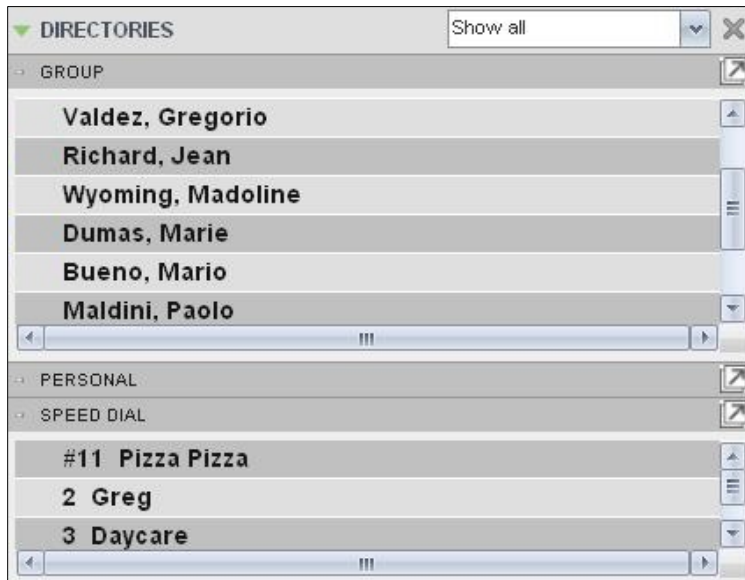


Figure 30 Contacts Pane – Directories Panel

You can also place a copy of a directory below the *Call Console*. This allows you to view more than one directory at a time easily. For more information, see section [8 Manage Contacts](#).

4.4 Call History

The *Call History* dialog box, accessed from the *Call Console* via the Call History button, allows you to view your past calls. You can place a call to a number from Call History and manage call logs. For information on making calls from Call History, see section [5 Manage Calls](#), and for information on managing your call logs, see section [6 Manage Call History](#).

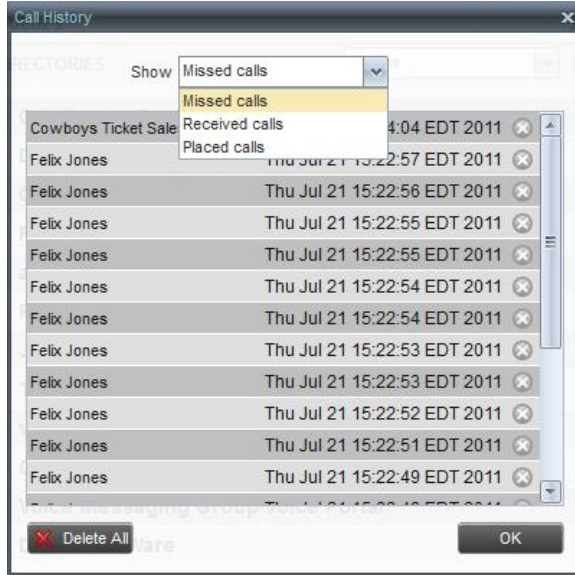


Figure 31 Call History Dialog Box

Each call log is displayed on a separate line. Call logs are grouped in three categories: Missed calls, Received calls, and Placed calls. The following information is displayed for each call log:

- The name or phone number of the remote party
- The date and time when the call was initiated

When you click a call log, the Call Action button appears, allowing you to place a call to the remote party.
















Figure 32 Call History Dialog Box – Call Log with Call Action Button

For the list of action buttons available in Call Center, see section [4.5.1 Call Action Buttons](#).

4.5 Controls

Call Center controls are designed in a contextual manner, that is, most controls appear only when the action they represent can be taken. For example, when you enter a number or select a contact, a Dial button appears, allowing you to place a call. The contextual controls that correspond to call operations such as dialing, transferring calls, or putting calls on hold are called action buttons. They appear on the Dialer, in a call entry, in a directory entry (contact), in a call log, or on a queued call.

The following table lists the general controls available for Call Center and the controls that may be displayed on the headers in the panels. Configurations for Call Center may vary for each organization. For more information on the action buttons, see section [4.5.1 Call Action Buttons](#).

Name	Description
Common Controls	
 Options	This is located in the upper-right corner of a pane or page. When clicked, it displays a drop-down menu of options that control the display of information in that pane/page. The available options depend on the context.
 Expand/Collapse	This shows or hides the contents of a window or panel.
 Close	This closes an interface element, such as window, pane, or panel.
 Edit	This allows you to edit a list of items, such as agents to monitor or speed dials.
Logo Bar, Dialer, Call Console, Directories Panel, and Search Panel Controls	
 Web Pop URL	This opens a page in your browser at the configured URL to provide additional information about the caller.
 Outbound CLID	This allows you to select the phone number to use as your Calling Line ID for the next outgoing call.
 Disposition Code	This allows you to apply one or more disposition codes to the last call when you are in <i>Wrap-Up</i> .
Disposition : <input type="text"/>	This allows you to apply one or more disposition codes to the selected call.
 ACD State	This displays your current ACD state and allows you to change it.
 Call History	This displays Call History.
 Auto Answer	This allows you to turn Auto Answering on or off.
 Call Waiting	This allows you to turn Call Waiting on or off. It is available only if you have been assigned the Call Waiting service.
 End Conference	This ends a conference call.
 Leave Conference	This disconnects you from the conference while allowing other participants to continue the call.

Name	Description
Hold Conference	This holds the conference call.
Resume Conference	This resumes a held conference.
Barge In	This "un-mutes" your Silent Monitoring call, thereby establishing a Three-Way Conference.
Pull Out Directory	This places a selected directory below the Call Console.
Call Notification Pop-up Window	
Web Pop URL	This opens a page in your browser at the configured URL to provide additional information about the caller.
vCard	This saves the caller's phone number and personal information as a vCard in Microsoft Outlook. It appears only when Outlook is running.
Queued Calls Pane – Call Center Queue Panel	
Service Mode	This identifies and allows you to change the service mode of a supervised call center.
Scheduled Reports Window	
Load Report	This loads a scheduled report, allowing you to view and modify it.
Delete Report	This deletes a scheduled report.

4.5.1 Call Action Buttons

Action buttons allow you to perform actions on calls, such as answering or transferring a call, or actions that result in a call being placed, such as dialing a number or contact. They appear on the Dialer, on a call line, in a call history log, in a directory entry, or (for supervisors) in a queued call entry.

Action buttons are contextual, that is, they appear on a line/entry when the corresponding action can be performed on that entry.

For example, when you click a contact in the *Group* directory, the contact expands and the Call and Extension buttons appear on the line for that contact, allowing you to call the contact. This is illustrated in *Figure 33*. Note that other buttons may appear on the line for a contact, depending on the call state and the contact's configuration.

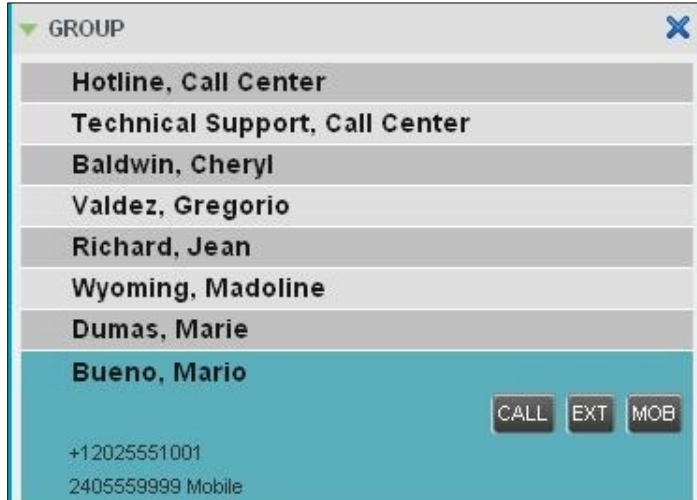













Figure 33 Group Panel – Contact in Focus

The following table lists the action buttons available in Call Center. The availability of each button is dependent on the Call Center configuration specific to your organization.

Button	Description
Dial	This dials the number you entered in the <i>Dialer</i> .
Call	This places a call to the selected contact or to a number from Call History.
Redial	This redials the last dialed number.
Extension	This dials the contact's extension.
Mobile	This dials the contact's mobile number.
E-mail	This brings up a new e-mail message window with the contact's e-mail address, allowing you to send a message to the contact.
Transfer	This transfers a call to an ad hoc number entered in the <i>Dialer</i> .
Transfer	This transfers a call to a selected number or contact.
Answer	This answers an incoming call, answers an unanswered call for a contact, or resumes a held call.
Hold	This places a call on hold.
End	This ends a call.
Conference	This establishes a conference call or adds a call to a conference.
Camp	This camps a call on a busy contact.
Escalate Call	This escalates a call to a selected supervisor.

Button	Description
 Emergency Call	This places an emergency call to a selected supervisor.
 Web Pop URL	This opens a page in your browser at the configured URL to provide additional information about the caller.
 Delete Call Log	This deletes a call log from Call History.
For Supervisors Only	
 Monitor Next Call	This allows the supervisor to silently monitor the next call for a selected agent or call center.
 Monitor	This allows the supervisor to silently monitor the current call for a selected agent with an active call.
 ACD State	This allows the supervisor to change a selected agent's ACD state.
 Barge In	This allows the supervisor to barge in on an agent's call, by establishing a Three-Way Call between the supervisor and the two parties involved in the call.
 Answer	This answers an unanswered call for a monitored agent.
 Promote	This promotes a selected call to the next highest priority bucket within the queue.
 Retrieve	This retrieves a call from the queue to the supervisor's device. When a call is manually retrieved via this action, the call is reported as an <i>Incoming</i> call rather than an <i>ACD</i> call in the reports.
 Reorder	This changes a call's position in the queue.

5 Manage Calls

This section describes the operations you can perform to make and manage calls.

Your current calls are displayed in the *Call Console* with the calls currently involved in a conference displayed in a separate panel called *Conference Call*.

NOTE: You can only be involved in one conference at a time.

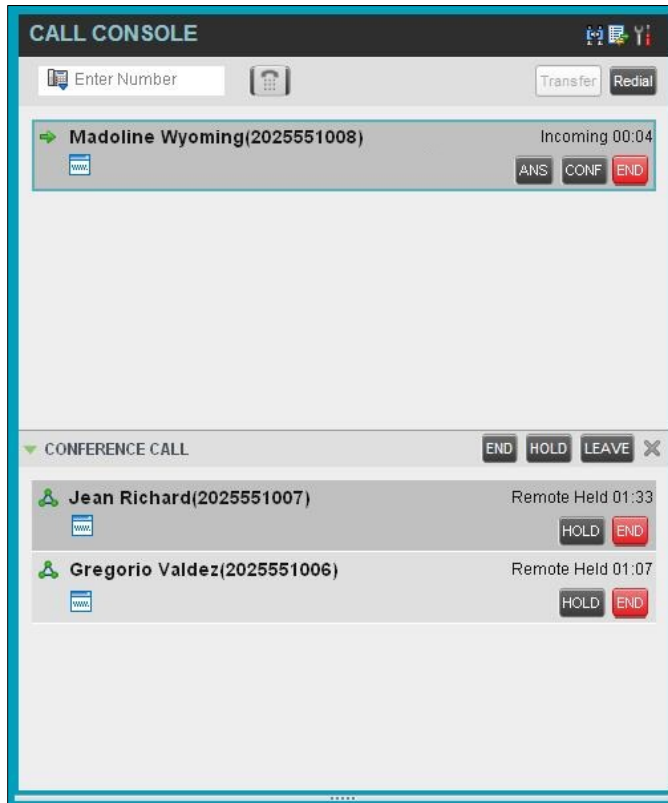


Figure 34 Call Console

The following subsection provides a quick reference to call management operations. These operations are described in detail in the rest of this section.

NOTE: For operations on calls that involve a contact, you can drag the call onto the contact and click the button for that contact, which corresponds to the operation you want to perform. For information, see [5.2 Drag and Drop Call onto Contact](#).

5.1 Call Management Operations Quick Reference

The following table provides a summary of the actions that you can take to manage calls. These actions (operations) are described in more detail in the following sections. The availability of the actions is dependent on the configuration of your organization's Call Center.

Function	Steps
Assign Disposition Code to Selected ACD Call	In the <i>Call Console</i> , click the target ACD call and select a code from the drop-down list that appears.
Assign Disposition Code while in Wrap-Up	In the <i>Call Console</i> , click the Disposition Code button and select a code from the list. The code is applied to the last released call.
Answer Incoming Call	In the <i>Call Console</i> , click Answer for the target call.
Turn Auto Answer On	In the <i>Call Console</i> , click Auto Answer .
Open URL	In the <i>Call Notification</i> dialog box for an incoming call or on any call in the <i>Call Console</i> , click the Web Pop URL button.
Save a vCard	In the <i>Call Notification</i> dialog box for an incoming call, click the Add vCard button.
Place Call on Hold	In the <i>Call Console</i> , move the mouse over the call and click Hold .
Resume Held Call	In the <i>Call Console</i> , move the mouse over the call and click Retrieve .
Blind Transfer Call	Drag the call onto the target contact and click Transfer for that contact. Alternatively, enter the target number in the <i>Dialer</i> and click Transfer on the <i>Dialer</i> .
Transfer with Consultation	While on the call, enter a number in the <i>Dialer</i> or select a contact in the <i>Contacts</i> pane and click Dial . When the new call is connected, consult with the party. When ready to transfer, select the original call. Move the mouse over the new call that is not selected call and click Transfer .
Transfer to Queue	Drag the call onto the target queue in the <i>Queues</i> panel and click Transfer for that queue.
Make Emergency Call to Available Supervisor	In the <i>Call Console</i> , select the call to escalate and click the Emergency button in the <i>Supervisors</i> panel.
Make Emergency Call to Selected Supervisor	Drag the call to escalate onto an available supervisor in the <i>Supervisors</i> panel and click Emergency for that supervisor.
Blind Escalate Call	In the <i>Call Console</i> , select the call to escalate. In the <i>Supervisors</i> panel, click Escalate or click an available supervisor and click Escalate for that supervisor. In the <i>Call Console</i> , move the mouse over the call to the supervisor and click Transfer before the supervisor answers the call.
Escalate with Consultation	In the <i>Call Console</i> , select the call to escalate. In the <i>Supervisors</i> panel, click Escalate or click an available supervisor and click Escalate for that supervisor. Consult with the supervisor. When ready to transfer, in the <i>Call Console</i> , move the mouse over the call to the supervisor and click Transfer .
Escalate with Conference	In the <i>Call Console</i> , select the call to escalate. In the <i>Supervisors</i> panel, click Escalate or click an available supervisor and click Escalate for that supervisor. In the <i>Call Console</i> , move the mouse over the new call and click Conference .

Function	Steps
Start Three-Way Conference	In the <i>Call Console</i> , select a call. Move the mouse over a call that is not selected and click Conference .
Add Participant to Conference	In the <i>Call Console</i> , move the mouse over a call and click Conference .
Hold Conference	In the <i>Conference Call</i> panel, click Hold .
Resume Conference	In the <i>Conference Call</i> panel, click Resume .
Hold Conference Participant	In the <i>Conference Call</i> panel, select the call to put on hold and click Hold for that call.
Take Conference Participant Off Hold	In the <i>Conference Call</i> panel, select a held call and click Resume for that call.
Leave Conference	In the <i>Conference Call</i> panel, click Leave Conference .
End Participant	In the <i>Conference Call</i> panel, select the target call and click End .
End Conference	In the <i>Conference Call</i> panel, click End Conference .
Set Outbound CLID	In the <i>Dialer</i> , click the Outbound CLID button and select the number to use as your calling line identity for the next call from the list.
Dial Ad Hoc Number	In the <i>Dialer</i> , enter the number to call and click Dial .
Re-dial Recent Number	In the <i>Dialer</i> , click Redial and select a number from the list.
Dial Recent Number	In the <i>Dialer</i> , start entering the number to dial. A list of numbers starting with the entered digits appears. Select a number from the list and click Dial .
Dial Contact	In the <i>Contacts</i> pane, click the contact and then click Call for that contact.
Dial from History	In the <i>Call Console</i> , click the Call History button. Select <i>Missed calls</i> , <i>Received calls</i> , or <i>Dialed calls</i> from the drop-down list. In the <i>Call History</i> dialog box, move the mouse over a call log and click Call .
Dial from Search	In the <i>Search</i> panel, select a contact and click Dial .

5.2 Drag and Drop Call onto Contact

In Call Center, you can drag a call from the Call Console and drop it on a target contact in one of your contact directories. This provides you with a quick way to perform operations on calls that involve a contact.

As the call is dragged, a green icon is displayed. When the call is dropped onto a contact, no action is taken on the call. The target contact expands and you can select the action button for the operation you want to perform on that call.

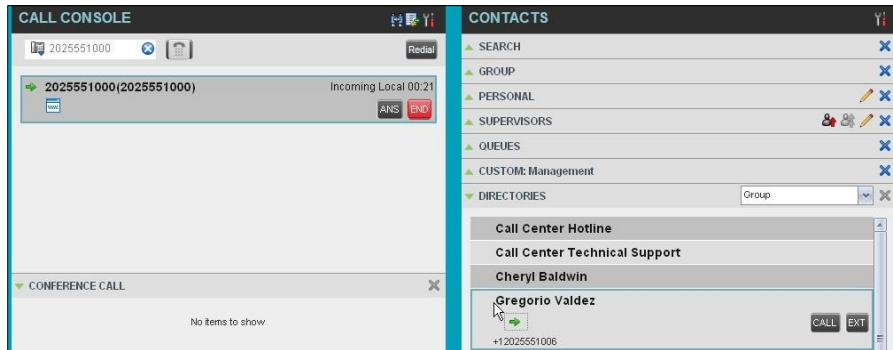


Figure 35 Dragging Call and Dropping on Contact

5.3 View Calls

You can view your current calls and your past calls (Call History). For information about Call History, see section [6 Manage Call History](#).

5.3.1 View Current Calls

Your current calls are displayed in the *Call Console* with the calls involved in a conference displayed in a separate pane called *Conference Call*.

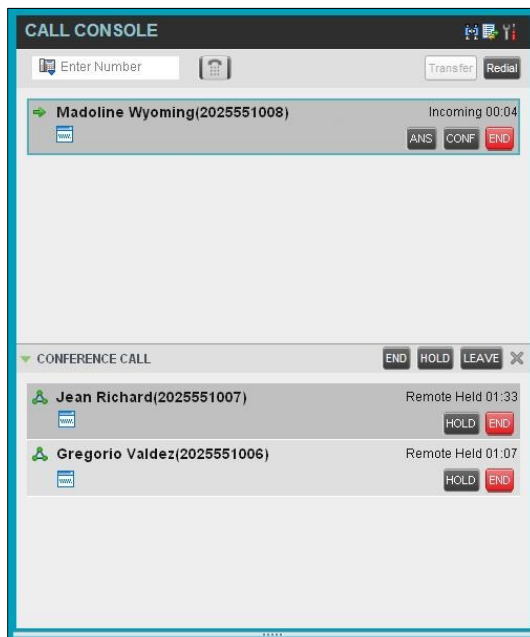


Figure 36 Call Console – View Current Calls

5.3.2 View Incoming Call Details

When the Call Notification feature is enabled, a *Call Notification* pop-up window appears on top of the system tray when you receive an inbound call.

- For calls to your direct number or extension, the following information is displayed:
 - Calling party name
 - Calling party number

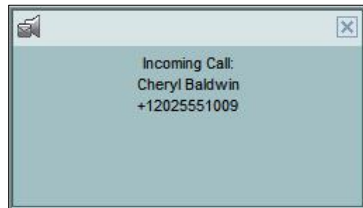


Figure 37 Call Notification Pop-up Window for Call that is Not ACD Call

- For calls from a call center, the following information is displayed:
 - Calling party name
 - Calling party number
 - Call center name or DNIS name, followed by the time the call has been waiting in queue (wait time)
 - Number of calls in queue (queued calls)



Figure 38 Call Notification Pop-up Window for ACD Call

NOTE 1: You must have only one tab open in the browser running Call Center to receive call notifications.

NOTE 2: If calls come within eight seconds of each other, the *Call Notification* pop-up window only appears for the first call of that series.

NOTE 3: If the *Call Notification* pop-up window is still not appearing update the current version of Java on the local computer.

5.4 Assign Disposition Codes (Premium Call Center)

Disposition codes are additional attributes that can be applied to ACD calls to tag calls with comments, results, and so on. More than one disposition code can be assigned to a call.

You can assign disposition codes to current ACD calls or to the latest released ACD call while you are in the *Wrap-Up* state.

5.4.1 Assign Disposition Codes to Current Call

To assign a disposition code to a current call:

- 1) From the *Call Console*, select the call and click it. The call line displays the *Disposition* drop-down list.

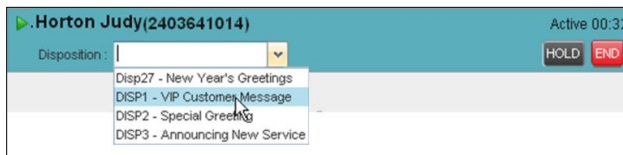



Figure 39 Call Console – Assigning Disposition Code to Active Call

- 2) From the list, select a code.

5.4.2 Assign Disposition Codes in Wrap-Up

While you are in *Wrap-Up*, you can assign disposition codes to the last released ACD call.

To assign a disposition code to the last released call:

- 1) In the *Call Console*, click **Disposition Code** .
- 2) From the drop-down list that appears, select a code.

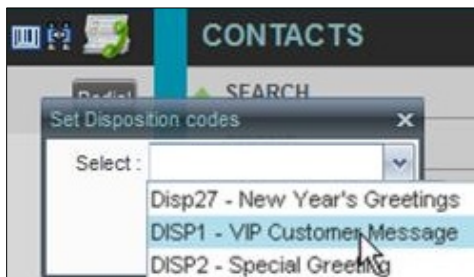


Figure 40 Call Console – Assigning Disposition Code in Wrap-Up

5.5 Receive, Answer, and End Calls

You can answer calls manually or have your phone automatically answer incoming calls.

5.5.1 Answer Call

NOTE: When using the Remote Office service, the Answer button is disabled.

To answer a ringing call:

Click **Answer**  for that call.

To answer an incoming call from a *Call Notification* pop-up window:



Click anywhere on the text in the pop-up window.

5.5.2 Auto Answer Calls

This feature is typically used by agents who use headsets with their phones and take care of a high volume of calls. It may be enabled either by you in the client or configured in the system by your administrator.

NOTE: Auto Answer only works if your device is compliant with Advanced Call Control (ACC).

To answer calls automatically:

In the *Call Console*, click **Auto Answer** . The button changes to this  to indicate that Auto Answer is on.

When Auto Answer is enabled, your phone automatically goes off-hook when it is alerted. This applies to both inbound and Click-To-Dial calls.

The Auto Answer feature may be enabled manually in the Call Center client or by the administrator in the Hosted VoIP Phone System Admin Portal.


NOTE: If this feature is enabled by your administrator, you must **not** enable the client-based Auto Answer using the Auto Answer button.

5.5.3 Open URL

For any current call, you can open a page in your browser that contains information about the calling party encoded in its URL. This can be done either from the *Call Notification* pop-up window that appears on top of the system tray for an incoming call or from the *Call Console* for any current call.

This feature is configured on the *Settings – General* configuration page. For more information, see section [13.1.4 Screen Pop](#).

To open a URL for an incoming call:

In the *Call Notification* pop-up window, click the **Web Pop URL** button .

To open a URL for any call:

In the *Call Console*, click the **Web Pop URL** button  for the target call.

5.5.4 Save vCard

When you receive a call, a *Call Notification* pop-up window appears on top of the system tray. You can click a button in this window to save the caller's phone number and personal information as a vCard in Microsoft Outlook.

To save a vCard:

In the *Call Notification* pop-up window, click the **Add vCard** button . This button is only present when Outlook is running.

5.5.5 End Call

To end a call:

Click **End**  for that call.

5.6 Make Outbound Calls

You can make calls to an ad hoc number, to a contact from any of your contacts' directories, or to a number from Call History. You can also specify the calling line identity to use for your outbound calls.

5.6.1 Set Your Outgoing Calling Line Identity (Premium Call Center)

You can specify whether your direct number or a DNIS number assigned to one of your call centers should be used as your calling line identity when you make calls. This allows you to conduct outbound calling campaigns with an appropriate calling line identity presented to the called party.

To set your outgoing call identity for the next call:

In the *Dialer*, click the **Outbound CLID** button  and select the number from the drop-down list. The number you select is displayed as your CLID when you make the next call.



Figure 41 Dialer – Setting Outbound CLID


5.6.2 Dial Ad Hoc Number

You use the *Dialer*, located at the top of the *Call Console*, to place a call to an ad hoc number.



Figure 42 Dialer – Dialing Ad Hoc Number

To dial an ad hoc number:

In the *Dialer*, enter the phone number and click **Dial** . The client issues a Click-To-Dial attempt to the specified phone number and the call appears in the *Call Console*.

5.6.3 Redial Number

Call Center keeps up to ten most recently dialed numbers, which you can redial using the *Dialer*.

To redial one of the recently dialed numbers:

- 1) In the *Dialer*, place the cursor in the text box and start entering a number. A list of recently called numbers that start with the entered digits appears.

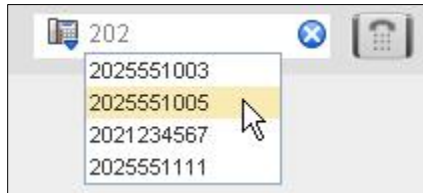



Figure 43 Dialer – Select Recently Dialed Number

- 2) Select the number to dial and click **Dial** .

The client issues a Click-To-Dial attempt to the selected number.

Alternatively, click the **Redial**  button and select the number from the list that appears.

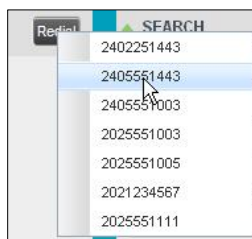


Figure 44 Dialer – Redialing Number

5.6.4 Dial Contact

You can use any directory in the *Contacts* pane to dial a contact.

To dial a contact:




- 1) In the *Contacts* pane, expand the directory from which you want to dial a contact.
- 2) Click the target contact to expand it and click **Call**  for that contact.



Figure 45 Group Panel – Expanded Contact with Action Buttons

Alternatively, to dial the contact's extension, click **Extension**  or to dial the contact's mobile number, click **Mobile** .

The client issues a Click-To-Dial attempt to the specified phone number and the call appears in the *Call Console*.

5.6.5 Dial from Search

You use the *Search* panel in the *Contacts* pane to search for contacts in your contacts' directories. For more information, see section [8.3 Search for Contacts](#).

To dial a number from search:


- 1) Perform a search.
- 2) Click the target contact to expand it and then click **Call** .



Figure 46 Dial From Search

5.6.6 Dial from History

You can dial any number that is available in Call History.

To dial from Call History:

- 1) In the *Call Console*, click **Call History** . The *Call History* dialog box appears.

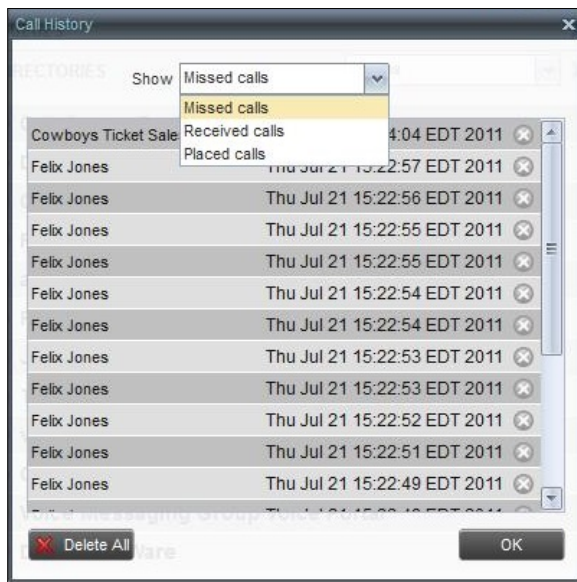



Figure 47 Call History Dialog Box

- 2) From the *Show* drop-down list, select *Missed Calls*, *Received Calls*, or *Placed Calls*.
- 3) Click the call log from which you want to dial and then click the **Call**  button.

5.7 Place Calls on Hold, Resume, and Camp Calls

You can only put an active call on hold.

NOTE: When using the Remote Office service, the Hold/Resume buttons are disabled.

5.7.1 Place Call on Hold

To place a call on hold:

Click **Hold**  for the target call.

5.7.2 Resume Held Call

To resume a held call:

Click **Answer**  for the target call.


5.7.3 Conduct Busy Camp On

Busy Camp On allows you to find a temporary parking place for a call by placing the call on hold for a busy contact. The call is automatically transferred to the destination when the contact becomes available. A call to camp must be active or held and the destination contact's phone state must be either *Busy* or *Ringling*.

If the camped call is not answered within the predefined time, the call is recalled and reappears in your *Call Console*.

Agents can camp calls on monitored contacts in their *Supervisors* directory and supervisors can camp calls on monitored contacts in their *Agents* directory. For information on monitoring agents, see section [9 Manage Agents](#).

To camp a call on a busy contact:

- 1) From the *Call Console*, select an active or held call.
- 2) In your *Supervisors* or *Agents* directory, select the contact to camp the call on. The contact's phone state must be *Busy* or *Ringling*.
- 3) Move the mouse over the contact and click **Camp** .

Once the call is camped, it is removed from the *Call Console*.

If the camped call timer expires before the call is answered, the call reappears in the *Call Console*.

5.8 Transfer Calls


There are a number of ways in which you can transfer a call, including blind transfer, transfer with consultation, and transfer to queue.

5.8.1 Blind Transfer


Use this method to transfer a call to another number without providing an introduction to the destination party. Calls may be transferred this way while active, held, or ringing (in) on your phone. In the latter case, the system redirects the call before it is answered.

To blind transfer a call to an ad hoc number:

- 1) From the *Call Console*, select the call to transfer.

- 2) In the *Dialer*, enter the destination number and click **Transfer** . The call is transferred and removed from the *Call Console*.


To blind transfer a call to a contact:

- 1) From the *Call Console*, select the call to transfer.
- 2) In the *Contacts* pane, expand the directory from which you want to select a contact.
- 3) Click the destination contact and click **Transfer**  for that contact. The call is transferred and removed from the *Call Console*.

5.8.2 Transfer with Consultation

Use this method to transfer a call with an introduction to the destination party. Calls may be transferred this way while active, held, or ringing (in) on your phone. In the latter case, the system redirects the call before it is answered.


To transfer a call with consultation:

- 1) Make a call to the person to whom you want to transfer the call. If the first call was active, it is put on hold.
- 2) Wait until the called party accepts your call and speak to the party.
- 3) When ready to transfer, from the *Call Console*, select one of the two calls.
- 4) Move the mouse over the call that is not selected and click **Transfer** . The calls are connected and removed from the *Call Console*.

5.8.3 Transfer to Queue

You can transfer a call back to a queue. A transferred call is placed at the bottom of the queue.

To transfer a call to a queue:

- 1) From the *Call Console*, select the call to transfer.
- 2) In the *Contacts* pane, expand the *Queues* panel.
- 3) Click the destination queue and click **Transfer**  for that queue. The call is transferred to the selected queue and removed from the *Call Console*.

Alternatively, drag the call onto the target queue and click **Transfer**  for that queue.

5.9 Manage Conference Calls

You manage conferences in the *Call Console*. You use the:

- Current calls area to establish a conference and add participants to it.
- *Conference Call* panel to manage or end an active conference call.

You can only have one active conference at a time.



Figure 48 Call Console – Conference Call Panel

NOTE: To start conference calls, you must have the Three-Way Call or N-Way Call service assigned.

5.9.1 Start Three-Way Conference

To start a conference call, you must have at least two current calls. The calls can be received or made by you. If required, make calls using any of the methods described in section [5.6 Make Outbound Calls](#).

To start a conference:

- 1) In the *Call Console*, select a call.



Figure 49 Call Console – Starting Conference Call


- 2) Move the mouse over a call that is not selected and click **Conference** . A Three-Way Conference is established and the connected calls appear in the *Conference Call* panel.




Figure 50 Conference Call Panel – Conference Call

5.9.2 Add Participant to Conference


NOTE: To add participants to a conference, you must have the N-Way Calling service assigned.

To add a participant to a conference:

- 1) If the call you want to add to the conference is not yet established, place the call.
- 2) In the *Call Console*, move the mouse over the call and click **Conference** . The call is added to the conference.

5.9.3 Hold Conference

To put an active conference on hold:

In the *Conference Call* panel, click **Hold Conference** . This allows other conference participants to continue their conversation.


5.9.4 Resume Conference

To resume a conference call that you previously put on hold:

In the *Conference Call* panel, click **Resume Conference** . All the calls in the conference become active.


5.9.5 Hold Participant

To put a specific conference participant on hold:

- 1) Expand the *Conference Call* panel.
- 2) Move the mouse over the target call and click **Hold** .

5.9.6 Take Participant Off Hold

To resume a participant's held call:

- 1) Expand the *Conference Call* panel.
- 2) Move the mouse over the target call and click **Answer** .

5.9.7 Leave Conference


To leave the conference:

In the *Conference Call* panel, click **Leave Conference** . The other parties continue their conversation.

NOTE: This function is only available for Three-Way Conferences.

5.9.8 End Participant

To end a selected call in a conference:

- 1) Expand the *Conference Call* panel.
- 2) Move the mouse over the call and click **End** .

5.9.9 End Conference

To end the conference:

In the *Conference Call* panel, click **End Conference** . This releases all the calls that participated in the conference.

6 Manage Call History


Call Center collects call logs for your placed, received, and missed calls. You can call any number available in Call History. For information on making calls from Call History, see section [5 Manage Calls](#).

This section explains how to view and delete call logs.

6.1 View Call History

You can view your placed, received, and missed calls.

To view your call history:

- 1) In the *Call Console*, click **Call History** . The *Call History* dialog box appears displaying your past calls. The calls are grouped into placed, received, and missed calls. By default, missed calls are displayed.

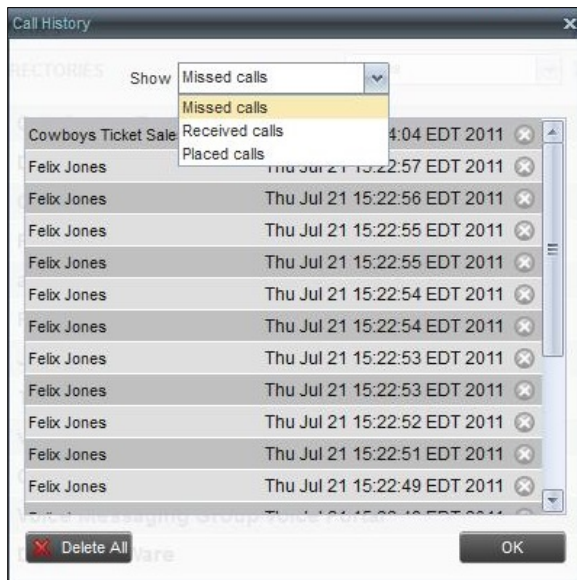





Figure 51 Call History Dialog Box

- 2) To show calls in a specific group, select that group from the *Show* drop-down list.

6.2 Delete Call History

If your organization's Call Center configuration allows, you can delete a selected call log or all call logs from Call History.

To delete calls from Call History:

- 1) In the *Call Console*, click **Call History** . The *Call History* dialog box appears.
- 2) To delete all call logs, click **Delete All** .
- 3) To delete a selected log, move the mouse over the log and click **Delete** .


7 E-mail Contacts

Call Center allows you to send an e-mail message to a contact that has e-mail configured on the system. You must also have messaging enabled within Call Center settings. For information, see section [13.5 Settings – Messaging](#).

The **EMAIL** button appears when you select a contact that has an e-mail address configured.

7.1 Send E-mail Message to Contact

To send an e-mail message to a contact:

- 1) In the *Group/Enterprise* directory, move the mouse over a contact who has e-mail.
- 2) Click **EMAIL** . This brings up a new e-mail window for the configured Messaging service.
- 3) Write your message and click **Send**.

8 Manage Contacts

You use the *Contacts* pane to perform call and monitoring operations on your contacts as well as to manage your contacts' directories.



Figure 52 Contacts Pane

Call Center provides access to the contacts' directories listed in the following table.

Interface Element	Description
Enterprise/Group	The <i>Enterprise/Group</i> directory contains the contacts in your group or enterprise directory.
Common	The <i>Common</i> directory contains the contacts in the common phone list configured by your administrator on the Hosted VoIP Phone System Admin web portal.
Personal	The <i>Personal</i> directory contains all contacts in your Personal Phone List on the Hosted VoIP Phone System User web portal.
Agents	The <i>Agents</i> directory, available only to supervisors, contains the list of agents you supervise and allows you to manage them and view their phone and ACD state.
Speed Dial	The <i>Speed Dial</i> directory contains the numbers configured for you or by you for your Speed Dial services (Speed Dial 8 and/or Speed Dial 100).

Interface Element	Description
Queues	The <i>Queues</i> directory lists the call centers and associated DNIS numbers for the call centers you are either supervising or staffing. It allows you to transfer calls to queues quickly.
Custom	A <i>Custom</i> directory contains selected contacts from your Hosted VoIP Phone System Admin group or enterprise directory. You can have access to zero, one, or several custom directories. Custom directories are configured by your administrator.
Outlook	The <i>Outlook</i> directory contains your Outlook contacts.
LDAP (Search Access Only)	Call Center provides search access to a configured <i>LDAP</i> directory. When you make a search on the <i>LDAP</i> directory and your search returns results, these results are displayed in the <i>Search</i> panel (in the <i>Contacts</i> pane). By default, no LDAP contacts are displayed in the <i>Contacts</i> pane.

Access to certain directories depends on your permissions and the system setup. For information, contact your administrator.

The *Contacts* pane also contains the *Directories* panel, which consolidates the contacts from the following directories: *Enterprise/Group*, *Custom*, *Personal*, *Outlook*, and *Speed Dial*. The *Contacts* pane is always visible. You can choose which directories to display in the *Directories* panel and you can collapse the panel, but you cannot close it.

For information about the operations you perform to manage your contact directories, see the following sections:

- [View Contacts](#)
- [Organize Contacts](#)
- [Search for Contacts](#)
- [Manage Personal Contacts](#)
- [Manage Speed Dial Numbers](#)

8.1 View Contacts

Call Center allows you to select directories to display in the *Contacts* pane and below the *Call Console*, show or hide directory contents, and select the order of appearance for information in certain directories.


8.1.1 Show or Hide Directories


You can decide which of the directories that you are allowed to access appear in the *Contacts* pane.

All directories can be displayed individually in the *Contacts* pane.

In addition, you can decide which directories to display in the *Directories* panel (on their own or with other directories), and below the *Call Console*.

To show or hide a directory in the *Contacts* pane:

- 1) In the *Contacts* pane, click **Options** .
- 2) Select *View, Directories*, and then select or unselect the directory to display/hide. To display all directories, select *All*.

To hide a directory, you can also click the **Close** button  for that directory.

NOTE: You cannot close the *Directories* panel.

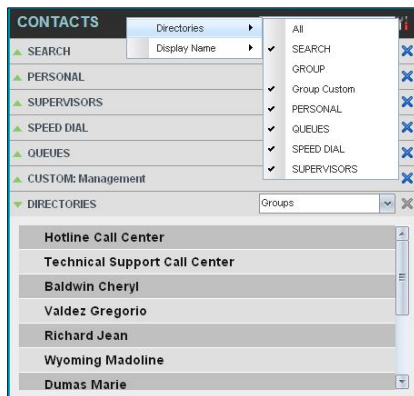


Figure 53 Contacts Pane – Show/Hide Contact Directories

To show a directory in the *Directories* panel:

In the *Directories* panel, select the directory to display from the drop-down list. To display all directories, select *Show all*.

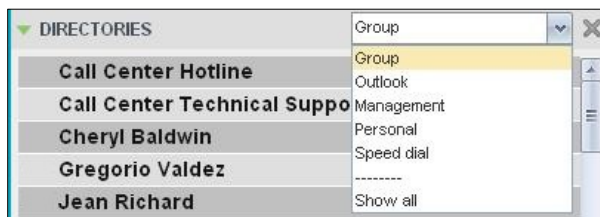


Figure 54 Directories Panel – Selecting Directory to Display


8.1.2 Display Directory Below Call Console

To display a directory below the Call Console:

- 1) In the *Directories* panel, select *Show all*.



Figure 55 Directories Panel – Selecting Directory

- 2) Click the **Pullout Directory** button  for the directory to display. The directory appears below the *Call Console*.

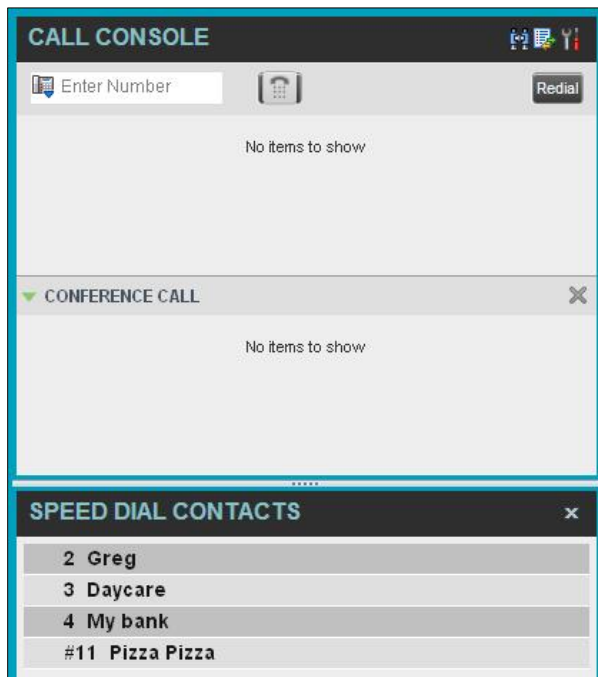



Figure 56 Custom Directory Displayed Below Call Console

To close the directory, click the **Close** button .

8.1.3 Show or Hide Directory Content

By default, your directories are collapsed, with only the title bar visible. You can selectively expand the directories that you want to consult or use.

To show or hide contacts in a directory:

In the *Contacts* pane, click the **Expand/Collapse**  button for that directory.



Figure 57 Group Panel Expanded

8.1.4 Show Contact Details

You can view the details of a contact in any directory.

To view contact details:

- 1) Expand the target directory.
- 2) Click the contact. The entry expands, displaying the contact's details. The information depends on the target directory and includes the contact's phone numbers or IDs and action buttons.

Only one contact per directory can be expanded at a time. When you click a contact, the system automatically hides the details of the previously expanded contact.



Figure 58 Group Panel – Contact Details

8.1.5 Select Display Order

Contacts in the *Group/Enterprise*, *Agents*, and *Supervisors* directories can be displayed by either their first name or last name first. Your selection applies to all of these directories. You cannot specify the display order for each directory individually.

To specify the contacts' display order:

- 1) In the *Contacts* pane, click the **Options** button .
- 2) Select *View*, then *Display Name*, and then the order in which you want to display the contacts: *Last Name, First Name* -or- *First Name, Last Name*.

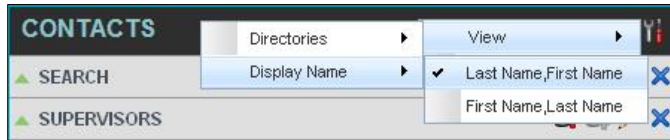


Figure 59 Contacts Pane – Displaying Contacts by First Name, Last Name

Figure 60 shows supervisors displayed by their last name followed by their first name.



Figure 60 Supervisors Panel – Supervisors Listed by First Name, Last Name

8.2 Organize Contacts

8.2.1 Sort Contacts

You can sort contacts in the following directories: *Group/Enterprise*, *Queues*, and *Agents*.

To order contacts in a directory:

- 1) In the *Contacts* pane, click **Options** .
- 2) Select *Sort*, followed by the name of the directory in which you want to sort contacts, and then the sorting option.

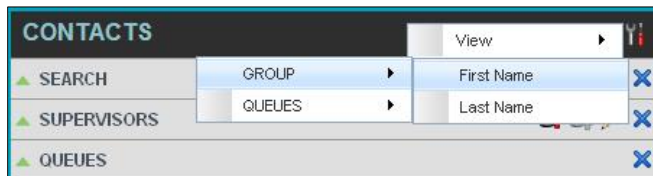


Figure 61 Contacts Pane – Sorting Contacts

Figure 62 shows a *Group* directory sorted by the contact's first name.



Figure 62 Group Panel – Contacts Sorted by First Name

NOTE: When agents are sorted by ACD state and there is a change in an ACD state, the agents are not automatically re-sorted.

8.3 Search for Contacts

Call Center provides you with a search function that allows you to search for specific contacts in your directories.

You use the *Search* panel in the *Contacts* pane to look for contacts.

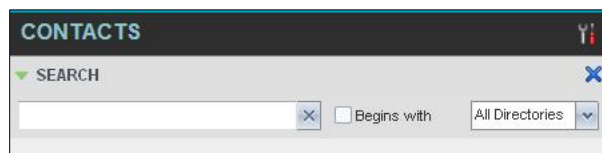


Figure 63 Contacts Pane – Search Panel

8.3.1 Perform Contact Search

To search for contacts:

- 1) In the *Search* text box, enter the text you want to search for and press ENTER. You can enter partial information, such as part of a name or phone number.

For example, if you do not remember whether Mary's last name is spelled "Shelley" or "Shelly", you can enter "Shell", and either name is returned.

- 2) To restrict the search to contacts that start with the entered text, check the *Begins with* box.
- 3) From the drop-down list, select the directories to search.
- 4) Press ENTER.

The text you enter is matched against all attributes of every entry in the selected directories.

NOTE: The search is not case-sensitive; the search for “Ann” and “ann” returns the same results.

Search results are displayed in the *Search* panel, each contact listed with the name of the directory where they were found.

Directories are searched in the following order: Supervisors, Agents, Group/Enterprise. Duplicate search results in directories are not displayed; the first match for a given contact is displayed.

Duplicate search results in other directories are displayed.




Figure 64 Contacts Pane – Search Results

The search returns either all the contacts (in the selected directories) that contain the entered keyword or all the contacts that start with the entered keyword.

In the first case (*Contains*), entering “Ann” and selecting “First Name” from the *Keyword Search Filter* drop-down list returns all contacts with the first name “Ann”, but it also returns all contacts with first names such as “Anne”, “Marianne”, “Marie Ann”, “Ann Marie”, and so on.

In the second case (*Starts With*), entering “Ann” and selecting “First Name” returns all contacts with first names such as “Ann”, “Anne”, and “Ann Marie”, but not “Marianne” or “Mary Ann”.

- 5) To clear the search results, click **Reset** .

NOTE: Contact entries displayed in search results follow the same rules as if that entry was accessed in its own directory. This allows you to perform any operations directly from the search results.

8.4 Manage Personal Contacts

You can add or remove personal contacts via the web portal or in Call Center, and the updates appear in both places. However, the updates that you make via the web portal appear only in Call Center at the next sign-in.


To update personal contacts using the client, perform the following operations:

- [Add Personal Contact](#)
- [Delete Personal Contact](#)

You cannot modify a personal contact entry in Call Center. To modify information for a personal contact, delete the entry and add it again.

8.4.1 Add Personal Contact

To add a personal contact:

- 1) In the *Personal* panel, click **Edit** . The *Edit Personal Contact* dialog box appears.
- 2) Click **Add**. A new line is added below the existing entries, allowing you to define a new entry.

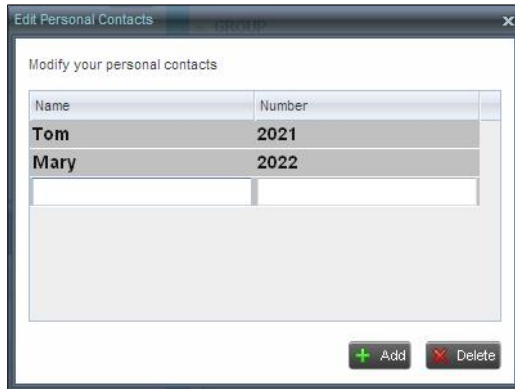



Figure 65 Edit Personal Contact Dialog Box – Adding Entry

- 3) In the *Name* text box, enter the contact's name or description, as you want it to appear on the contact's list.
- 4) In the *Number* text box, enter the phone number of the contact.
- 5) To save the entry, click anywhere in the dialog box outside the entry.

8.4.2 Delete Personal Contact

To delete a speed dial entry:

- 1) In the *Personal* panel, click **Edit** . The *Edit Personal Contact* dialog box appears.
- 2) Select the entry to delete and click **Delete**.

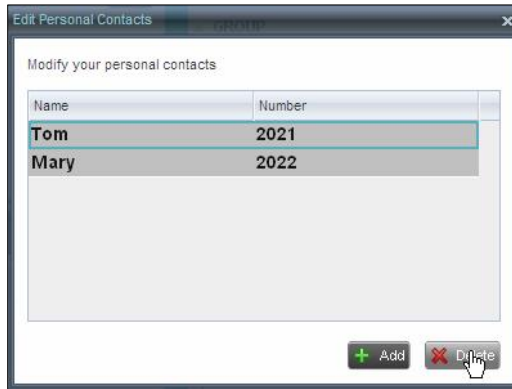


Figure 66 Edit Personal Contact Window – Deleting Entry

8.5 Manage Speed Dial Numbers


You can add or remove speed dial numbers via the web portal or in Call Center, and the updates appear in both places. However, the updates that you make via the web portal appear only in Call Center at the next sign-in.

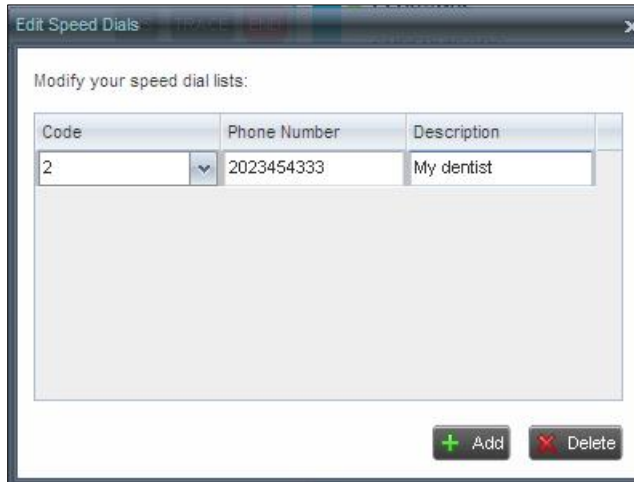
To update speed dial entries using the client, perform the following operations:

- Add Speed Dial Entry
- [Modify Speed Dial Entry](#)
- [Delete Speed Dial Entry](#)

8.5.1 Add Speed Dial Entry

To add a speed dial entry:

- 1) In the *Speed Dial* panel, click **Edit** . The *Edit Speed Dials* dialog box appears.
- 2) Click **Add**. A new line is added below the existing entries, allowing you to define a new entry.



The screenshot shows the 'Edit Speed Dials' dialog box with the following table:

Code	Phone Number	Description
2	2023454333	My dentist


At the bottom of the dialog box, there are two buttons: '+ Add' and '- Delete'.

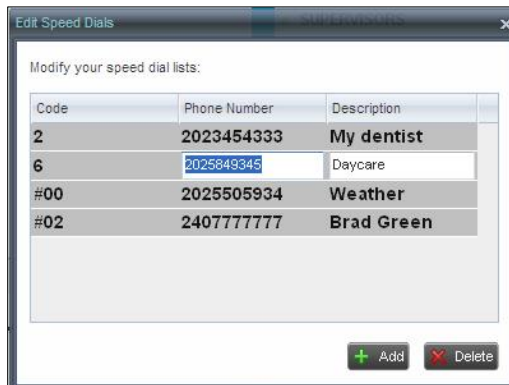
Figure 67 Edit Speed Dials Dialog Box – Adding Entry

- 3) From the *Code* drop-down list, select a speed dial code.
- 4) In the *Phone Number* text box, enter the phone number to assign to the code.
- 5) In the *Description* text box, enter a description that allows you to identify the entry.
- 6) To save the changes, click anywhere in the dialog box outside the entry.

8.5.2 Modify Speed Dial Entry

To modify a speed dial entry:

- 1) In the *Speed Dial* panel, click **Edit** . The *Edit Speed Dials* dialog box appears.
- 2) Double-click the entry to modify. The entry becomes modifiable.



The screenshot shows the 'Edit Speed Dials' dialog box with the following table:

Code	Phone Number	Description
2	2023454333	My dentist
6	2025849345	Daycare
#00	2025505934	Weather
#02	2407777777	Brad Green

At the bottom of the dialog box, there are two buttons: '+ Add' and '- Delete'.


Figure 68 Edit Speed Dials Dialog Box – Modifying Entry

- 3) Modify information as required.

- 4) To save the changes, click anywhere in the dialog box outside the entry.

8.5.3 Delete Speed Dial Entry

To delete a speed dial entry:

- 1) In the *Speed Dial* panel, click **Edit** . The *Edit Speed Dials* dialog box appears.
- 2) Select the entry to delete and click **Delete**.

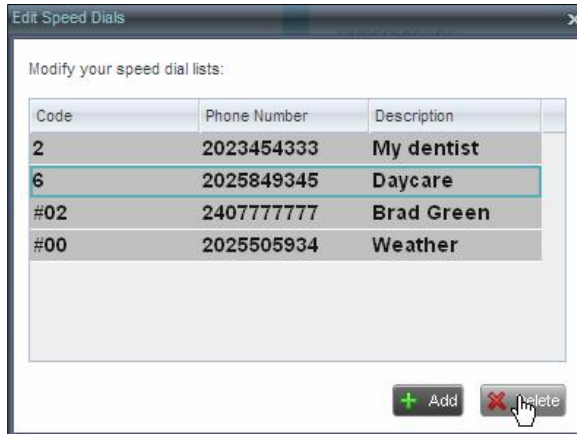


Figure 69 Edit Speed Dials Dialog Box – Deleting Entry

9 Manage Agents

You use the *Agents* panel to view the agents who you are supervising and to perform actions on them. You can also monitor the call and the ACD state of selected agents. For information on selecting agents to monitor, see section [9.1 Select Agents to Monitor](#).



Agent Status	Agent Name	Agent Status
Unavailable	Valdez, Gregorio	Unavailable
Sign-Out	Wyoming, Madoline	Sign-Out
Wrap-Up	Dumas, Marie	Wrap-Up
Sign-Out	Maldini, Paolo	Sign-Out
Wrap-Up	Jones, Shirley	Wrap-Up
Available	Smith, Stan	Available

Figure 70 Agents Panel

9.1 Select Agents to Monitor

Call Center allows you to monitor the call and the ACD state of selected agents, but agents are not automatically monitored. To monitor the state of an agent, you must select the agent.

To select agents to monitor:


- 1) In the *Agents* panel, click **Edit** . The *Edit Monitored Agents* dialog box appears.



Figure 71 Edit Monitored Agents Dialog Box

- 2) Select the check box next to each agent to monitor. If an agent is staffing multiple call centers, by selecting that agent for monitoring in one call center, you are also selecting them for monitoring under all call centers that they are staffing.
- 3) Click **Save**.

The selected agents have their call and ACD state displayed. The state of agents who are not monitored appears as unknown (dimmed).



AGENTS	
<input checked="" type="radio"/>	Valdez, Gregorio Available
<input type="radio"/>	Wyoming, Madoline
<input checked="" type="radio"/>	Dumas, Marie Wrap-Up
<input checked="" type="radio"/>	Maldini, Paolo Sign-Out
<input checked="" type="radio"/>	Jones, Shirley Wrap-Up
<input type="radio"/>	Smith, Stan

Figure 72 Agents Panel – Monitored Agents

The list is saved and is available during subsequent sessions.

9.2 Agent Phone and ACD States

Monitored agents have their phone and ACD state displayed. A single icon, to the left of the agent's name, represents the agent's combined phone and ACD state, which indicates the agent's ability to take calls. In addition, the agent's ACD state is also displayed in text following their name. If the agent's ACD state is set to "Unavailable", the unavailable code is also displayed (if applicable).

Other agents have their state set to "Unknown".



AGENTS	
<input checked="" type="radio"/>	Valdez, Gregorio Available
<input type="radio"/>	Wyoming, Madoline
<input checked="" type="radio"/>	Dumas, Marie Wrap-Up
<input checked="" type="radio"/>	Maldini, Paolo Sign-Out
<input checked="" type="radio"/>	Jones, Shirley Wrap-Up
<input type="radio"/>	Smith, Stan

Figure 73 Agents Panel – Agents with Phone and ACD State Displayed

The possible agent's phone and ACD states are as follows:

Phone State	ACD State	Icon	Description
<i>Idle</i>	<i>Available</i>		Agent's phone is on-hook and the agent is available to take ACD calls.
<i>Ringing</i>	<i>Available</i>		Agent's phone is ringing and the agent is available to take the call.
<i>Any</i>	<i>Unavailable, Sign-In, Sign-Out</i>		Agent is not available to take ACD calls.
<i>Idle, Ringing</i>	<i>Wrap-Up</i>		Agent is performing post call work. They may or may not be available to take calls.
<i>Busy</i>	<i>Available, Wrap-Up</i>		Agent's phone is off-hook, which means that the agent is on a call. Calls may be delivered to agents depending on their call waiting settings and the call center's call waiting and wrap-up settings.
<i>Do Not Disturb</i>	<i>Any</i>		Agent has enabled the Do Not Disturb service. ACD calls are not delivered to agent in the <i>Do Not Disturb</i> call state. This state is not recommended for Call Center agents. Agents should use the <i>Unavailable</i> ACD state when they need to block new incoming calls temporarily.
<i>Call Forwarding Always</i>	<i>Any</i>		Agent has enabled the Call Forwarding Always service.
<i>Private</i>	<i>Any</i>		Agent has enabled phone state privacy.
<i>Unknown</i>	<i>Any</i>		Agent is currently not monitored.

9.3 View Agent's Details

Clicking an agent expands the entry to show all queues the agent is assigned to and all the agent's current calls, in order of arrival.

For each call, the following information is displayed:

- Call number
- Calling name (if available) and calling number (and for direct calls, extension), for example, "Joe Smith +12403645125"
- Call length in the following format: "MM:SS" (or "HH:MM:SS" if the call lasts longer than an hour), for example, "10:22"

For each queue, the following information is displayed:

- Call Center ID
- Whether the agent has joined the queue
- The agent's skill level in that queue, if applicable



Figure 74 Agents Panel – Agent's Details

9.4 Change Agent ACD State

You can force an ACD state change for an agent. This action can only be performed on monitored agents.

To change and agent's ACD state:


- 1) In the Agents panel, click the agent and then click the **ACD State** button .



Figure 75 Agents Panel – Agent ACD States

- 2) From the drop-down list, select the new state.

- 3) If you selected *Unavailable*, you may have to select the reason for their unavailability.

9.5 Silently Monitor Agent's Call


The silent monitor function allows you to listen to monitored agents' calls without being heard. You can listen in on agents who you selected for phone and ACD state monitoring.

NOTE: This function is available if you have the Directed Call Pickup with Barge-in and Call Center Monitoring services assigned.

You can silently monitor one agent at a time, and the agent you monitor must have the Call Center – Premium service assigned.


You can choose to monitor the agent's current call or next incoming call. To monitor the current call, the agent must have exactly one active call.

To listen in on an agent's current call silently:

- 1) In the *Contacts* pane, expand the *Agents* panel and click the agent to monitor. The agent must have exactly one active call.
- 2) Click **Monitor**  for that agent.

A new call is created in the *Conference Call* panel. You are conferenced in to the call and muted (Silent Monitor).

To listen in on an agent's next call silently:

- 1) In the *Contacts* pane, expand the *Agents* panel.
- 2) Click the target agent and click **Monitor Next Call**  for that agent. A monitoring call is established for the selected agent.

When the next call is received and answered by the agent, you are conferenced in to the call and your call is muted. Both calls appear in the *Conference Call* panel.



Figure 76 Silently Monitored Call

To barge in on a call you are silently monitoring:

In the *Conference Call* panel, click **Barge In** . You are conferenced in to the call.


For information on operations that can be performed on conference calls, see section [5.9 Manage Conference Calls](#).

9.6 Barge in on Agent's Call

Supervisor Barge-In allows you to barge in on an agent's call. This is useful when you want to enter an already established call between two other people. You can only barge in on agents who you selected for phone and ACD state monitoring.

NOTE: This functionality is only available if you have been assigned the Directed Call Pickup with Barge-in service.

To barge in on an agent's call:

- 1) In the *Contacts* pane, expand the *Agents* panel and select an agent. The agent must have exactly one active call.
- 2) Click the agent to expand the entry and click **Barge In** . A Three-Way Conference is established.

For information on operations that can be performed on conference calls, see section [5.9 Manage Conference Calls](#).

9.7 Pick Up Agent's Ringing Call


Call Pickup allows you to pick up an unanswered call on behalf of an agent. This is useful when the agent is away or busy.

NOTE 1: This functionality is only available if your group has been assigned the Call Pickup service.

NOTE 2: A call that is retrieved using Call Pickup is treated in the Call Center reports as a direct inbound call to the retrieving party and not as an ACD call, because it was not answered by the agent selected using the ACD process.

NOTE 3: Supervisor Call Pickup is only supported if the agent and supervisor are in the same group. In an enterprise, this function can be disabled.

To pick up an unanswered call for an agent:

- 1) In the *Agents* panel, select an agent whose phone is ringing.
- 2) Move the mouse over the agent and click **Answer** . You are now answering the call, and the call appears in the *Call Console*.

10 Manage Queued Calls

Call Center allows you to manage queued calls in the selected call centers (up to five) and to monitor calls in real time. You use the *Queued Calls* pane to manage queued calls under your supervision.

Section [10.1 Queued Calls Pane](#) describes the *Queued Calls* pane. The rest of this section describes the operations you perform to manage queued calls:

- [Select Call Centers to Monitor](#)
- Show or Hide Call Center Panels
- [View Queued Calls](#)
- [Group Queued Calls](#)
- [Order Queued Calls](#)
- [Monitor Next Call](#)
- [Enable Night Service Override or Forced Forwarding \(Premium Call Center\)](#)
- [Retrieve Call from Queue](#)
- [Promote Call in Queue \(Premium Call Center\)](#)
- [Transfer Call to Another Queue](#)
- [Transfer Call to Top of Queue \(Premium Call Center\)](#)
- [Transfer Call from Queue to Agent](#)
- [Transfer Call to Ad Hoc Number](#)
- [Change Position of Call in Queue](#)

10.1 Queued Calls Pane

You use the *Queued Calls* pane to manage queued calls.




The *Queued Calls* pane displays the monitored call centers and lists the calls queued in each call center. For information about selecting call centers to monitor, see section [10.2 Select Call Centers to Monitor](#).

Each call center is displayed in a separate panel. The panel's header provides the following information and controls:


- Call center name – The name of the call center.
- Call center number – The primary phone number of the call center.





Figure 77 Queued Calls Pane

- Service Mode button  – This identifies the service mode of the supervised call center. Clicking the button launches the *Edit Queued Calls Favorites* dialog box and allows you to activate Night Service Override or Forced Forwarding. The call center can be in one of the following service modes:
 - *Night Service*  – The call center is processing calls according to the *Night Service* schedule and policy.
 - *Night Service Override*  – The call center has been manually forced to follow the *Night Service* policy.

NOTE: The *Night Service* or *Night Service Override* mode appears only if the *Night Service* policy is triggered. It is triggered either by the *Night Service* schedule or by a manual override, and if the action to apply to incoming calls is set by a Hosted VoIP Phone System administrator to either *Perform busy treatment* or *Transfer to phone number/SIP-URI*. Setting the action to “None” acts as if the *Night Service* policy was not triggered, and as a result, the *Night Service/Night Service Override* mode is not displayed.

- *Holiday Service*  – The call center is processing calls according to the *Holiday Service* schedule and policy.


NOTE: The *Holiday Service* mode appears only if the *Holiday Service* policy is triggered and if the action to apply to incoming calls is set by an Hosted VoIP Phone System administrator to either *Perform busy treatment* or *Transfer to phone number/SIP-URI*. Setting the action to “None” acts as if the *Holiday Service* policy was not triggered, and as a result, the *Holiday Service* mode is not displayed.




- *Forced Forwarding*  – All calls to this call center are forwarded to a specified destination.
- *Normal*  – Call center is in normal mode of operation; none of the above modes is enabled.
- Ratio of visible calls to display limit – This is the number of calls in the queue that are currently displayed against the maximum number of calls that can be displayed for a queue.
- Ratio of queued calls to queue length – This is the number of calls in queue against the queue length that is displayed.

When you expand the panel for a call center, the list of calls queued in that call center appears.

By default, calls are listed according to their position in the queue, with the oldest call first. They can be grouped by the priority bucket. For more information, see section [10.6 Group Queued Calls](#).

The following information is provided for each call:

- Call Status icon – A graphic representation of the state of the queued call:
 - *Waiting*  – The call is queued, waiting to be answered.

- *Announcement*  – An entrance announcement or music is being played to the caller.
- *Reordered*  – The position of the call in the queue has been changed.
- *Bounced*  – The call has been bounced.
- Caller's identity – The name (if available) and the phone number of the calling party.
- Call time – The total call time, including the time in the current queue (in parentheses).

Clicking a call expands the call to show additional data:

- Priority – The priority bucket of the call. (Premium Call Center)
- Position – The position of the call in the queue.
- Destination – The name (if available) and the phone number of the call center (or DNIS, when applicable) that was called.

When the call is expanded, the action buttons for actions that can be performed on the call appear. For the list of action buttons available in Call Center, see section [4.5.1 Call Action Buttons](#).

10.2 Select Call Centers to Monitor

You can select up to five call centers to monitor. You view the monitored call centers in the *Queued Calls* pane.

To select call centers to monitor:

- 1) In the *Queued Calls* pane, click **Options**  and select the *Edit Queue Favorite Dialog* option.

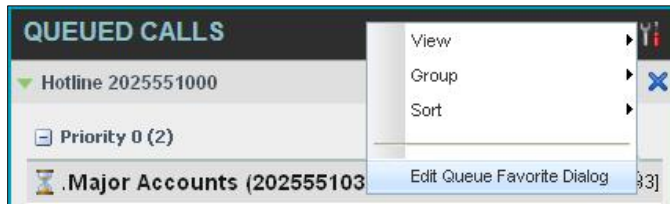


Figure 78 Queued Calls – Options – Edit Queue Favorite Dialogue

The *Edit Queue Favorites* dialog box appears.

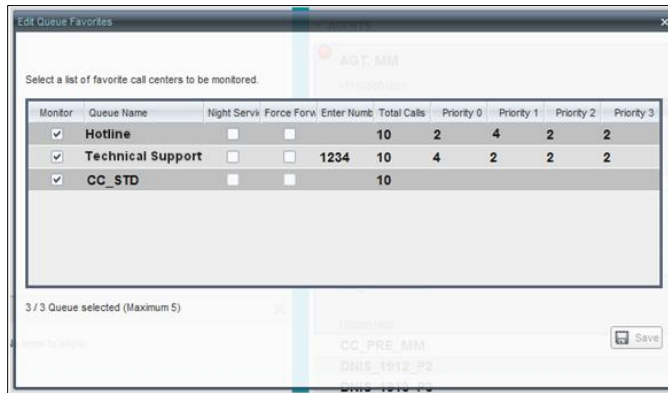



Figure 79 Edit Queue Favorites Dialog Box


- 2) Select the *Monitor* check boxes in the rows of the call centers to monitor.
- 3) Click **Save**.

NOTE: Clicking the Close button  in a call center panel in the *Queued Calls* pane, closes the panel but does not stop monitoring the call center.

To stop monitoring a call center, deselect the *Monitor* check box for the call center in the *Edit Queue Favorites* dialog box.

10.3 Modify Number of Calls to Display (Premium Call Center)

For each call center you can modify the maximum number of calls that can be displayed in each priority bucket. The total number of calls to display for a call center cannot exceed 50.

- 1) In the *Queued Calls* pane, click **Options**  and select the *Edit Queue Favorite Dialog* option. The *Edit Queue Favorites* dialog box appears.
- 2) For each Standard call center you are monitoring, set the total number of calls to display.
- 3) For each Premium call center you are monitoring, set the number of calls to display in each priority bucket. The total number of call in all priority buckets cannot exceed 50.

10.4 Show or Hide Call Center Panels

You can show or hide call center panels for monitored queues.

To show/hide call center panels:

- 1) In the *Queued Calls* pane, click **Options** .
- 2) Select *View* and then select or unselect the names of the call centers. To show or hide all call centers, select or deselect *All*.

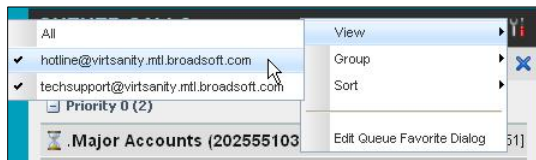


Figure 80 Queued Calls – Options – View

Alternatively to hide a call center, click the **Close** button . The call center is removed from the display but continues to be monitored.

10.5 View Queued Calls

You can selectively expand or collapse call center panels to show or hide calls in the monitored call centers.

To view queued calls for a call center:

Click the *Expand*  button for that call center.


To view call details of a selected call:

Click that call.

10.6 Group Queued Calls

You can group queued calls by their priority bucket.

To group or ungroup queued calls:

- 1) In the *Queued Calls* pane, click **Options** .
- 2) From the drop-down list, select *Group*, and then select or deselect *Group by Priority*. This action applies to all monitored call centers.

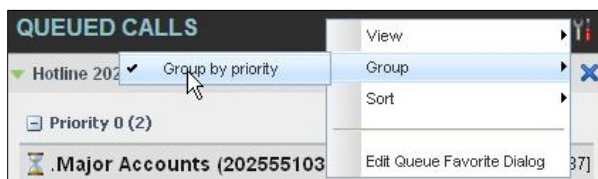



Figure 81 Queued Calls – Options – Group

- 3) To ungroup calls, unselect the *Group by Priority* option.

10.7 Order Queued Calls

Queued calls can be ordered according to their total waiting time or their waiting time in the current priority bucket.

To order queued calls:

- 1) In the *Queued Calls* pane, click **Options** .
- 2) Select *Sort* and then the ordering option you want. This operation applies to all monitored call centers.

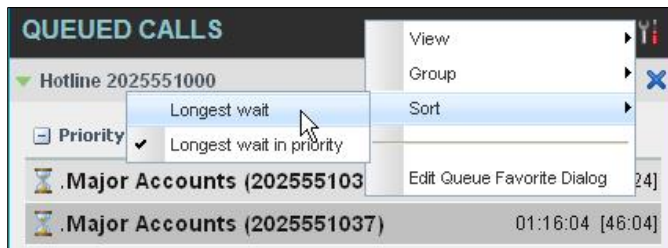


Figure 82 Queued Calls – Options – Sort


NOTE: The ordering does not work when calls are grouped. If required, first ungroup the calls.

10.8 Monitor Next Call

You can silently monitor the next call that is received by a call center.

NOTE: To use this feature, you must have the Call Center Monitoring service assigned.

To monitor the call center's next call:

- 1) In the *Contacts* pane, expand the *Queues* panel and click the target call center to expand it.
- 2) Click the **Monitor Next Call** button  for that call center. A monitoring call is established for the selected call center.

When the next call is received and answered by an agent, you are conferenced in to the call and your call is muted. Both calls appear in the *Conference Call* panel.

To barge in on a call you are silently monitoring:


In the *Conference Call* panel, click **Barge In** . You are conferenced in to the call.

For information on operations that can be performed on conference calls, see section [5.9 Manage Conference Calls](#).

10.9 Enable Night Service Override or Forced Forwarding (Premium Call Center)

Call Center allows you to manually override the current mode of operation and enable the Night Service and/or Forced Forwarding of calls for selected call centers.

To enable Night Service Override and/or Forced Forwarding:

- 1) In the *Queued Calls* pane, click the **Service Mode** button  in the panel for one of the call centers. The *Edit Queue Favorites* dialog box appears.

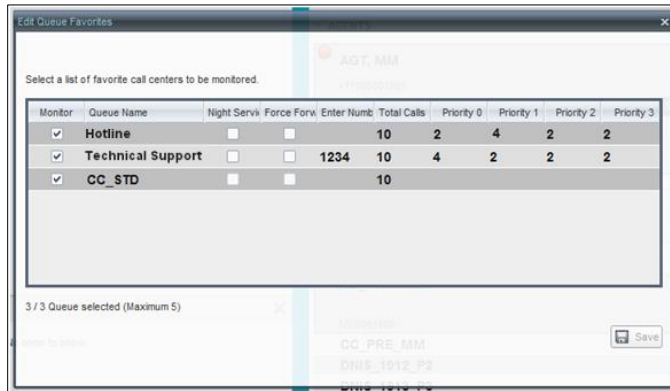


Figure 83 Edit Queue Favorites Dialog Box


- 2) For each call center for which you want to override the time schedule and manually initiate Night Service, check the *Night Service Override* check box.
- 3) For each call center for which you want to divert calls to a specified destination temporarily, check the *Force Forwarding* box and enter the phone number to which to forward the calls in the *Enter Number* box.

NOTE: Night Service Override has precedence over Forced Forwarding.

10.10 Retrieve Call from Queue

You can retrieve queued calls from the queue to your phone device.

To retrieve a call from a queue:

Click the call in the *Queued Calls* pane and click **Retrieve**  for that call.


Once you retrieve a call, the call appears in the *Call Console* and you treat it as any other call. For example, you can transfer it to an ad hoc number or to another queue. For more information, see section [5 Manage Calls](#).

10.11 Promote Call in Queue (Premium Call Center)

A priority is attached to an incoming call based on the DNIS number on which it is received. Calls are distributed to the agents staffing the queue based on this priority, with calls of the higher priority being exhausted before calls in the next priority are distributed.

You can manually promote calls from a lower priority bucket to a higher priority bucket. A manually promoted call ends up as the last call in the higher priority bucket with a wait time of zero seconds.


To promote a call, that is to change its priority:

- 1) In the *Queued Calls* pane, expand a *Call Center* panel.
- 2) Click the call you want to promote and click **Promote**  for that call.

The queued call is promoted to the end of the next highest priority bucket.


10.12 Transfer Call to Another Queue

To transfer a queued call to another queue:

- 1) In the *Queued Calls* pane, select the call to transfer.
- 2) In the *Contacts* pane, expand the *Queues* panel.
- 3) Click the target queue and click **Transfer**  for that queue.
The call is transferred and removed from the queue.

10.13 Transfer Call from Queue to Agent

To transfer a call from a queue to an agent:

- 1) In the *Queued Calls* pane, select the call to transfer.
- 2) In the *Contacts* pane, expand the *Agents* panel.
- 3) Click the target agent and click **Transfer**  for that agent.
The call is transferred and removed from the queue.

10.14 Transfer Call to Ad Hoc Number

To transfer a call to an ad hoc number:


- 1) In the *Queued Calls* pane, select the queued call.
- 2) In the *Dialer*, enter the destination number and click **Transfer** .



Figure 84 Ad Hoc Queue Transfer

The call is transferred and removed from the queue.

10.15 Change Position of Call in Queue


You can reorder a queued call in a Standard call center or in the “0” priority bucket in a Premium call center.

To change a call’s position in a queue:

- 1) In the *Queued Calls* pane, click the target call to expand it.



Figure 85 Reordering Queued Call

- 2) Click **Reorder**  and select the new position in the queue from the list that appears.
The call is placed in the new position.

NOTE 1: You cannot place a call ahead of a bounced call.

NOTE 2: The list can contain a maximum of 24 reorder positions, which you can choose from to reorder a call in queue, in addition to *Send to Back* and *Sent to Front* options.

10.16 Transfer Call to Top of Queue (Premium Call Center)

If your administrator has configured the call center with the Transfer to Top feature, follow this procedure to transfer the call to the top of the queue.

You can only transfer a call to the top of the highest priority bucket (bucket with priority "0").

There need to be at least two calls in the target queue.


- 1) In the *Queued Calls* pane, click the target call to expand it.
- 2) Click **Reorder**  and select *Send to Front* from the list that appears.



Figure 86 Transferring Call to Top of Queue

11 View Real-Time Statistics

Call Center provides you with real-time information about supervised agents and queues. This information is displayed in the Dashboard.

11.1 Display Dashboard

To access the Dashboard:

Click the **Dashboard** link at the top right-hand side of the main interface window. The *Dashboard* is launched in a separate window and can be open at the same time as other Call Center windows.

The screenshot shows the 'Dashboard' window for 'Telesystem Hosted Call Center'. It is divided into two main sections: Queue Statistics and Agent Statistics.

Queues		Current		Averages			Agents			
Name ^	Status	Calls In Queue	Longest Wait	EWT	AHT	ASA	Staffed	Idle	Unavailable	Show Agents
Account		0/10	00:00	00:00	00:00	00:00	3/9	1	1	<input type="checkbox"/>
Billing		1/100	11:40	00:00	00:00	00:00	1/3	0	0	<input checked="" type="checkbox"/>
Finance		0/50	00:00	00:00	01:16	00:00	0/4	0	0	<input checked="" type="checkbox"/>
Sales		0/10	00:00	00:00	00:00	00:00	0/1	0	0	<input type="checkbox"/>
Technical		0/20	00:00	00:00	00:00	00:00	0/5	0	0	<input checked="" type="checkbox"/>

Agents		Memberships		Current			Averages			
Name ^	Queues	Sign-in Time	Sign-in Dur	Call State (Time)	Agent State (Time)	% Available	Avg Busy In	Avg Busy Oj	Avg Wrap-Up	
Edwards, Paul	4	17:00:52	01:37:21	Ringin (12:18)	Available (01:37:17)	99%	00:00	00:00	00:00	
Manu, Mahotra	6			On Call (07:23)	Available (01:37:38)	0%	00:00	00:00	00:00	
McC Kenzie, Daniel	4			Idle (29:19)	Unavailable-101(13:29)	0%	00:00	00:00	00:00	

Figure 87 Dashboard

The *Dashboard* is divided into two parts with queue information in the top half and agent information in the bottom half. The information is updated at a configurable refresh rate. The default is 5 seconds.

By default, information about agents is hidden.

To view agents staffing a call center:

Check the *Show Agents* check box in the row for that call center.

Some fields are color-coded to provide visual indicators of threshold severity. Threshold values are configured by your administrator.

Severity	Color
0 (no threshold crossed)	No color
1 (yellow threshold crossed)	Yellow
2 (red threshold crossed)	Red

Figure 88 Visual Indicators of Threshold Severity

11.2 Queue Information

The *Dashboard* displays each call center queue on a separate line and provides the following information about each queue:

- *Name* – This is the name of the call center.
- *Status (Premium call centers)* – This identifies the service mode in which the call center currently operates, which can be one of the following:

- *Night Service* – The call center is processing calls according to the Night Service schedule and policy.
- *Night Service Override* – The call center has been manually forced to follow the Night Service policy.

NOTE: The *Night Service* or *Night Service Override* status appears only if the Night Service policy is triggered, either by the *Night Service* schedule or by a manual override, and if the action to apply to incoming calls is set either to “Perform busy treatment” or “Transfer to phone number/SIP-URI”. Setting the action to “None” acts as if the Night Service policy was not triggered and the *Night Service/Night Service Override* status is not displayed in Call Center.

- *Holiday Service* – The call center is processing calls according to the Holiday Service schedule and policy.

NOTE: The *Holiday Service* status appears only if the *Holiday Service* policy is triggered and if the action to apply to incoming calls is set by an Hosted VoIP Phone System administrator to either “Perform busy treatment” or “Transfer to phone number/SIP-URI”. Setting the action to “None” acts as if the *Holiday Service* policy was not triggered and the *Holiday Service* status is not displayed in Call Center.

- *Forced Forwarding* – All calls to this call center are forwarded to a specified destination.
- *Normal* – Call center is in normal mode of operation; none of the above modes is enabled.

NOTE: When the call center is in Normal service mode, the *Status* field is empty.

- *Calls in Queue* – This is the number of queued calls expressed as a ratio of the total queue capacity for that call center. For example, “6/10” means that there are six calls in the queue, which can queue a maximum of ten calls.
- *Long Waiting Call* – This is the waiting time of the call that has been in the queue the longest.
- *EWT (Expected Waiting Time)* – This is the expected waiting time of calls in the queue.
- *AHT (Average Handle Time)* – This is the average handling time for calls in the queue.
- *ASA (Average Speed of Answer)* – This is the average amount of time a caller spends in the queue before the call is offered to an agent.
- *Staffed (Agents)* – This is the number of agents managed by you that are in *Sign-In*, *Available*, *Unavailable*, or *Wrap-Up* ACD state, as a ratio of all agents managed by you for this call center.
- *Idle (Agents)* – This is the number of agents who are in the *Available* ACD state but presently not on a call.
- *Unavailable* – This is the number of agents who are signed in to the call center but not available to take calls.
- *Show Agents* – When this check box is selected, the agents who are joined in the call center are displayed in the *Agents* area of the *Dashboard*.

The fields that provide visual indicators are *Calls in Queue*, *Longest Waiting Time*, *EWT*, *AHT*, and *ASA*.

11.3 Agent Information

The *Dashboard* displays information about the agents for the selected queues. You select the queues for which you want to view agents' information by checking the *Show Agents* box on the lines for the queues in the *Queues* area of the *Dashboard*. The following information is provided for each displayed agent:

- *Name* –This is the agent's name.
- *Queues (total)* – This is the total number of queues to which the agent is assigned. This number is a link, which when clicked, opens a dialog box that lists the agent's queues.
- *Sign-In Time* – This is the agent's most recent sign-in time.
- *Sign-In Duration* –This is the amount of time that the agent has been signed in.
- *Call State (Time)* –This is the call state and time on the current call. The call state can be *Idle*, *Ringin*g, or *On a call*. If an agent is in multiple calls, the call time reflects the time of the longest running call. When a call is released, then the call time reflects the time on the remaining calls.
- *Agent State (Time)* –This is the agent ACD state and time. If an agent is unavailable, the unavailable code is shown.
- *% Available* –This is the time that the agent was available to take calls shown as a percentage of the duration of the current sign-in.
- *Avg Busy In* –This is the average time spent by the agent on an incoming ACD call.
- *Avg Busy Out* –This is the average time spent by the agent on an outgoing ACD call.
- *Avg Wrap-Up* –This is the average time spent by the agent in a post call wrap-up.

Fields that provide visual indicators are *Call State (Time)*, *On Call*, *Idle*, *Agent State (Time)*, *Unavailable*, *Avg Busy In*, *Avg Busy Out*, and *Avg Wrap-Up*.

The *Dashboard* is designed to be used together with the *Queued Calls* pane and the *Agents* panel in the *Contacts* pane. The *Dashboard* provides you with a real-time view of agents and queues, while the *Agents* panel and *Queued Calls* pane allow you to take actions on monitored agents and ACD calls. For more information about the actions you can take to manage agents and queued calls, see sections [9 Manage Agents](#) and [10 Manage Queued Calls](#).

11.4 Select Information to Display

By default, Call Center displays information about call centers and agents as described in sections [11.2 Queue Information](#) and [11.3 Agent Information](#). You may however modify what information you want to appear in the *Dashboard*.

To select information to display:

- 1) Right-click the first row in the queued calls or agents table.
- 2) From the menu that appears, select *Columns*.
- 3) From the list of available columns, uncheck the columns you want to hide and check the columns you want visible.

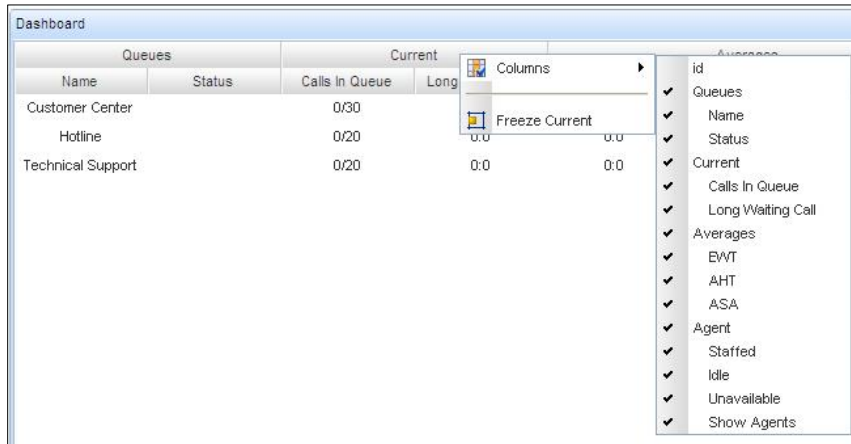


Figure 89 Dashboard – Select Columns to Display

4) When you are done, click anywhere in the *Dashboard* outside the menu.

12 Generate Reports

Call Center provides reporting functions to agents and supervisors. Agents can only generate reports about their own activity whereas supervisors have access to reports on activity and performance of agents and call centers under their supervision.

The Reporting feature allows you to run reports and schedule reports to run in the future using predefined templates. Reports can be of type *Agent* or *Call Center*.

The report templates available to you depend on how your administrator has configured your system.

You use the Reporting link at the top of the main interface to access pages used to generate and schedule reports.



Figure 90 Main Interface (Top of Window)

This section provides an example of a report.

12.1 Run Report

To run a report:

- 1) Click the **Reporting** link at the top right-hand side of the main window. A *Report* window appears.

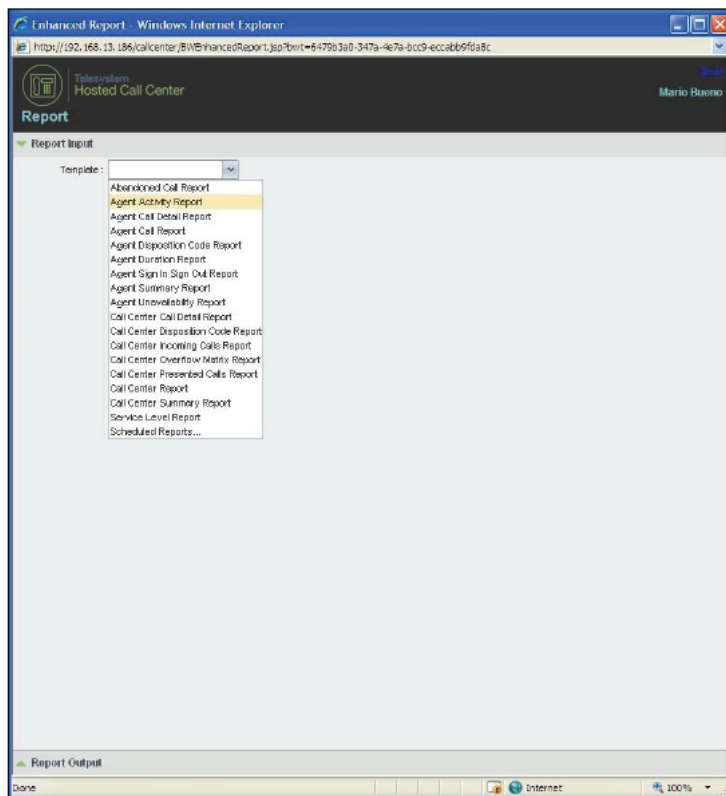


Figure 91 Report Window

Select a report template from the drop-down list. The page displays the input parameters for the report.

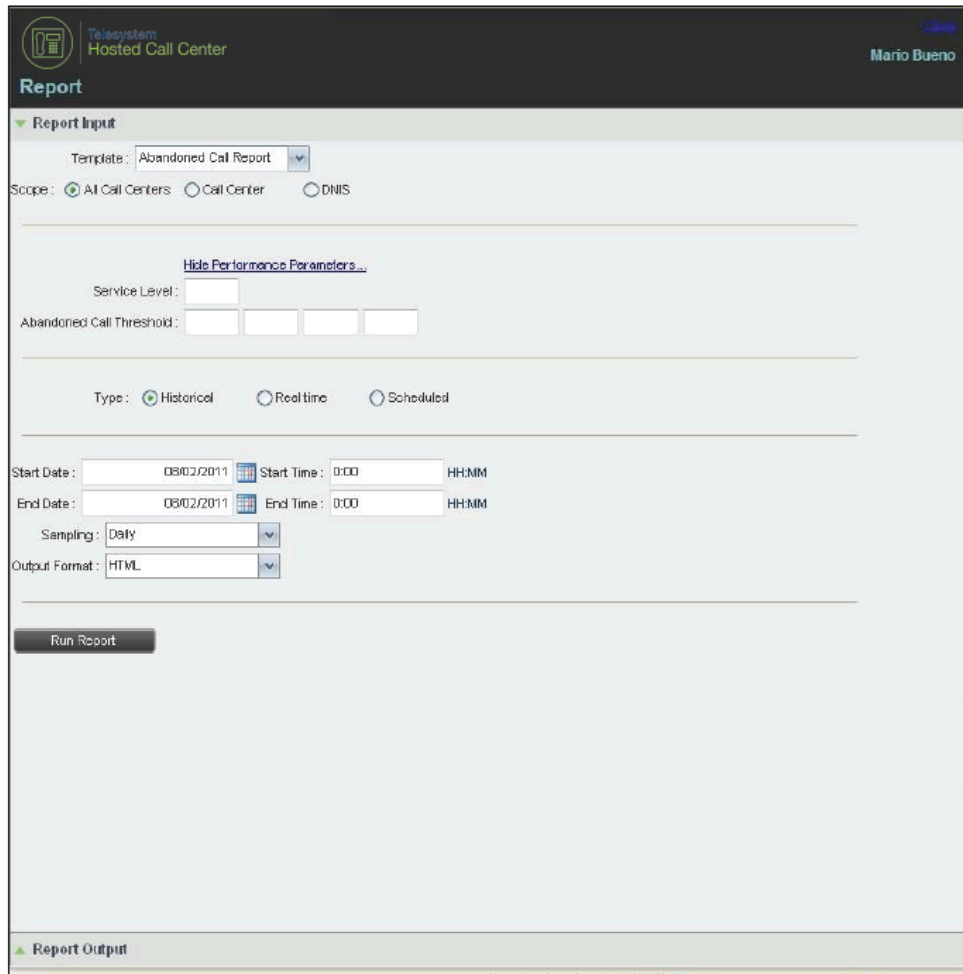


Figure 92 Abandoned Call Report – Running Report

- Fill in the required information. The input that you need to provide depends on the template you select and the report type. The following table explains the input parameters for all reports.

Input Field	Description	Allowed Value
Scope	For <i>Agent Reports</i> , it allows you to specify the agents to include in the report. You can check <i>All Agents</i> or <i>Agents</i> . If you check <i>Agents</i> , select agents from the drop-down list. NOTE: This parameter is disabled when an agent runs the report, since agents can only run reports about themselves.	All Agents, Agents
	For <i>Call Center Reports</i> , it specifies the call centers or DNIS numbers to include in the report. You can check <i>All Call Centers</i> , <i>Call Center</i> , or <i>DNIS</i> . <ul style="list-style-type: none"> If you check <i>Call Center</i>, select call centers from the drop-down list. If you select <i>DNIS</i>, select a call center and DNIS numbers from the drop-down lists. For <i>DNIS</i> you can also select <i>ALL DNIS</i>. 	All Call Centers, Call Center, DNIS

Input Field	Description	Allowed Value
<i>Call Completion</i>	This setting is used to count the number of ACD calls an agent has completed within a service level during the specified interval. The Call Completion service level can be set to "1" through "7200" seconds.	1 through 72000
<i>Short Duration</i>	This setting is used to count the number of ACD short duration calls completed by an agent during an interval. You can set the maximum length of a short duration call to "1" through "7200" seconds.	1 through 7200
<i>Service Level</i>	This setting allows you to provide up to five service levels, used to perform service-level calculations for each call center or DNIS. Each service level can be set to "1" through "7200" seconds.	1 through 7200
<i>Service Level Options</i>	<p>These settings are used to determine whether certain types of calls should be included in the service-level calculations:</p> <ul style="list-style-type: none"> ▪ Check <i>Include overflow time transfers in service level</i> to include calls transferred due to time overflow. ▪ Check <i>Include other transfers in service level</i> to include calls transferred for other reasons. ▪ Select one of the following options for abandoned calls: <ul style="list-style-type: none"> ▪ <i>Exclude Abandoned Calls</i> to exclude all abandoned calls ▪ <i>Include All Abandoned Calls</i> to include all abandoned calls ▪ <i>Include All Abandoned Calls Except Before Entrance Completes</i> to include calls abandoned after the entrance message has finished playing ▪ <i>Include Abandoned Calls Except in Defined Interval</i> to include calls abandoned after the time specified by the abandoned call interval parameter. 	These options can be checked or unchecked.
<i>Abandoned Call Interval</i>	If you selected the <i>Include Abandoned Calls Except in Defined Interval</i> option, enter the desired interval in this text box in seconds.	1 through 7200
<i>Service Level Percentage</i>	This setting allows you to specify the service-level objective (expressed as a percentage of calls).	
<i>Type</i>	<p>This can be checked as <i>Historical</i> or <i>Real time</i>.</p> <ul style="list-style-type: none"> ▪ Historical reports show data from the assigned start date to the assigned end date. ▪ Real-time reports show data from the assigned start date to the present, with the current interval refreshed with real-time data. <p>Real-time reports for individual agents contain data for each time interval, with the last interval reflecting real-time data, if requested (subject to the refresh rate). When the interval switches over, the final data for the last time period is captured and shown as historical data and real-time data is reflected in the new time interval.</p>	Historical or Real time
<i>Start Date</i>	<p>This is the date when you want the report to start. It can be set by typing in the text box or clicking the Calendar icon. This is compulsory. The oldest historical date depends on the interval selected:</p> <ul style="list-style-type: none"> ▪ 180 days of half-hour interval statistics ▪ 365 days of hourly interval statistics ▪ 730 days of daily interval statistics 	MMM DD, YYYY
<i>Start Time</i>	This is the time when you want the report to start. You can select the hour format (A.M., P.M., or Military time) from the <i>Hour Selection Type</i> . Time is applicable for hourly and minute intervals only.	1:00am through 12:59am, 1:00pm through 12:59pm, or 0:00 through 23:59

Input Field	Description	Allowed Value
<i>End Date</i>	This is the date when you want the report to end. It can be set by typing in the text box or clicking the Calendar icon. This is required when a Historical report is selected.	MMM DD, YYYY
<i>End Time</i>	This is the time when you want the report to end. You can select the hour format (A.M., P.M., or Military time) from the <i>Hour Selection Type</i> . Time is applicable for hourly and minute intervals only. This is required when a Historical report is selected.	1:00am through 12:59am, 1:00pm through 12:59pm, or 0:00 through 23:59
<i>Sampling</i>	This sampling period is only applicable to interval-based report templates and determines how the report information is presented. For example, an hourly report displays information for each hour of the report time frame.	15 minutes, 30 minutes, Hourly, Daily, Weekly, Monthly
<i>Output Format</i>	This allows you to specify in what format you would like the report output to be generated. If you select Hypertext Markup Language (HTML) or PDF, the report is displayed in the <i>Report</i> window. If you select Excel File Format (XLS), a file is created that you can save on your computer.	PDF, XLS, HTML

3) Click **Run Report**.

The results of the report are displayed in the *Report Output* area of the window. See the following section for an example of a report.

NOTE: Adobe Reader 10.01 has a setting *Enable Protected Mode at startup*, which is enabled by default. If you select the PDF report format and are using Adobe Reader 10.01 (or later, which has this setting), you need to disable the setting; otherwise, report results are not displayed.

To disable the protected mode in Adobe Reader, perform the following steps.

- 1) Close all opened Internet Explorer and Adobe Reader instances.
- 2) Open Adobe Reader.
- 3) From the menu bar, select *Edit* and then *Preferences*. The *Preferences* dialog box appears.

- 4) From the *Categories* menu on the left, select *General*.

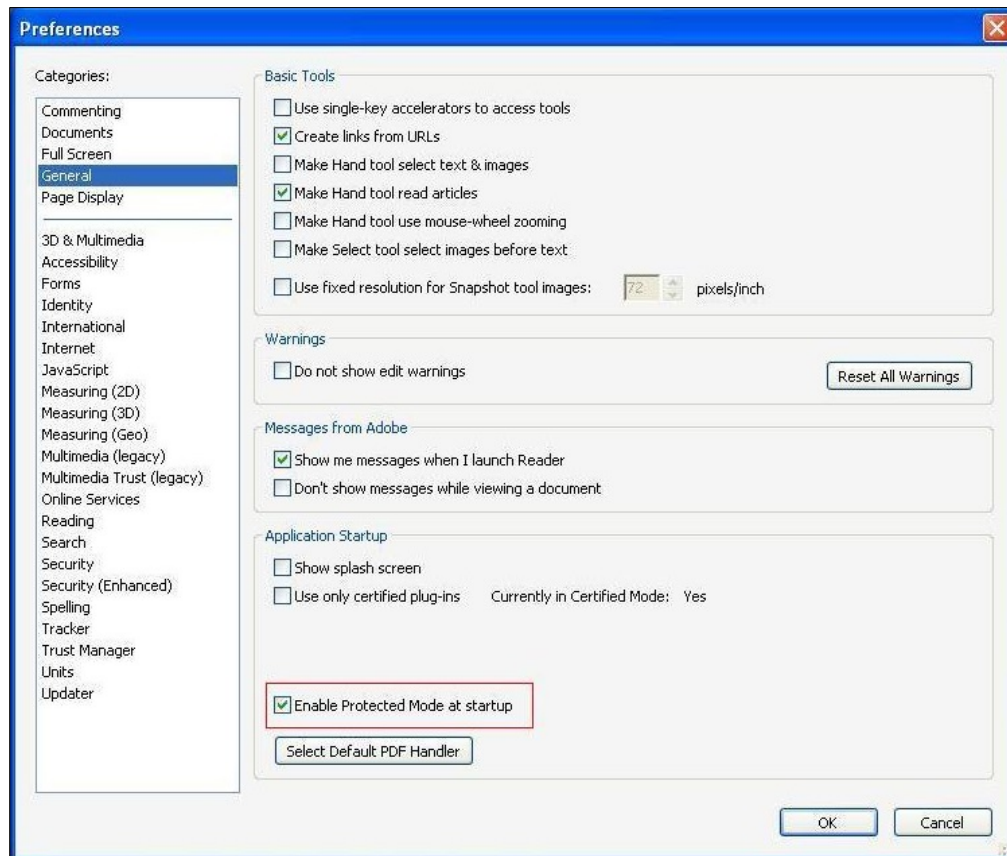


Figure 93 Preferences – General

- 5) Uncheck *Enable Protected Mode at startup*.
- 6) Click **OK**.
- 7) Close Adobe Reader.

12.1.1 Report Results (Example)

Depending on the report type, the report results can contain the following elements: A pie chart, a bar chart, a table, a high-water marks table, and a line chart.

If you select HTML or PDF report format when requesting a report, the report is displayed in the *Report* window. If you select XLS, a file is created that you can save on your computer.

This section provides an example of a report: Abandoned Calls Report.

The results of the Abandoned Calls Report are presented in a bar chart and table.

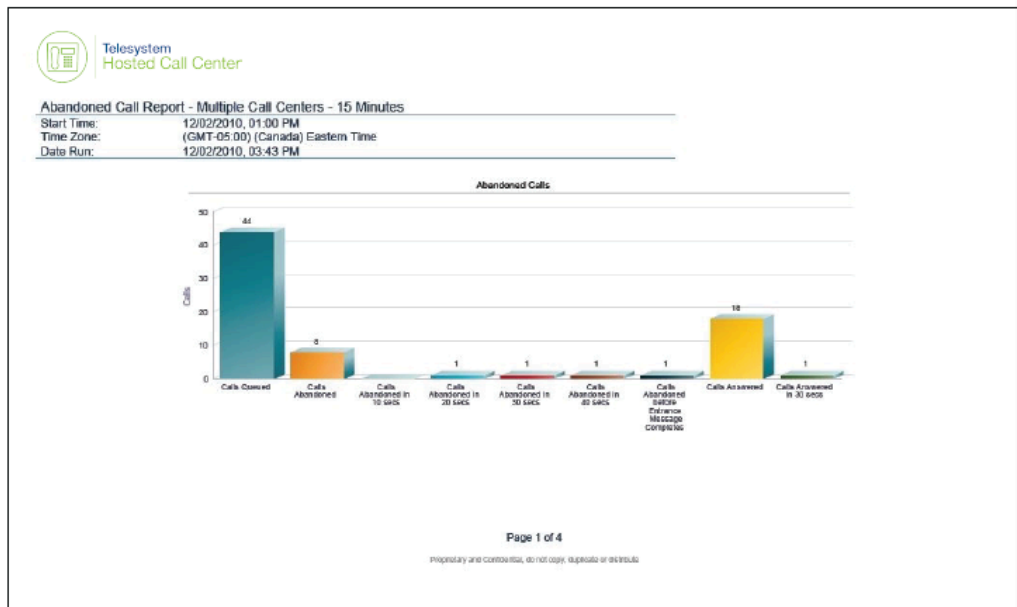


Figure 94 Abandoned Calls Report – Bar Chart

Call Date/Time	Call Center Name	Calls Queued	Calls Abandoned	% Calls Abandoned	Calls Abandoned in 10 secs	% Calls Abandoned in 10 secs	Calls Abandoned in 20 secs	% Calls Abandoned in 20 secs	Calls Abandoned in 30 secs	% Calls Abandoned in 30 secs	Calls Abandoned in 40 secs	% Calls Abandoned in 40 secs	Calls Abandoned before Entrance Message Complete	% Calls Abandoned before Entrance Message Complete	Calls Abandoned after 30 Seconds Message Complete	% Calls Abandoned after 30 Seconds Message Complete	Longest Wait Abandoned
12/02/10, 01:00 PM		0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 01:15 PM		0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 01:30 PM		0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 01:45 PM		0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 02:00 PM		0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 02:15 PM		1	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	1	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 02:30 PM		0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 02:45 PM		1	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	1	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
12/02/10, 03:00 PM		2	1	50.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	1	50.0%	1	50.0%	00:01:15
	Summary	2	1	50.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	1	50.0%	1	50.0%	00:01:15
12/02/10, 03:15 PM		0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00
	Summary	0	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	00:00:00

Page 2 of 4
 Proprietary and confidential, do not copy, duplicate or distribute.

Figure 95 Abandoned Calls Report – Table (Fragment)

12.2 Schedule Report

To schedule reports, your company (group or enterprise) must have Enhanced Reporting enabled. For more information, see your administrator.

To schedule a report:

- 1) Click the **Reporting** link at the top right-hand side of the main window. A *Report* window appears.

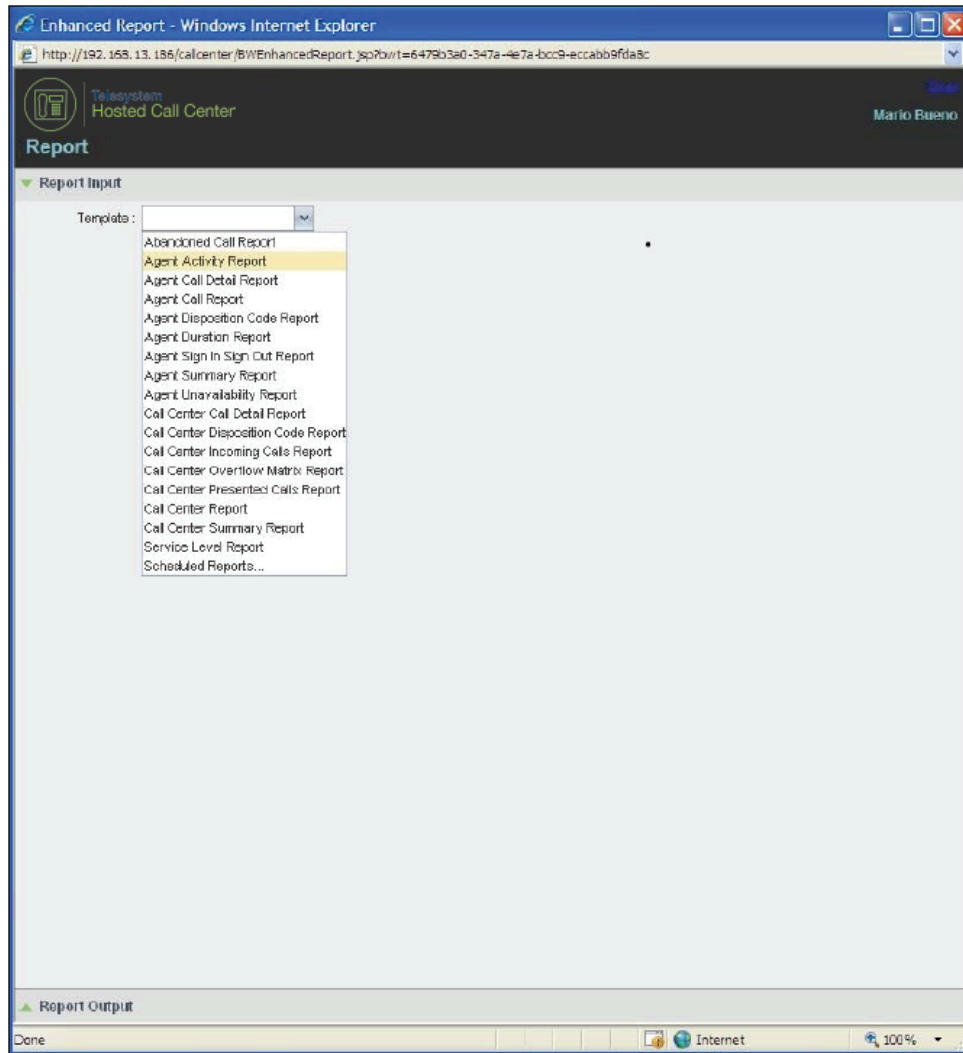


Figure 96 Report Window – Report List

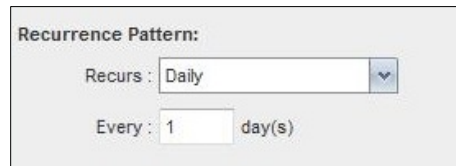
- 2) Select a report template from the drop-down list. The page displays the input parameters for the report.

Figure 97 Scheduling Report (Abandoned Call Report)

- 3) For *Type*, select *Scheduled*.
- 4) Provide the name and the description of the report.

- 5) Specify the recurrence pattern of the report. From the *Recurs* drop-down list, select one of the following options: *Never*, *Daily*, *Weekly*, *Monthly*, or *Yearly*. *Never* signifies that this is a one-time report.

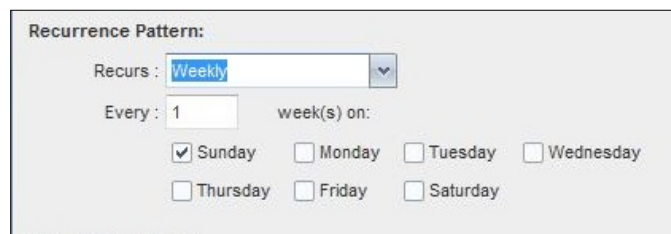
- If you selected *Daily*, enter the frequency of recurrence in days.



Recurrence Pattern:
 Recurs : Daily
 Every : 1 day(s)

Figure 98 Scheduled Report – Daily Recurrence Pattern

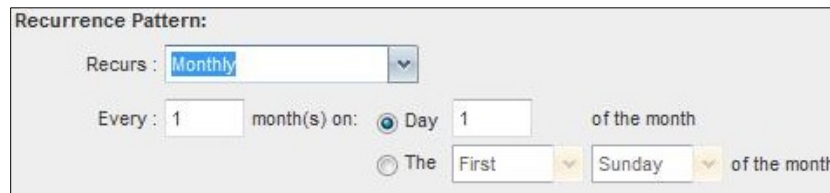
- If you selected *Weekly*, enter the frequency of occurrence in weeks and select the day of the week when you want the report to be generated.



Recurrence Pattern:
 Recurs : Weekly
 Every : 1 week(s) on:
 Sunday Monday Tuesday Wednesday
 Thursday Friday Saturday

Figure 99 Scheduled Report – Weekly Recurrence Pattern

- If you selected *Monthly*, enter the frequency of occurrence in months and specify the day when you want the report to be generated. Select one of the following options:
 - To schedule the report on a specific day of the month, for example, the twenty-seventh, check *Day <X>* of the month and enter the day.
 - To schedule the report on a specific day of the week within the month, for example the second Monday of the month, check *The <X> <Day of week>* of the month and select *X* and *Day of week* from the drop-down lists.



Recurrence Pattern:
 Recurs : Monthly
 Every : 1 month(s) on: Day 1 of the month
 The First Sunday of the month

Figure 100 Scheduled Report – Monthly Recurrence Pattern

- If you selected *Yearly*, specify the frequency of occurrence in years, for example every two years, and specify the day for the recurrence of the report. Select one of the following options:
 - To schedule the report on a specific day of the year, check *Day <X> of <Month>* and select the day and the month.
 - To schedule the report on a specific day of the week and month, for example, the first Sunday of January, check *The <X> <Day of week> of <Month>* and select *X*, *Day of week*, and *Month* from the drop-down lists.

Recurrence Pattern:

Recurs : Yearly

Every : 1 year(s) on: Day 1 of January

The First Sunday of January

Figure 101 Scheduled Report – Yearly Recurrence Pattern

- 6) Specify when the report should run.
 - For a non-recurrent report, specify the actual date and time to generate the report.

Report Time:

*Schedule Date : 07/30/2012

*Schedule Time : 12:00pm

Figure 102 Report Time for a Non-recurrent Report

- For a recurrent report, specify when the report should be generated for the first time.

Report Time:

*Start Date : 07/30/2012

*Run Time : 12:00pm

Figure 103 Report Time for a Recurrent Report

NOTE: The start date and run time (and for weekly reports the day of the week) determine when the report is generated for the first time. The subsequent times are determined by the recurrence pattern and range.

- 7) For a recurrent report, specify when the reporting should end. For *Recurrence Range*, select from the following options:
 - *Never*
 - *After <X> occurrences*, and enter the number of occurrences
 - *Date*, and select a date from the calendar

Recurrence Range:

Start Date : 7/30/2012 Note: Start Date is always equal to Report Time Start Date value

End : Never

After [] occurrences

Date 07/30/2013

Figure 104 Scheduled Report – Recurrence Range

- 8) Specify the report time frame, that is, the period for which you are requesting the report.
 - For a non-recurrent report, enter the actual dates and times.

Timeframe : 07/30/2012 : 12:00pm HH:MM [am/pm] : 07/30/2012 : 12:00pm HH:MM [am/pm]
 Sampling : Daily
 Output Format : PDF

Figure 105 Report Timeframe for a Non-recurrent report

- For a recurrent report, select the time frame relative to the report generation time, for example, the previous month, previous five days, and so on.

Timeframe : Previous : 1 Day
 Sampling : Daily
 Output Format : PDF

Figure 106 Report Timeframe for Recurrent Report

NOTE: A report time frame always has a beginning date and time and an end date and time. For a recurring report the relative time frame is converted to the actual dates and times at the moment when the report is run.

The actual time frame always starts at the top of the hour, day, week, month, or year and is based on the selected time zone and day of the week. For example, if a report is scheduled to run every day at 5:45 P.M. for the previous two hours, then the actual time frame of the report is from 3:00 P.M. to 5:00 P.M. of the day when the report is run

- Specify the sampling frequency. From the *Sampling* drop-down list, select a frequency.
- Specify the output format of the report. From the *Output Format* drop-down list, select a format, for example, PDF.

Timeframe : Previous : 1 Day
 Sampling : Daily
 Output Format : PDF

Figure 107 Report Sampling and Output Format

- Enter the e-mail addresses of the recipients of the report.
- Enter the remaining parameters, as required.
- Run** Report.
- Click **Schedule Report**.

The report is scheduled. It is run at the specified times and sent to the recipients configured in the report schedule.

12.3 Manage Scheduled Reports

You can list, modify, and delete scheduled reports.

To manage scheduled reports:

- 1) Click the **Reporting** link at the top right-hand side of the main window. A *Report* window appears.
- 2) From the drop-down list, select *Scheduled Reports*. A *Scheduled Reports* dialog box appears, listing the reports that you have scheduled.

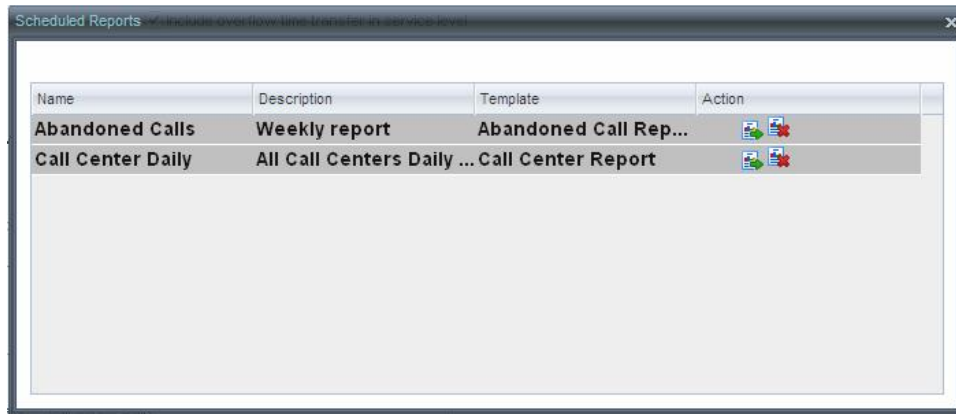




Figure 108 Scheduled Reports Dialog Box

- 3) To edit a report, click the **Load** button  in the row for the report, and modify the report as required.
- 4) To delete a report, click the **Delete** button  in the row for the report.

13 Configure Call Center

You use the *Settings* page, accessed via the Settings link at the top right-hand side of the main page to configure various aspects of the Call Center application.

To return to the main interface, click the **Back To Application** link.

NOTE: Do **not** use the internet browser's Back button to return to the main interface.

This section provides information about the options that you can use to configure Call Center.

- [Settings – General](#)
- [Settings – Application](#)
- [Settings – Services](#)
- [Settings – Plug-ins](#)
- [Settings – Messaging](#)
- [Settings – Report](#)
- [Settings – About](#)

NOTE: Depending on your system configuration, some settings may not be available.

13.1 Settings – General

You use the General tab to configure miscellaneous settings that improve the usability of Call Center.

The screenshot shows the 'General' settings page. At the top, there is a navigation bar with tabs: General, Application, Services, Plug-ins, Messaging, Report, and About. The 'General' tab is selected. Below the navigation bar, the page is titled 'General'. The settings are organized into sections:

- Account:** A link labeled 'Change Password...'
- Hotel Guest:** A text input field with the placeholder text 'Enter Host'.
- Language:** A dropdown menu currently showing 'English (US)' and a checked checkbox labeled 'Synchronize language with service profile'.
- Screen Pop:** A text input field with the placeholder text 'Enter URL' and an unchecked checkbox labeled 'Auto pop incoming calls'.
- Date Format:** Two radio buttons: 'MM/DD/YYYY' (selected) and 'DD/MM/YYYY'.
- Time Format:** Two radio buttons: 'AM/PM' (selected) and '24 Hour'.
- Workspace:** Three buttons: 'Save Workspace', 'Load Workspace', and 'Restore Workspace', along with an unchecked checkbox labeled 'Always save workspace on signout'.

Figure 109 Setting – General

The following subsections describe the settings that can be configured on this page.

13.1.1 Account

You use this area to change your Hosted VoIP Phone System User password.

Call Center shares logon credentials with the Hosted VoIP Phone System. So when you change your password in Call Center, remember to use this new password when accessing your web portal.

NOTE: The password you enter must meet the password requirements set on the Hosted VoIP Phone System web portal.

To change your password:

- 1) Click the **Change Password** link. The section expands, allowing you to change your password.

Figure 110 Account – Change Password

- 2) Enter your current and new password and click **Change Password**.

Note that the *Reset* button does not reset your password. It only clears the input boxes.

13.1.2 Hotel Guest

This setting allows you to configure the Hoteling Host, which is required when you use Call Center from a Hoteling desk/device. This way you do not need to enter this information every time you sign in to Call Center if you use the same Hoteling device.

In the text box, enter the user name of the Hoteling Host who corresponds to the desk/device you are using, for example, “station_224@acme.com”.

13.1.3 Language

The language settings allow you select the language of the Call Center user interface.

- The drop-down list lists the languages available in your edition of Call Center. To change the language, select a new language from the list.
- *Synchronize language to my profile* – This box, when checked, synchronizes the Call Center language with your Hosted VoIP Phone System User profile and ignores the language selection on this page.

13.1.4 Screen Pop

You use the screen pop settings to configure the URL that may be launched on incoming calls.

- *Enter URL* – This text box allows you to enter the URL address of the web page that Call Center opens using the default browser when you click the **Web Pop URL** button in the *Call Notification* pop-up window.
- *Auto pop for incoming calls* – When this option is checked, Call Center launches the Web Pop URL without your having to click the Web Pop URL button in the *Call Notification* pop-up window for each incoming call.

The URL can point to any URL address, but typically points to a web application that parses optional call parameters and passes them to a Customer Relationship Management (CRM) application or other database. For example:

```
http://www.mysite.com/webapp.php?remoteNumber=__REMOTE_PHONE__&sp=__SERVICE_PROVIDER__
```

This URL passes the incoming calling number and the service provider ID to the web application at www.mysite.com. The web application formats the data for the applicable database and launches the web page on your PC.

There are a number of optional parameters that the client can pass to the browser. The following list summarizes these parameters:

- `__USER__`: The user's Hosted VoIP Phone System ID (Note that in this case the "user" is the Hosted VoIP Phone System subscriber.)
- `__FIRST__`: The first name of the user
- `__LAST__`: The last name of the user
- `__EMAIL__`: The e-mail address of the user
- `__GROUP__`: The name of the Hosted VoIP Phone System group to which the user belongs
- `__SERVICE_PROVIDER__`: The name of the Hosted VoIP Phone System service provider to which the user belongs
- `__PHONE__`: The phone number of the user
- `__REMOTE_PHONE__`: The phone number of the remote party
- `__REMOTE_NAME__`: The name of the remote party (when available)
- `__CALL_TYPE__`: "Incoming", "Outgoing", or "Alerting"
- `__DNIS_NAME__`: The name of the DNIS on which the call was received
- `__DNIS_PHONE__`: The phone number of the DNIS on which the call was received

13.1.5 Date Format

This setting allows you to select the format for displaying dates in reports. The format is used for all dates that are included in generated reports. The possible options are:

- MM/DD/YYYY
- DD/MM/YYYY

13.1.6 Time Format

This setting allows you to select the format for displaying time in reports. It is used for all times that are included in generated reports. The possible options are:

- AM/PM
- 24 hours

Note that this setting does not impact the format in which event duration is reported in generated reports, which is always *DD:HH:MM:SS*.

13.1.7 Workspace

Call Center allows you to customize elements of your workspace, such as the size and placement of windows on the desktop. The system remembers the setup between sessions.

The following elements can be customized:

- The size and position of the web browser window in which the main interface is displayed
- The size of the panes (Call Console, Contacts, and Queued Calls)
- The size and position of the *Dashboard* window
- The size and position of any *Report* window

NOTE 1: This functionality does not work in Internet Explorer, due to a technical limitation of Internet Explorer.

NOTE 2: When a window is vertically resized, the panes do not always resize to fill the window. To resize a window, drag the window from the bottom right-hand corner or collapse and then expand the panes after resizing to adjust them to the window.

- *Save Workspace* – This button, when clicked, saves the current workspace.
- *Load Workspace* – This button, when clicked, arranges your workspace according to the last saved configuration.
- *Restore To Default* – This button, when clicked, restores the workspace to the system default configuration.
- *Always save workspace on signout* – When you sign out from the client, Call Center asks you whether you want to save your current workspace. To save your workspace automatically when signing out, without being asked, check the *Always save workspace on signout* box.

To customize your workspace:

- 1) Arrange the windows the way you like.
- 2) Click the **Save Workspace** button to save the current configuration. To restore the system default, click **Restore To Default**.
- 3) At any time to return to the last saved configuration, click the **Load Workspace** button.

13.2 Settings – Application

You use the Application tab to configure your application settings. The settings are different for agents and supervisors. They are described in the following subsections.

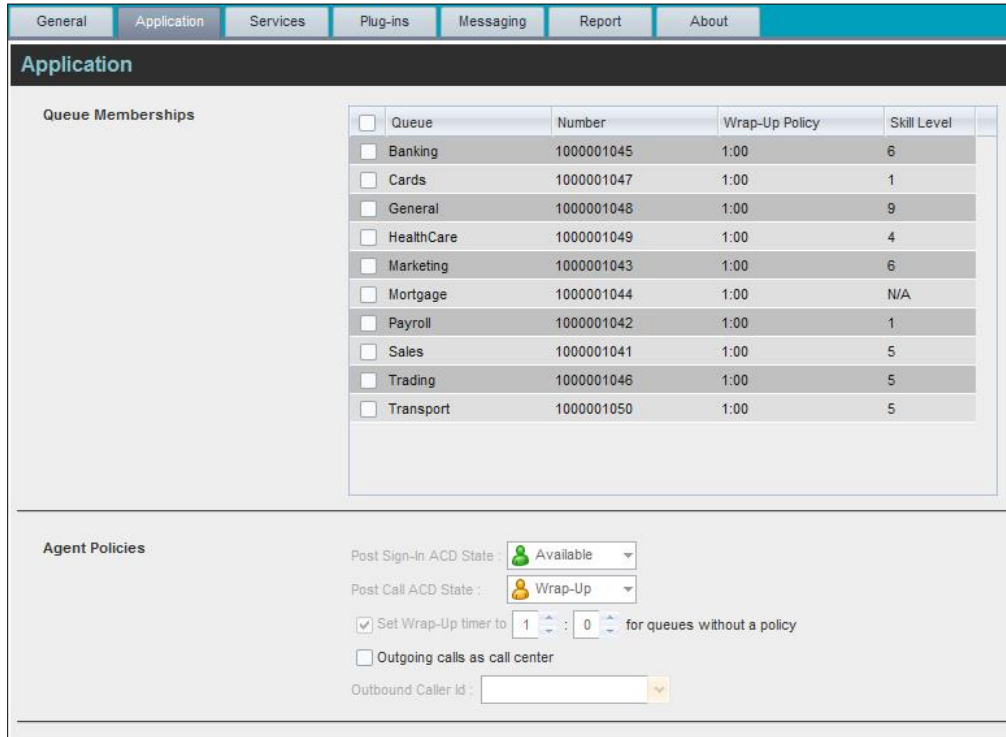


Figure 111 Settings – Application

13.2.1 Barge-In & Monitor

The following options only apply if you have the Directed Call Pickup with Barge-in and/or Call Center Monitoring services assigned. If the Call Center Monitoring service is not assigned, then the *Monitor* option is not visible.

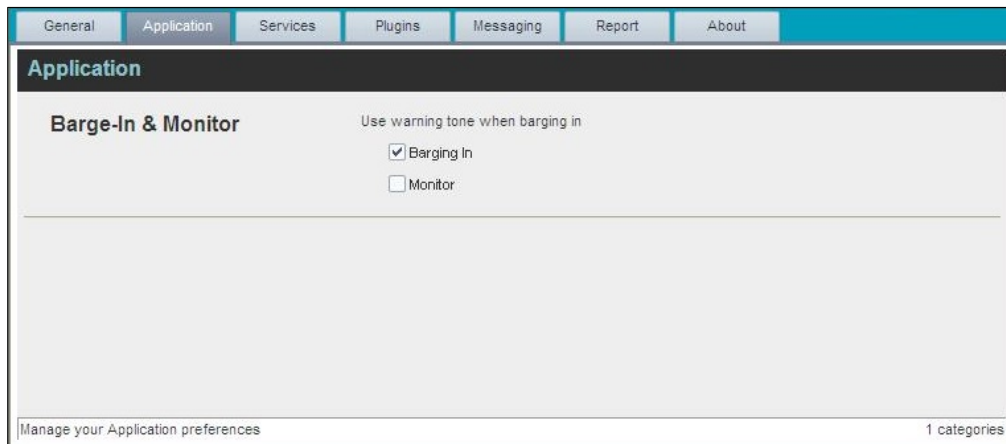


Figure 112 Settings – Application

Use warning tone when:

- *Barging In* – When this option is set, the agent hears a warning tone when you barge in on their call.
- *Monitoring* – When this option is checked, the agent hears a warning tone when you start silently monitoring their call.

13.3 Settings – Services

You use the Services tab to configure various services assigned to you by your administrator on the Hosted VoIP Phone System Admin portal, which are integrated with Call Center. These settings are only available if you have been assigned such services. For more information, see your administrator.

The services are grouped into two categories: Active and Inactive.

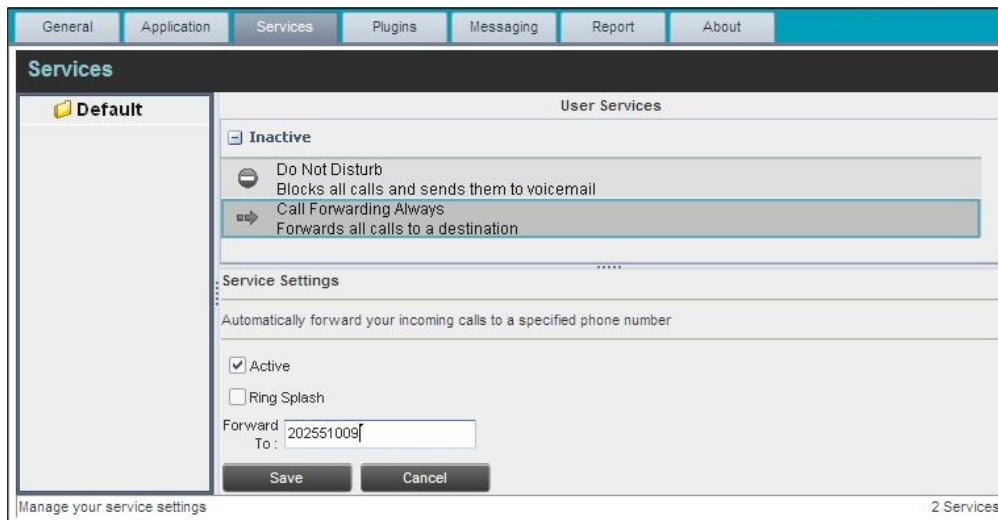


Figure 113 Settings – Services

The services that you can configure (if you have been assigned the services) are:

- *Do Not Disturb* – When you activate this service, you are not available to take calls, and all your calls are automatically sent to your voice mail.
- *Call Forwarding Always* – When you activate this service, you must provide the phone number to forward your calls to. When the service is active, all your calls are forwarded to the specified number.

To activate a service:

- 1) Select the service and check the *Is Active* box. The service is moved from the *Inactive* to *Active* category.
- 2) If you enabled the *Call Forwarding Always* service, in the *Forward To* box that appears, enter the number to forward your calls to.
- 3) To generate a ring splash for incoming calls, check the *RingSplash* option.
- 4) To save your changes, click **Save**.

13.4 Settings – Plug-ins

You use the Plugins tab to configure the plug-in software used by Call Center to provide functionality such call notification, program shortcuts, and call log.

Figure 114 Settings – Plugins

13.4.1 Notification

These options control when and how call notifications are displayed. The options you can set are as follows:

- Focus window for incoming calls** – When this option is checked and the browser window that is running Call Center is minimized, Call Center automatically restores the window on incoming calls.

This does not work in Firefox. In Internet Explorer, you must have only one tab open in the web browser running Call Center.

- Show notification for calls** – When this option is checked, Call Center displays the *Call Notification* pop-up window on top of other applications' windows when you receive a call. When you check this box, you need to select an option from the drop-down list to specify the condition under which notifications are displayed.

This does not work if other tabs are open in the same web browser window as Call Center. In addition, if calls come within eight seconds of each other, the *Call Notification* pop-up window appears only for the first call of that series.

13.4.2 Microsoft Outlook

The Microsoft Outlook options control Outlook integration with Call Center. They are only visible if Outlook integration is enabled in Call Center.

The options you can set are as follows:

- *Enable/Disable Outlook Integration* – This determines whether Call Center integrates with Outlook to provide you with access to your Outlook contacts. If Outlook integration is disabled, the corresponding desktop plug-in software components are not downloaded from the Hosted VoIP Phone System.
- *Retrieve contacts from* – This option allows you to specify where to look for your Outlook contacts.
- *Use Outlook contacts as preferred CLID lookup* – When this option is checked, Call Center uses Outlook to try to identify a caller, when the caller ID is unknown.

NOTE: The Outlook Integration feature provides the following functionality: CLID lookup, saving vCards, and accessing and searching Outlook contacts. When using Microsoft Outlook 2010 (32- or 64-bit edition), Outlook must be running before Call Center is launched for these functions to work.

If Outlook contacts are not loading, log out of Call Center and clear your browser's cache. Then log back into Call Center and then refresh the page.

13.4.3 LDAP v3

LDAP settings allow you integrate an LDAP directory with Call Center. These options are only visible if LDAP integration is enabled in Call Center and the local network has been configured appropriately. If you do not know the appropriate settings, contact your system administrator.

Make sure you have correctly imported a valid certificate in the Java Keystore (JKS) with the keytool.

To import a certificate:

- 1) Click **Start** and then select *Run...*
- 2) Type "cmd" and click **OK**.
- 3) Type "<Java Runtime Path>\bin\keytool -import -alias <aliasname> -file <path><certificate file name> -keystore %JAVA_HOME%\jre\lib\security\cacerts".

To verify the certificate:

- 1) Click **Start** and select *Run...*
- 2) Type "cmd" and click **OK**.
- 3) Type "<Java Runtime Path>\bin\keytool -printcert -file <path><certificate file name>".

The LDAP directory options are as follows:

- *Enable/Disable LDAP Integration* – This determines whether Call Center provides LDAP directory lookup services. Clicking the **Enable LDAP Integration** button enables the controls for LDAP settings.
- *LDAP Hostname* – This is the network address of the LDAP server.
- *LDAP Port* – This is the port number for the LDAP server. This is compulsory and can be obtained from your system administrator.
- *Search Base:*

- The text box determines the location in the LDAP server tree that Call Center looks in when executing a search.
- The check box, when checked, searches all sub-trees within the search base until the specifications are found.
- *Encrypt Connection* – This option determines whether Call Center uses encryption when connecting to the LDAP server. Note that if encryption is enabled, you may have to use of a different port.
- ("*cn=__Search__Text*") – This option specifies an additional search filter to apply to all directory searches. For example, to include the search criteria in the filter you must include (*cn=*__SEARCH_TEXT__**). Alternatively, in another example, (*telephoneNumber=**) restricts search results to users who have a telephone number assigned.
- *Attribute Mapping* – This table controls the way that Call Center maps attributes returned from the directory server to columns displayed on the list of search results.

In each row of the table, enter an LDAP attribute in the *Remote Attribute* column. In the *Local Attribute* column, enter a corresponding local attribute. Typical Remote Attribute values are "cn", "sn", "telephoneNumber", "mobile", "homePhone", and "mail".
- *Authentication Required* – When this box is checked, Call Center must provide a user name and password to the directory server to conduct searches.
- *DN* – This is the user name Call Center uses when connecting to the LDAP server when *Authentication Required* is checked.
- *Password* – This is the password that corresponds to the authentication *DN*.

13.4.4 Program Shortcuts

You use the program shortcuts settings to create call center shortcuts on your desktop for convenient access to Call Center.

The program shortcuts plug-in allows for the creation of desktop shortcuts on a Windows platform, which when clicked, launches the applications in your default web browser.

- *Add Shortcut* – This button, when clicked, creates a call center shortcut on your desktop.
- *Remove Shortcut* – This button, when clicked, removes the previously created Call Center shortcut. If you did not create a shortcut using the Add Shortcut button, the Remove Shortcut button has no effect.

13.4.5 Call Event Log

This plug-in software provides the ability to store call event statistics content locally on your computer.

- *Enable/Disable Call Event Log Integration* – This double-action button allows you to enable or disable call log archives on your computer.
- *Rotate Log* – This parameter allows you to specify the frequency with which the call log is rotated. You select the frequency from the drop-down list.
- *Open Log Location* – Click this link to go to the place on your computer where the log is stored.

13.5 Settings – Messaging

The Messaging tab allows you to configure various messaging options for Call Center. Currently, e-mail messaging is supported.

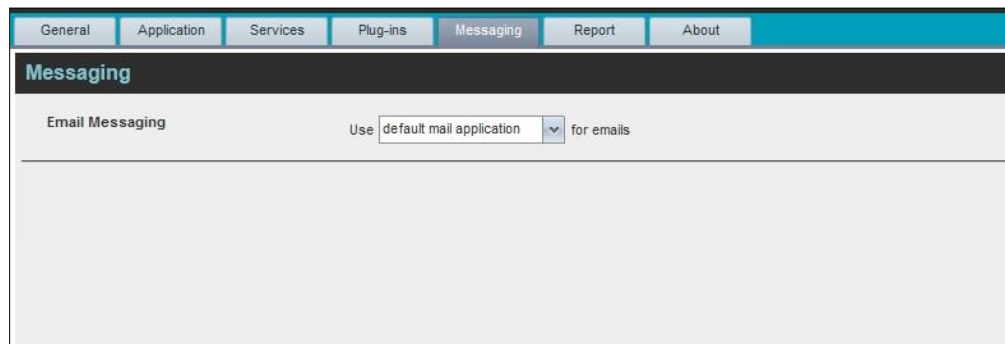


Figure 115 Settings – Messaging

13.5.1 E-mail Messaging

These options allow you to specify the mail client you use for sending e-mail messages.

From the drop-down list, select the mail client to use for e-mails.

If you selected the custom Simple Mail Transfer Protocol (SMTP) option, you also need to configure the following options:

- *Display Name* – This is the name that is displayed in the *From* field.
- *Reply-to Address* – This is the address where reply messages can be sent.
- *Default Subject* – This is the subject that appears when you generate an e-mail message in Call Center.
- *SMTP Host* – This is the IP address of the SMTP host.
- *SMTP Port* – This is the port of the SMTP host.
- *Outgoing SMTP Server requires Authentication* – When this option is set, authentication is required to send e-mails.
- *Username* – This is the name you must enter to authenticate yourself.
- *Password* – This is the password part of your authentication credentials.
- *Mail Type* – This is the type of mail to use.
- *Mail Template* – This is the mail template to use.

NOTE: Verify with your IT personnel that the firewall is configured to allow for this type of messaging.

13.6 Settings – Report

You use the Report tab to configure values to be used as default input parameters for generating reports. If you do not provide any values, system defaults are used. You can change these values as required when generating reports.

The screenshot shows the 'Report' settings page in the Telesystem Hosted Call Center interface. The page is titled 'Report' and is part of the 'Hosted Call Center' application. The user 'Cheryl Baldwin' is logged in. The page contains several sections for configuring report parameters:

- Default Thresholds:** Includes input fields for 'Call Completion', 'Short Duration Call', 'Service Level', and 'Abandoned Call'.
- Date Format:** Offers radio button options for 'MMDD/YYYY' (selected) and 'DDMM/YYYY'.
- Time Format:** Offers radio button options for 'AMPM' (selected) and '24 Hour'.
- Default Start Day Of Week:** A dropdown menu currently set to 'Sunday'.
- Default Service Level Calculations:** Includes several radio button options:
 - Include Overflow Time Transferred Calls
 - Include All Other Transfers
 - Exclude Abandoned Calls
 - Include all abandoned calls
 - Include all abandoned calls except before entrance completes
 - Include Abandoned Calls except in Defined Interval
 Below these options is a text input field for 'Defined Interval For Abandoned Calls' with the value '88'.

At the bottom of the page, there is a footer that reads 'Manage your preferences for Reports' and '5 categories'.

Figure 116 Settings – Report

13.6.1 Default Thresholds

These settings allow you to configure the thresholds that are used by default when you generate reports that require you to provide thresholds. This is useful, if you often use the same threshold values. You can always change a default value, when required.

- **Call Completion** – This setting is used to count the number of ACD calls an agent has completed within a service level during the specified interval. The Call Completion service level can be set to “1” through “7200” seconds.
- **Short Duration Call** – This setting is used to count the number of ACD short duration calls completed by an agent during an interval. You can set the maximum length of a short duration call to “1” through “7200” seconds.

13.6.2 Default Start Day of the Week

The following setting allows you to configure the day of the week to start reports.

- **Default Start Day of Week** – This setting applies to interval-based reports, when the selected sampling period is “Weekly”. It can be set to any day of the week.

13.6.3 Default Service-level Calculations

The following settings allow you to configure default settings used to make service-level calculations.

- *Include Overflow Time Transferred Calls* – Check this box to include calls transferred due to time overflow in service-level calculations.
- *Include All Other Transfers* – Check this box to include calls transferred for other reasons that overflow in service-level calculations.
- *Exclude Abandoned Calls* – Check this box to exclude all abandoned calls from service-level calculations.
- *Include all abandoned calls* – Check this box to include all abandoned calls in service-level calculations.
- *Include all abandoned calls except before entrance completes* – Check this box to include calls abandoned after the entrance message has finished playing in service-level calculations.
- *Include Abandoned Calls except in Defined Interval* – Check this box to include calls abandoned after the time specified by the interval for abandoned calls parameter in service-level calculations.
- *Defined Interval for Abandoned Calls* – If you checked *Include Abandoned Calls except in Defined Interval*, enter the desired interval in this text box in seconds. The *Defined Interval for Abandoned Calls* can be set to “1” through “7200” seconds.

13.7 Settings – About

You use the About tab to view the information about Call Center.

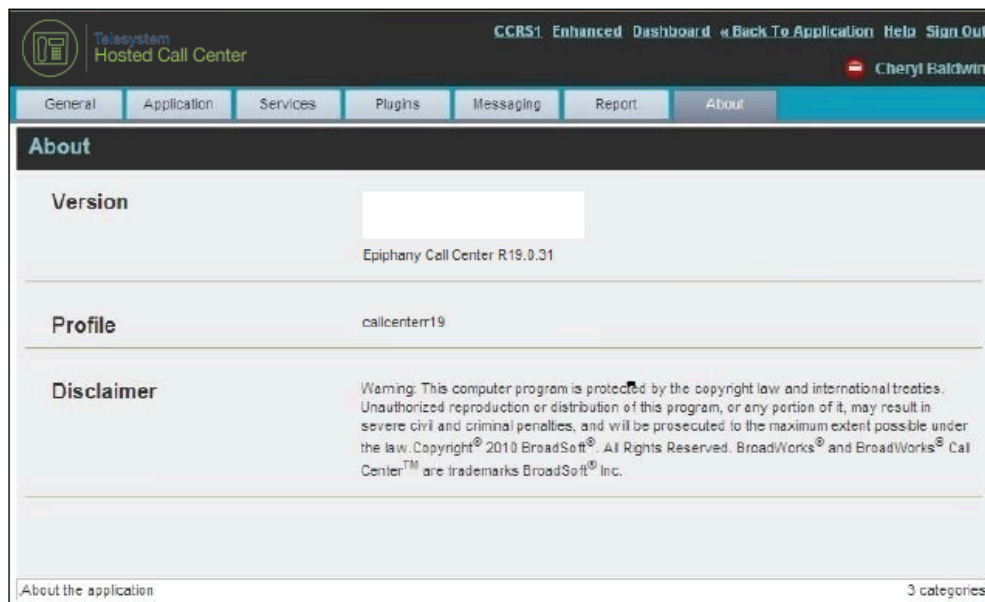


Figure 117 Settings – About

The following information is provided on this page:




- *Version* – This is the name and software version of Call Center client.
- *Profile* – This is the Call Center client profile used.
- *Disclaimer* – This is the Call Center copyright information.

14 Appendix A: Glossary and Definitions

14.1 ACD States

ACD states specify the agent's availability to take calls. The possible call states are those listed in the following table.

An agent can be in one of the ACD states.

ACD State	Icon	Description
<i>Available</i>		<p>Agent is available to receive ACD calls. (Agent can also receive direct calls.)</p> <p>This is the primary ACD state of an agent during the workday. It indicates that the agent is at their workstation and either ready to take a call or on an active call.</p> <p>ACD calls may be delivered to an agent who is in an <i>Available</i> state.</p> <p>The Hosted VoIP Phone System uses both the ACD state and the phone state of the agent to determine whether to route a call to the agent.</p> <p>By default, agents receive calls when they are available and their phone is <i>idle</i>. However, this behavior can be overridden if Call Waiting on agents is enabled for the call center, which allows for new calls when the agent is available and on an active call.</p>
<i>Unavailable</i>		<p>Agent is unavailable to receive ACD calls. (Agent can still receive direct calls.)</p> <p>The <i>Unavailable</i> state should be used when the agent is away from their workstation and not available to take calls.</p> <p>ACD calls are not delivered to agents in an <i>Unavailable</i> state.</p> <p>This state should be used when the agent is at lunch, on a break, in a meeting, or engaged in some other activity while they are at work, but unavailable to take calls.</p>
<i>Wrap-Up</i>		<p>Agent is performing post call work.</p> <p>This state is designed to allow the agent to complete paperwork or other post call procedures associated with the last call.</p> <p>Calls may be delivered to agents in <i>Wrap-Up</i> state depending on the call center configuration.</p> <p>By default, calls are not routed to agents in <i>Wrap-Up</i> state, except when the call center is configured to enable calls to agents in the <i>Wrap-Up</i> state.</p>
<i>Sign-In</i>		<p>The <i>Sign-In</i> state is equivalent to a "clock in", which means that the agent is at their work location but not yet ready to accept incoming calls. Calls are not delivered to the agent in this state.</p> <p><i>Sign-In</i> is a transitional state and agents do not remain in this state; rather they transition to their post sign-in state.</p> <p>It is recommended that agents only be in this state between the time they arrive at work and the time they become available to accept calls.</p>
<i>Sign-Out</i>		<p>The <i>Sign-Out</i> state is equivalent to a "clock out", which means that the agent's workday or shift is completed and they are leaving.</p> <p>Calls are not delivered to the agent in this state.</p> <p>It is recommended not to use this state when agents leave for lunch or breaks during the day. The <i>Unavailable</i> state should be used for that.</p>

In Call Center, an agent can only set their ACD state to "Available", "Unavailable", or "Wrap-Up". A supervisor can set the ACD state of an agent to "Available", "Unavailable", "Wrap-Up", or "Sign-Out".

The *Sign-In* state can only be assigned to an agent through the web portal.

14.2 Agent Skill Levels (Premium Call Center)

Agent skill levels are used to rate the ability of an agent to handle calls in call centers with skill-based routing.

- An agent skill level is an integer between 1 through 20, where 1 indicates the highest skill level.
- A skill level is assigned to an agent for each call center with skill-based routing to which the agent is assigned.
- A skill level is shown as “N/A” for Standard call centers and for call centers with priority-based routing.

14.3 Phone States

Phone states show the state of the monitored agent’s telephone line or the supervisor’s telephone line.

For supervisors, the phone states are displayed as follows:

Phone State	Icon	Description
<i>Idle</i>		Supervisor’s phone is on-hook, which means the supervisor is not on a call.
<i>Busy</i>		Supervisor’s phone is off-hook, which means that the supervisor is on a call.
<i>Ringing</i>		Supervisor’s phone is in <i>alerting</i> state; a call is currently being delivered to the supervisor.
<i>Do Not Disturb</i>		Supervisor has enabled the Do Not Disturb service.
<i>Private</i>		Supervisor has enabled phone status privacy.
<i>Call Forwarding Always</i>		Supervisor has enabled the Call Forwarding Always service.
<i>Unknown</i>		Supervisor is currently not monitored.

For agents, the phone states are combined with their ACD states and are displayed as follows:

Phone State	ACD State	Icon	Description
<i>Idle</i>	<i>Available</i>		Agent’s phone is on-hook and the agent is available to take ACD calls.
<i>Ringing</i>	<i>Available</i>		Agent’s phone is ringing and the agent is available to take the call.
<i>Any</i>	<i>Unavailable, Sign-In, Sign-Out</i>		Agent is not available to take ACD calls.
<i>Idle, Ringing</i>	<i>Wrap-Up</i>		Agent is performing post call work. They may or may not be available to take calls.
<i>Busy</i>	<i>Available, Wrap-Up</i>		Agent’s phone is off-hook, which means that the agent is on a call. Calls may be delivered to agents depending on their call waiting settings and the call center’s call waiting and wrap-up settings.

Phone State	ACD State	Icon	Description
<i>Do Not Disturb</i>	Any		Agent has enabled the Do Not Disturb service. ACD calls are not delivered to an agent in the <i>Do Not Disturb</i> call state. This state is not recommended for Call Center agents. Agents should use the <i>Unavailable ACD</i> state when they need to block new incoming calls temporarily.
<i>Call Forwarding Always</i>	Any		Agent has enabled the Call Forwarding Always service.
<i>Private</i>	Any		Agent has enabled phone status privacy.
<i>Unknown</i>	Any		Agent is currently not monitored.

14.4 Call States

Call states are the states that your current calls can be in. They are as follows:

Call State	Display Name	Display Icon	Call Personality	Call Actions
<i>Ringing In (Local)</i>	Incoming Local		Click To Dial	Answer, End
<i>Ringing In (Remote)</i>	Incoming		Terminator	Answer, Conference, End
<i>Ringing Out, Outgoing</i>	Outgoing		Originator	Conference, End
<i>Active</i>	Active		Any	Transfer, Hold, End, Conference
<i>On Hold</i>	Held		Any	Transfer, Resume, End, Conference
<i>On Hold (Remote)</i>	Held		Any	Transfer, Hold, End, Conference
<i>Active (In Conference)</i>	Active		Conference	Transfer, Hold, End
<i>On Hold (In Conference)</i>	Held		Conference	Resume, Transfer, End
<i>Ringing In (Recalled Call)</i>	Call Recalled		Terminator	Answer, Conference, End

14.5 Call Types

This section defines different types of calls measured in call center statistics.

Name	Description
------	-------------

Name	Description
ACD Call	This is a call delivered to a call center pilot number that is directed to an agent via the ACD function.
Inbound Call	This is a direct call to an agent. Other calls treated as inbound calls include: <ul style="list-style-type: none"> ▪ Calls that a supervisor retrieves from a queue ▪ Calls that an agent receives due to a transfer from another agent (Note that they may have originated as ACD calls.)
Outbound Call	This is an outbound call made by an agent.
Held Call	This is an ACD call that was placed on hold by an agent. Each time an agent places a call on hold, it is counted as a held call.
Transferred Call	This is an ACD call that was transferred to another number. Transfers can be the result of manual transfers by agents, transfers to voice mail because the calls were timed out, and transfers by supervisors to alternate queues. NOTE: A timed-out call is a call that is transferred due to exceeding the maximum wait time in a queue.
Answered Call	This is an ACD call that was answered by an agent.
Abandoned Call	This is an ACD call that entered the queue, but the caller hung up before the call was answered or transferred.
Received Call	This is an ACD call that was received and either answered or abandoned. Overflowed calls are not included.
Overflowed Call	This is an ACD call that was received, but immediately transferred to another destination due to the queue's exceeding the configured maximum queue size or the configured maximum wait time.
Queued Call	This is an ACD call that is not immediately diverted using the Night Service, Holiday Service, Forced Forwarding, or Overflow, and goes to a queue to be distributed to an agent or to wait for an available agent.
Bounced Call	This is a call that has been transferred back to queue because it was not answered by an agent in the specified time.
Stranded Call	This is a call that is in a queue after all agents assigned to the queue have moved to the <i>Sign-Out</i> ACD state.

15 Appendix B: Keyboard Shortcuts

When using keyboard shortcuts, make sure that the main interface window is in focus.

Key	Equivalent Mouse Action	Description
ESC	Click the Close button in a dialog box.	This closes the open dialog box.
ESC	Cancel the changes.	This exits the currently selected editable item, such as a text box.
/	Click the <i>Dialer</i> text box.	This places the cursor in the <i>Dialer</i> text box; it retains the currently selected item (if applicable). NOTE: In Internet Explorer 8, the “/” shortcut key does not always work. Pressing the key clears the default <i>Enter Number</i> text, but does not place the cursor in the input box.
?	Click the <i>Search</i> text box.	This places the cursor in the <i>Search</i> text box; it retains the currently selected item (if applicable).
ARROW DOWN	Click the scroll bar or the next item on a list.	This selects the next item in the <i>Call Console</i> or the <i>Queued Calls</i> pane.
ARROW UP	Click the scroll bar or the previous item in a list.	This selects the previous item in the <i>Call Console</i> or the <i>Queued Calls</i> pane.
PAGE DOWN	Scroll down one page.	This goes to the next page in the <i>Call Console</i> or the <i>Queued Calls</i> pane.
PAGE UP	Scroll up one page.	This goes to the previous page in the <i>Call Console</i> or the <i>Queued Calls</i> pane.
1...9	Select a call in the <i>Call Console</i> .	Pressing 1 selects the first call, pressing 2 selects the second call, and so on.
SPACEBAR	Click Answer on the selected incoming call in the <i>Call Console</i> .	This answers the selected incoming call or if no call is selected, the incoming call that has been waiting the longest. Pressing the SPACEBAR again answers the next longest waiting incoming call, which puts the previously answered call on hold.
<PERIOD>	Click End on the selected call in the <i>Call Console</i> .	This ends the selected call.
ENTER	Click Dial .	If the cursor is placed in the <i>Enter Number</i> text box in the <i>Dialer</i> , the entered digits are dialed.
ENTER	Click Search .	If the cursor is placed in the <i>Search</i> text box, a search is performed.
+	Click Transfer in the <i>Dialer</i> .	This transfers the selected call to the ad hoc number entered in the <i>Dialer</i> .
SHIFT+1..9	Select a ringing call and click Answer .	Pressing SHIFT+1 selects and answers the first ringing call, pressing SHIFT+2 selects and answers the second ringing call, and so on.
SHIFT+1..9	Select an active call and click Hold .	Pressing SHIFT+1 selects and places on hold the first active call, pressing SHIFT+2 selects and answers the second active call, and so on.
SHIFT+1..9	Select a held call and click Retrieve .	Pressing SHIFT+1 selects and retrieves the first held call, pressing SHIFT+2 selects and retrieves the second held call, and so on.
S or s	Click the Settings link.	This goes from the main page to the <i>Settings</i> page.

Key	Equivalent Mouse Action	Description
B or b	Click the Back to Application link.	This goes back from the <i>Settings</i> page to the main page.
R or r	Click the Call History button.	This opens the <i>Call History</i> dialog box.
H or h	Click the Help link.	This opens this guide in a PDF format.
D or d	Click the Dashboard link	This opens the <i>Dashboard</i> or brings the <i>Dashboard</i> to the front if it is already open.
SHIFT+L or SHIFT+I	Click the Sign Out link.	This signs the user out of the application.

Index

- About Call Center, 108
- ACD states, 65, 109
 - Changing by agent, 15
 - Changing for agent, 67
- Actions on calls, 23
- Ad hoc number, dialing, 42
- Adding
 - Conference participant, 48
 - Personal contact, 60
 - Speed dial number, 62
- Agents
 - ACD states, 109
 - Barging in on, 69
 - Changing ACD state by, 15
 - Changing ACD state for, 67
 - Managing, 64
 - Panel, 26
 - Phone and ACD states, 65
 - Picking up calls, 69
 - Real-time statistics about, 81
 - Selecting to monitor, 64
 - Silently monitoring, 68
 - Viewing details, 67
- Answering call, 40
- Application settings, configuring, 100, 101
- Assigning disposition codes, 40
 - Current call, 40
 - Wrap-Up, 40
- Auto Answering calls, 41
- Barge-in and monitoring settings, configuring, 100
- Barging in on agent, 69
- Blind transferring calls, 45
- Busy Camp On, 45
- Call Center
 - Client, supervisor, 8
 - Configuring, 95, 96
 - Getting started, 10
 - Launching from web portal, 10
 - Overview, 8
 - Panels, viewing, 74
 - Selecting for monitoring by supervisor, 72
 - Setting up, 14
 - Signing in, hot desk, 12
 - Signing in, web browser, 11
- Call Console, 20
 - Call states and actions, 23
 - Conference Call panel, 22
 - Current calls, 22
 - Dialer, 21
 - Header bar, 21
- Call Displaying directories below Call Console, 55
- Call History, 30
 - Deleting, 50
 - Dialing from, 44
 - Managing, 50
 - Viewing, 50
- Call Pickup, 69
- Calls
 - Action buttons, 32
 - Answering, 40
 - Assigning disposition codes, 40
 - Auto Answering, 41
 - Blind transferring, 45
 - Camping, 45
 - Dialing
 - Ad hoc number, 42
 - Contact, 43
 - History, 44
 - Search, 44
 - Dragging and dropping, 38
 - Ending, 42
 - Event log, configuring, 105
 - Making outbound, 42
 - Managing, 35
 - Managing conference, 47
 - Modify number to display, 73
 - Open URL, 41
 - Operations quick reference, 36
 - Placing on hold, 45
 - Redialing number, 43
 - Resuming held, 45
 - Saving vCard, 41
 - Silently monitoring
 - Agent, 68
 - In queue, 75
 - States, 111
 - States and actions, 23
 - Transferring, 45
 - Transferring to queue, 46
 - Transferring to top of queue, 78
 - Transferring with consultation, 46
 - Types, 111
 - Viewing, 38
- Camping calls, 45
- Changing
 - ACD state, 15
 - Password, 15, 96
- Common panel, 26
- Conference
 - Adding participant, 48
 - Ending, 49
 - Ending participant, 49
 - Holding, 48
 - Holding participant, 48
 - Leaving, 49
 - Managing, 47
 - Resuming, 48
 - Resuming participant, 48
 - Starting, 47
 - Three-Way, 47
- Conference Call, panel, 22
- Configuring
 - Application settings, 100, 101
 - Barge-in and monitoring settings, 100
 - Call Center client, 95
 - Call event log, 105
 - Call notification settings, 102
 - E-mail messaging, 106

- General settings, 96
- General settings, account, 96
- Hotel Guest, 97
- Language, 97
- LDAP settings, 103
- Messaging, 106
- Outlook integration, 103
- Plug-ins, 102
- Program shortcuts, 104
- Report settings, 107
- Screen Pop, 97
- Workspace settings, 98
- Consultation
 - Transferring calls, 46
- Contacts
 - Dialing, 43
 - Displaying directories below Call Console, 55
 - E-mailing, 51
 - Managing, 52
 - Organizing, 57
 - Searching, 58
 - Selecting display order, 57
 - Showing or hiding contact details, 56
 - Showing or hiding directories, 54
 - Showing or hiding directory content, 56
 - Sorting, 57
 - Viewing, 54
- Contacts pane, 23
 - Agents panel, 26
 - Common panel, 26
 - Custom directory panel, 27
 - Directories panel, 29
 - Enterprise/Group panel, 26
 - Outlook panel, 28
 - Personal panel, 26
 - Queues panel, 27
 - Search panel, 25
 - Speed Dial panel, 27
- Controls
 - Action buttons, 32
 - Call Center, 31
- Current calls, 22
 - Viewing, 38
- Custom directory panel, 27
- Dashboard
 - Supervisor, 79
- Default service-level calculations, report settings, 108
- Definitions, 109
 - ACD states, 109
 - Agent phone and ACD states, 65
 - Call states, 111
 - Call types, 111
 - Phone states, 110
- Deleting
 - Call History, 50
 - Personal contact, 61
 - Speed dial number, 63
- Dialer, 21
- Dialing
 - Ad hoc number, 42
 - Contact, 43
 - History, 44
 - Search, 44
- Directories
 - Displaying below Call Console, 55
- Directories panel, 29
- Directory
 - Agents, 26
 - Custom, 27
 - Enterprise/Group, 26
 - Outlook, 28
 - Personal, 26, 59
 - Queues, 27
 - Search, 25
 - Searching, 58
 - Sort, 57
 - Speed Dial, 27, 61
 - Viewing, 54
- Disabling, services, 16
- Disposition codes, assigning to calls, 40
- Dragging and dropping calls, 38
- E-mail
 - Configuring options for, 106
- E-mailing contacts, 51
- Enabling
 - Forced Forwarding, 75
 - Night Service Override, 75
 - Services, 16
- Ending
 - Call, 42
 - Conference, 49
 - Conference participant, 49
- Enterprise panel, 26
- Exploring workspace, 17
- Forced Forwarding, enabling, 75
- General settings, configuring, 96
- Generating
 - Reports, 83
 - Enhanced, 83
- Global Message Area, 19
- Glossary, 109
- Group panel, 26
- Grouping, queued calls, 74
- Header bar, 21
- Help, getting, 13
- Holding
 - Call, 45
 - Conference, 48
 - Conference participant, 48
- Hot desk sign in, 12
- Hotel Guest settings, configuring, 97
- Incoming call, viewing details, 39
- Interface
 - Supervisor's Dashboard, 79
- Keyboard shortcuts, 113
- Language, configuring, 97
- Launching Call Center from web portal, 10

- LDAP, configuring, 103
- Leaving conference, 49
- Logged user information, 19
- Logo pane, 18
 - Global Message Area, 19
 - Links, 19
 - Logged user information, 19
- Making outbound calls, 42
- Managing
 - Agents, 64
 - Call History, 50
 - Calls, 35
 - Conference calls, 47
 - Contacts, 52
 - Personal contacts, 59
 - Queued calls, 70
 - Queued calls, promoting, 76
 - Queued calls, retrieving, 76
 - Reordering, calls in queue, 77
 - Speed dial numbers, 61
 - Transferring calls between queues, 77
 - Transferring calls from queue to agent, 77
 - Transferring calls to ad hoc number, 77
- Messaging, configuring, 106
- Modifying number of calls to display, 73
- Modifying speed dial number, 62
- Monitoring
 - Phone state
 - Agents, 65
 - Silently
 - Agent's call, 68
 - Next queued call, 75
- Night Service Override, enabling, 75
- Notification, configuring, 102
- Ordering
 - Queued calls, 75
- Organizing, contacts, 57
- Outgoing CLID, setting, 42
- Outlook integration, configuring, 103
- Outlook panel, 28
- Pane
 - Call Console, 20
 - Contacts, 23
 - Queued Calls, 70
- Panel
 - Agents, 26
 - Conference Call, 22
 - Custom directory, 27
 - Directories, 29
 - Enterprise/Group, 26
 - Outlook, 28
 - Personal, 26
 - Queues, 27
 - Search, 25
 - Speed Dial, 27
- Participant
 - Adding to conference, 48
 - Ending in conference, 49
 - Holding in conference, 48
 - Resuming in conference, 48
- Password, changing, 15, 96
- Personal contacts
 - Adding, 60
 - Deleting, 61
 - Managing, 59
- Personal panel, 26
- Phone states, 65, 110
- Picking up agent's call, 69
- Plug-ins settings, configuring, 102
- Pop-up notification, 39
- Program shortcuts, configuring, 104
- Promoting calls in queue, 76
- Pulling out directories, 55
- Queue
 - Position call in, reorder, 77
 - Promoting calls, 76
 - Real-time statistics about, 79
 - Retrieving calls from, 76
 - Transferring call, 46
 - Transferring calls between, 77
 - Transferring calls to ad hoc number, 77
 - Transferring calls to agent, 77
 - Transferring calls to top, 78
- Queued calls
 - Grouping, 74
 - Managing, 70
 - Monitoring, 75
 - Ordering, 75
 - Viewing details, 74
- Queued Calls, pane, 70
- Queues panel, 27
- Quick reference, call operations, 36
- Real-time statistics, 79
- Redialing number, 43
- Reordering, calls in queue, 77
- Report settings
 - Configuring, 107
 - Date and time, 107
 - Default service-level calculations, 108
 - Default thresholds, 107
- Reports
 - Generating, 83
 - Managing scheduled, 94
 - Running enhanced, 83
 - Scheduling enhanced, 89
- Resuming
 - Conference, 48
 - Conference participant, 48
 - Held call, 45
- Scheduling Enhanced Report, 89
- Screen Pop, configuring, 97
- Search panel, 25
- Search, dialing from, 44
- Searching for contacts, 58
- Selecting
 - Agents to monitor, 64
 - Call Centers to monitor by supervisor, 72

- Services, enabling or disabling, 16
- Setting, outgoing CLID, 42
- Settings
 - About, 108
 - Application, 100, 101
 - Barge-in and monitoring, 100
 - General, 96
 - Hotel Guest, 97
 - Language, 97
 - Screen Pop, 97
 - Workspace, 98
 - Messaging, 106
 - E-mail messaging, 106
 - Plug-ins, 102
 - Call event log, 105
 - LDAP, 103
 - Notification, 102
 - Outlook, 103
 - Program shortcuts, 104
 - Report, 107
- Shortcuts, keyboard, 113
- Sign in
 - Hot desk, 12
 - Web browser, 11
- Sign out, 13
- Sign-in
 - Restrictions, 13
- Silent Monitoring, 68
- Sorting, contacts, 57
- Speed dial numbers
 - Adding, 62
 - Deleting, 63
 - Managing, 61
 - Modifying, 62
- Speed Dial panel, 27
- Starting Three-Way Conference, 47
- States
 - ACD, 109
 - Calls, 111
 - User's phone line, 110
- Statistics
 - Agent information, 81
 - Agents and queues, real-time, 79
 - Dashboard, 79
 - Queue information, 79
 - Selecting information to display, 81
- Supervisors
 - Changing agent's ACD state, 67
 - Selecting call centers to monitor, 72
 - Viewing agent statistics, 81
 - Viewing queue statistics, 79
- Transferring calls, 45
 - Blind, 45
 - Consultation, 46
 - Queue, 46
 - Supervisor
 - Queue to ad hoc number, 77
 - Queue to agent, 77
 - Queues, between, 77
 - Top of queue, 78
- URL, opening for a call, 41
- User interface
 - Action buttons, 32
 - Agents panel, 26
 - Call Console, 20
 - Call History, 30
 - Common panel, 66
 - Conference Call panel, 22
 - Contacts pane, 23
 - Controls, 31
 - Custom directory panel, 27
 - Dialer, 21
 - Directories panel, 29
 - Enterprise/Group panel, 26
 - Header bar, 21
 - Logged user state, 19
 - Outlook panel, 28
 - Personal panel, 26
 - Queued Calls pane, 70
 - Queues panel, 27
 - Search panel, 25
 - Speed Dial panel, 27
- vCard, saving, 41
- Viewing
 - Agent details, 67
 - Call Center panels, 74
 - Call History, 50
 - Calls, 38
 - Contacts, 54
 - Current calls, 38
 - Directory, 54
 - Incoming call details, 39
 - Queued calls details, 74
 - Show or hide, 74
- Web browser sign in, 11
- Workspace
 - Call Console, 20
 - Call History, 30
 - Configuring settings, 98
 - Contacts pane, 23
 - Controls, 31
 - Exploring, 17
 - Logo pane, 18