

Log in to the base via the internal IP address (pwd 0000) , then choose:
Settings -> Telephony -> Connections -> Edit

Gigaset C530 IP

Home Settings Status

Network
Telephony
Connections
Audio
Number Assignment
Call Divert
Dialling Plans
Network mailboxes
Advanced VoIP Settings
Messaging
Info Services
Directories
Management

Overview of connections


Name	Provider	Status	Active	
Fixed line		Disconnected		Edit
Gigaset.net	Gigaset Communications	Disabled	<input type="checkbox"/>	Edit
1. IP1	Other provider	Not configured	<input checked="" type="checkbox"/>	Edit
2. 0413403391	Other provider	Registered	<input checked="" type="checkbox"/>	Edit
3. 0413403389	Other provider	Registered	<input checked="" type="checkbox"/>	Edit
4. IP4	Other provider	Not configured	<input type="checkbox"/>	Edit
5. IP5	Other provider	Not configured	<input type="checkbox"/>	Edit
6. IP6	Other provider	Not configured	<input type="checkbox"/>	Edit

Provider or PBX Profile

A profile contains all relevant settings for your provider or phone system (PBX).

Automatic check for profile updates: Yes No

Update profile



Gigaset C530 IP

Home Settings Status

Network
Telephony
Connections
Audio
Number Assignment
Call Divert
Dialling Plans
Network mailboxes
Advanced VoIP Settings
Messaging
Info Services
Directories
Management

2. IP Connection

Assign a connection name or actual phone number for identification.

Connection name or number:

VoIP Configuration / Profile Download


Start Configuration Assistant

Provider: Other provider

Profile version:

Personal Provider Data

Authentication name:

Authentication password: 


Username:

Display name:

Show advanced settings

Set **Cancel** **Delete connection**

Choose "Edit"
Click in "Show advanced settings":

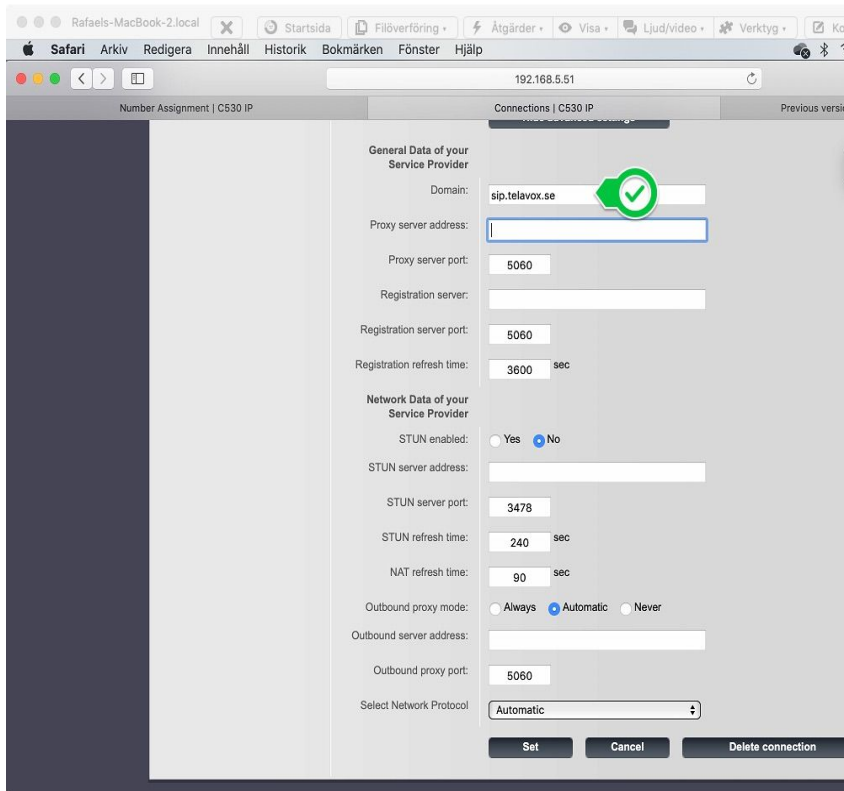

Under Settings -> Telephony -> Connections -> Number Assignment can you set on which Phone you want to have you incoming calls on.

