


ExlfilmplusTM LTG

Light Gauge Shrink Film




Exlfilmplus[®]LTG, the “original” light gauge shrink film with its unique formulation, is 26% thinner than other traditional shrink films on the market. And covers 36% more product per kilo. If you want excellent performance at a lighter gauge and substantial cost savings, LTG is the best choice! Ideally replaces competitive 15 microns polyolefin. Best-suited applications are: printed materials, gift wrap, board games, irregular shapes and computer software.

- Operates on all types of equipment and sealing technology, ensuring excellent performance across a wide range of applications.
- Reduces downtime saving money.
- Maximum available shrinkage ensures that the film conforms to the most irregular-shaped products, providing superior product presentation.
- Outstanding clarity enhances the retail product presentation.
- Exceptional tensile strength and tear resistance gives added durability and toughness to ensure your product is better protected.
- Complies with standards for direct food contact.

CROSSLINKING TECHNOLOGY

This innovative technique makes Exlfilmplus[®] Shrink Films one of the toughest and most versatile on the market. This is because the polymer chains are permanently bound into a network, significantly increasing their heat stability and strength. Our films have an inherently greater window of seal and shrink performance at a broader range of temperatures.

- **Prevention of Buildup** on wires and knives during sealing
- **Prevention of Film Burn-Through** in heat tunnels
- **Increased Film Toughness** on the finished package



Thickness [μm]	Length [m]						Width [mm]	
	Flat			Centerfolded			Flat	Centerfolded
9	27.600	13.800	9.200	4.600	4.600	2.300	From 200 up to 1200 width increments of 10mm	From 2 x 150 up to 2 x 1.000 width increments of 50mm
11	22.500	11.250	7.500	3.750	3.750	1.875		
12,5	19.800	9.900	6.600	3.300	3.300	1.650		

Cardboard core internal 76,6mm

Other specifications available upon request


Properties		Test Method	Thickness (μm)		
			9	11	12,5
Yield (m ² /kg)		-	120,8	98,8	86,9
Unit Weight (g/m ²)		-	8,3	10,1	11,5
Heat Shrinkage (%)	MD	60 °C, air and 5 min MIE 002	2		
	TD		4		
	MD	90 °C, air and 5 min MIE 002	10		
	TD		20		
	MD	120 °C, air and 5 min MIE 002	73		
	TD		73		
Tensile Strength (MPa)	MD	ASTM D882	100	110	115
	TD		100	120	120
Elongation at Break (%)	MD		120	130	130
	TD		90	115	120
Haze (%)		ASTM D 1003	2	2,4	2,7
Gloss at 20° (%)		ASTM D 2457	130		
Coefficient of friction		ASTM D 1894	0,16		
OTR ⁽¹⁾ (cm ³ /(m ² .24h.atm))		ASTM D 3985/ASTM F 1927	11 000		
WVTR ⁽²⁾ (g /h.m ²)		ASTM E 96/E96M	0,8		

Note: These values are typical and not intended as limiting specifications.

⁽¹⁾12,5μm, 23°C & dry gas inside/dry gas outside. ⁽²⁾ 12,5μm 50% RH, 38°C.


Storage time should not exceed 3 months. The maximum storage temperature for optimum performance is 35°C.

Yield

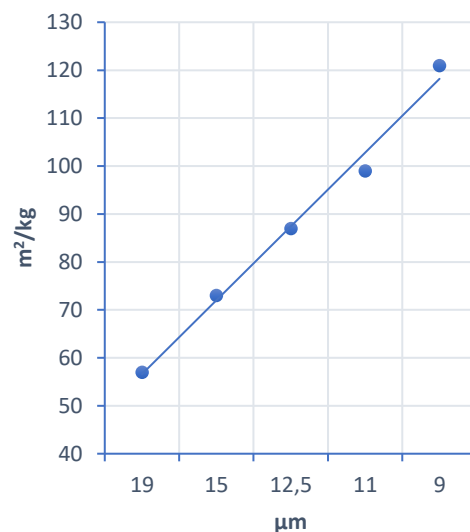

Fibope comply with the requirements and regulations which state that materials may be used in food contact applications. For more information contact our technical support team.

While we believe them to be reliable the statements and information herein are only for general guidance and are not warranties or guarantees for accuracy and completeness. The use must, by test or otherwise, determine suitability for this purpose. Our standard term and conditions of sale apply exclusively to all orders, and all liability for damages of any kind, including consequential exceeding purchase price is excluded. No one is authorized by us to make oral warranties. We reserve the right to make changes without notice or obligation in our products and publications.

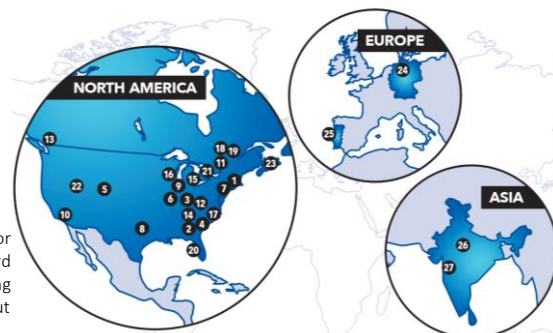

ipg intertape polymer group™

Estrada da Praia, nº 1087
4740 – 696 Barqueiros BCL
Portugal
Tel.: +351 253 859 270
Email: fibope@fibope.pt

FIBOPE PORTUGUESA – FILMES BIORIENTADOS, SA is an industrial company dedicated to the production of flexible films for packaging, integrated in the group "Intertape Polymer, Inc.", of Canada. We produce films based on polyolefins, bi-oriented and co-extruded (polyolefin shrink film) in multi-layers. Being a modern unit based on a favorable costs structure and advanced production techniques, it is able to meet the needs of its customers.

FIBOPE practices a continuous policy of quality and development of its capacities to satisfy the requirements of the customers regarding the products and services it offers, being certified since 2001, according to NP EN ISO 9001: 2008 and from 2013 according to the BRC / IOP reference Packaging.

The quality of the products Exfilm®, Exfilmplus® and Exfilmfresh® is constantly tested in our laboratory, equipped with highly sophisticated equipment and qualified technicians, allowing to guarantee quality and consistency.

The main applications are directed to the packaging of food products, cosmetics, paper and display market in general. The concept of total compliance with our customers guides daily activities and differentiates FIBOPE from competitors.